

# MX25L25645G

3V, 256M-BIT [x 1/x 2/x 4]  
CMOS MXSMIO<sup>®</sup> (SERIAL MULTI I/O)  
FLASH MEMORY

## ***Key Features***

- *Protocol Support - Single I/O, Dual I/O and Quad I/O*
- *Supports DTR (Double Transfer Rate) Mode*
- *Supports clock frequencies up to 133MHz*

## Contents

|                                                                                |           |
|--------------------------------------------------------------------------------|-----------|
| <b>1. FEATURES .....</b>                                                       | <b>5</b>  |
| <b>2. GENERAL DESCRIPTION .....</b>                                            | <b>6</b>  |
| Table 1. Read performance Comparison .....                                     | 6         |
| <b>3. PIN CONFIGURATIONS .....</b>                                             | <b>7</b>  |
| <b>4. PIN DESCRIPTION .....</b>                                                | <b>7</b>  |
| <b>5. BLOCK DIAGRAM.....</b>                                                   | <b>8</b>  |
| <b>6. DATA PROTECTION.....</b>                                                 | <b>9</b>  |
| Table 2. Protected Area Sizes .....                                            | 10        |
| Table 3. 4K-bit Secured OTP Definition .....                                   | 11        |
| <b>7. Memory Organization.....</b>                                             | <b>12</b> |
| Table 4. Memory Organization .....                                             | 12        |
| <b>8. DEVICE OPERATION .....</b>                                               | <b>13</b> |
| 8-1. 256Mb Address Protocol.....                                               | 16        |
| 8-2. Quad Peripheral Interface (QPI) Read Mode .....                           | 17        |
| <b>9. COMMAND DESCRIPTION .....</b>                                            | <b>18</b> |
| Table 5. Command Set.....                                                      | 18        |
| 9-1. Write Enable (WREN).....                                                  | 23        |
| 9-2. Write Disable (WRDI).....                                                 | 24        |
| 9-3. Factory Mode Enable (FMEN) .....                                          | 25        |
| 9-4. Read Identification (RDID) .....                                          | 26        |
| 9-5. Release from Deep Power-down (RDP), Read Electronic Signature (RES) ..... | 27        |
| 9-6. Read Electronic Manufacturer ID & Device ID (REMS).....                   | 29        |
| 9-7. QPI ID Read (QPIID) .....                                                 | 30        |
| Table 6. ID Definitions .....                                                  | 30        |
| 9-8. Read Status Register (RDSR) .....                                         | 31        |
| 9-9. Read Configuration Register (RDCR).....                                   | 32        |
| Table 7. Status Register .....                                                 | 35        |
| Table 8. Configuration Register.....                                           | 36        |
| Table 9. Output Driver Strength Table .....                                    | 37        |
| Table 10. Dummy Cycle and Frequency Table (MHz).....                           | 37        |
| 9-10. Write Status Register (WRSR).....                                        | 38        |
| Table 11. Protection Modes.....                                                | 39        |
| 9-11. Enter 4-byte mode (EN4B) .....                                           | 42        |
| 9-12. Exit 4-byte mode (EX4B) .....                                            | 42        |
| 9-13. Read Data Bytes (READ) .....                                             | 43        |
| 9-14. Read Data Bytes at Higher Speed (FAST_READ) .....                        | 44        |
| 9-15. Dual Output Read Mode (DREAD) .....                                      | 45        |
| 9-16. 2 x I/O Read Mode (2READ) .....                                          | 46        |
| 9-17. Quad Read Mode (QREAD) .....                                             | 47        |
| 9-18. 4 x I/O Read Mode (4READ) .....                                          | 48        |

|            |                                                                               |            |
|------------|-------------------------------------------------------------------------------|------------|
| 9-19.      | 4 x I/O Double Transfer Rate Read Mode (4DTRD)                                | 50         |
| 9-20.      | Preamble Bit                                                                  | 52         |
| 9-21.      | 4 Byte Address Command Set                                                    | 56         |
| 9-22.      | Burst Read                                                                    | 59         |
| 9-23.      | Performance Enhance Mode - XIP (execute-in-place)                             | 60         |
| 9-24.      | Sector Erase (SE)                                                             | 63         |
| 9-25.      | Block Erase (BE32K)                                                           | 64         |
| 9-26.      | Block Erase (BE)                                                              | 65         |
| 9-27.      | Chip Erase (CE)                                                               | 66         |
| 9-28.      | Page Program (PP)                                                             | 67         |
| 9-29.      | 4 x I/O Page Program (4PP)                                                    | 69         |
| 9-30.      | Deep Power-down (DP)                                                          | 70         |
| 9-31.      | Enter Secured OTP (ENSO)                                                      | 71         |
| 9-32.      | Exit Secured OTP (EXSO)                                                       | 71         |
| 9-33.      | Write Security Register (WRSCUR)                                              | 72         |
| 9-34.      | Read Security Register (RDSCUR)                                               | 73         |
|            | Table 12. Security Register Definition                                        | 74         |
| 9-35.      | Write Protection Selection (WPSEL)                                            | 75         |
| 9-36.      | Advanced Sector Protection                                                    | 77         |
|            | Table 13. Lock Register                                                       | 78         |
|            | Table 14. SPB Register                                                        | 79         |
|            | Table 15. DPB Register                                                        | 81         |
| 9-37.      | Program/Erase Suspend/Resume                                                  | 83         |
| 9-38.      | Erase Suspend                                                                 | 83         |
| 9-39.      | Program Suspend                                                               | 83         |
| 9-40.      | Write-Resume                                                                  | 85         |
| 9-41.      | No Operation (NOP)                                                            | 85         |
| 9-42.      | Software Reset (Reset-Enable (RSTEN) and Reset (RST))                         | 85         |
| 9-43.      | Read SFDP Mode (RDSFDP)                                                       | 87         |
|            | Table 16. Signature and Parameter Identification Data Values                  | 88         |
|            | Table 17. Parameter Table (0): JEDEC Flash Parameter Tables                   | 90         |
|            | Table 18. Parameter Table (1): 4-Byte Instruction Tables                      | 97         |
|            | Table 19. Parameter Table (2): Macronix Flash Parameter Tables                | 99         |
| <b>10.</b> | <b>RESET</b>                                                                  | <b>101</b> |
|            | Table 20. Reset Timing-(Power On)                                             | 101        |
|            | Table 21. Reset Timing-(Other Operation)                                      | 101        |
| <b>11.</b> | <b>POWER-ON STATE</b>                                                         | <b>102</b> |
| <b>12.</b> | <b>ELECTRICAL SPECIFICATIONS</b>                                              | <b>103</b> |
|            | Table 22. ABSOLUTE MAXIMUM RATINGS                                            | 103        |
|            | Table 23. CAPACITANCE TA = 25°C, f = 1.0 MHz                                  | 103        |
|            | Table 24. DC CHARACTERISTICS (Temperature = -40°C to 85°C, VCC = 2.7V - 3.6V) | 105        |
|            | Table 25. AC CHARACTERISTICS (Temperature = -40°C to 85°C, VCC = 2.7V - 3.6V) | 106        |



|                                                             |            |
|-------------------------------------------------------------|------------|
| <b>13. OPERATING CONDITIONS</b>                             | <b>108</b> |
| Table 26. Power-Up/Down Voltage and Timing                  | 110        |
| 13-1. INITIAL DELIVERY STATE                                | 110        |
| <b>14. ERASE AND PROGRAMMING PERFORMANCE</b>                | <b>111</b> |
| <b>15. ERASE AND PROGRAMMING PERFORMANCE (Factory Mode)</b> | <b>111</b> |
| <b>16. DATA RETENTION</b>                                   | <b>112</b> |
| <b>17. LATCH-UP CHARACTERISTICS</b>                         | <b>112</b> |
| <b>18. ORDERING INFORMATION</b>                             | <b>113</b> |
| <b>19. PART NAME DESCRIPTION</b>                            | <b>114</b> |
| <b>20. PACKAGE INFORMATION</b>                              | <b>115</b> |
| 20-1. 16-pin SOP (300mil)                                   | 115        |
| 20-2. 8-pins SOP (200mil)                                   | 116        |
| 20-3. 8-land WSON (8x6mm)                                   | 117        |
| 20-4. 8-land WSON (6x5mm)                                   | 118        |
| 20-5. 24-Ball BGA (4x6 ball array)                          | 119        |
| 20-6. 24-Ball BGA (5x5 ball array)                          | 120        |
| <b>21. REVISION HISTORY</b>                                 | <b>121</b> |

**3V 256M-BIT [x 1/x 2/x 4] CMOS MXSMIO® (SERIAL MULTI I/O)  
FLASH MEMORY****1. FEATURES****GENERAL**

- Supports Serial Peripheral Interface -- Mode 0 and Mode 3
- Single Power Supply Operation
  - 2.7 to 3.6 volts for read, erase, and program operations
- 268,435,456 x 1 bit structure  
or 134,217,728 x 2 bits (two I/O mode) structure  
or 67,108,864 x 4 bits (four I/O mode) structure
- Protocol Support
  - Single I/O, Dual I/O and Quad I/O
- Latch-up protected to 100mA from -1V to Vcc +1V
- Low Vcc write inhibit is from 1.5V to 2.5V
- Fast read for SPI mode
  - Supports clock frequencies up to 133MHz for all protocols
  - Supports Fast Read, 2READ, DREAD, 4READ, QREAD instructions
  - Supports DTR (Double Transfer Rate) Mode
  - Configurable dummy cycle number for fast read operation
- Supports Performance Enhance Mode - XIP (execute-in-place)
- Quad Peripheral Interface (QPI) available
- Equal 4K byte sectors, or Equal Blocks with 32K bytes or 64K bytes each
  - Any Block can be erased individually
- Programming :
  - 256byte page buffer
  - Quad Input/Output page program(4PP) to enhance program performance
- Typical 100,000 erase/program cycles
- 20 years data retention

**SOFTWARE FEATURES**

- Input Data Format
  - 1-byte Command code
- Advanced Security Features
  - Block lock protection

The BP0-BP3 and T/B status bits define the size of the area to be protected against program and erase instructions

  - Individual sector protection function (Solid Protect)

- Additional 4K bit secure OTP
  - Features unique identifier
  - Factory locked identifiable, and customer lockable
- Command Reset
- Program/Erase Suspend and Resume operation
- Electronic Identification
  - JEDEC 1-byte manufacturer ID and 2-byte device ID
  - RES command for 1-byte Device ID
  - REMS command for 1-byte manufacturer ID and 1-byte device ID
- Supports Serial Flash Discoverable Parameters (SFDP) mode

**HARDWARE FEATURES**

- SCLK Input
  - Serial clock input
- SI/SIO0
  - Serial Data Input or Serial Data Input/Output for 2 x I/O read mode and 4 x I/O read mode
- SO/SIO1
  - Serial Data Output or Serial Data Input/Output for 2 x I/O read mode and 4 x I/O read mode
- WP#/SIO2
  - Hardware Write Protection or Serial Data Input/Output for 4 x I/O read mode
- RESET#/SIO3
  - Hardware Reset pin or Serial Data Input/Output for 4 x I/O read mode
- RESET#
  - Hardware Reset pin
- NC/SIO3
  - No Connection or Serial Data Input/Output for 4 x I/O read mode
- PACKAGE
  - 16-pin SOP (300mil)
  - 8-pins SOP (200mil)
  - 8-land WSON (8x6mm, 6x5mm)
  - 24-ball BGA (4x6 ball array)
  - 24-Ball BGA (5x5 ball array)
  - **All devices are RoHS Compliant and Halogen-free**

## 2. GENERAL DESCRIPTION

MX25L25645G is 256Mb bits Serial NOR Flash memory, which is configured as 33,554,432 x 8 internally. When it is in two or four I/O mode, the structure becomes 134,217,728 bits x 2 or 67,108,864 bits x 4.

MX25L25645G features a serial peripheral interface and software protocol allowing operation on a simple 3-wire bus while it is in single I/O mode. The three bus signals are a clock input (SCLK), a serial data input (SI), and a serial data output (SO). Serial access to the device is enabled by CS# input.

When it is in two I/O read mode, the SI pin and SO pin become SIO0 pin and SIO1 pin for address/dummy bits input and data output. When it is in four I/O read mode, the SI pin, SO pin, WP# and RESET# pin (of the 8-pin packages) become SIO0 pin, SIO1 pin, SIO2 pin and SIO3 pin for address/dummy bits input and data output.

The MX25L25645G MXSMIO® (Serial Multi I/O) provides sequential read operation on the whole chip.

After program/erase command is issued, auto program/erase algorithms which program/erase and verify the specified page or sector/block locations will be executed. Program command is executed on byte basis, or page (256 bytes) basis, or word basis. Erase command is executed on 4K-byte sector, 32K-byte block, or 64K-byte block, or whole chip basis.

To provide user with ease of interface, a status register is included to indicate the status of the chip. The status read command can be issued to detect completion status of a program or erase operation via WIP bit.

Advanced security features enhance the protection and security functions, please see security features section for more details.

When the device is not in operation and CS# is high, it is put in standby mode.

The MX25L25645G utilizes Macronix's proprietary memory cell, which reliably stores memory contents even after 100,000 program and erase cycles.

**Table 1. Read performance Comparison**


| Numbers of Dummy Cycles | Fast Read (MHz) | Dual Output Fast Read (MHz) | Quad Output Fast Read (MHz) | Dual IO Fast Read (MHz) | Quad IO Fast Read (MHz) | Quad I/O DT Read (MHz) |
|-------------------------|-----------------|-----------------------------|-----------------------------|-------------------------|-------------------------|------------------------|
| 4                       | -               | -                           | -                           | 80*                     | 54                      | -                      |
| 6                       | -               | -                           | -                           | -                       | 80*                     | 54*                    |
| 8                       | 120*/133R       | 120*/133R                   | 120*/133R                   | 120/133R                | 84/104R                 | 70/80R                 |
| 10                      | -               | -                           | -                           | -                       | 120/133R                | 84/100R                |

**Notes:**


1. \* Default Status.
2. R mean VCC range = 3.0V-3.6V.

## 3. PIN CONFIGURATIONS


### 8-PIN SOP (200mil)

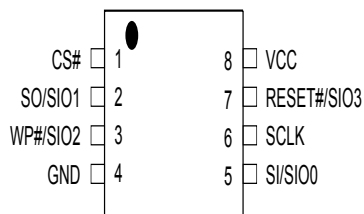


### 8-WSON (8x6mm, 6x5mm)

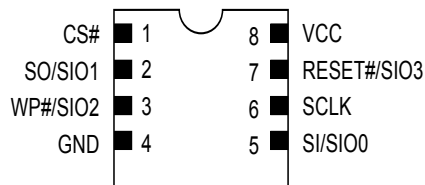


### 24-Ball BGA (4x6 ball array) TOP View

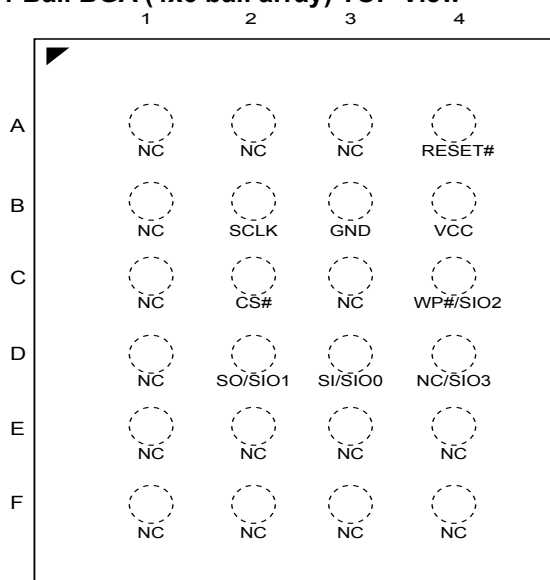

### 16-PIN SOP (300mil)

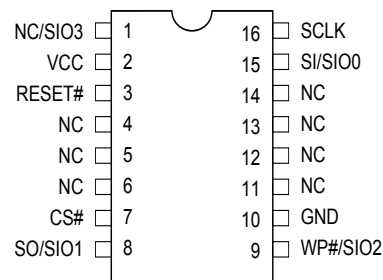

### 24-Ball BGA (5x5 ball array) TOP View

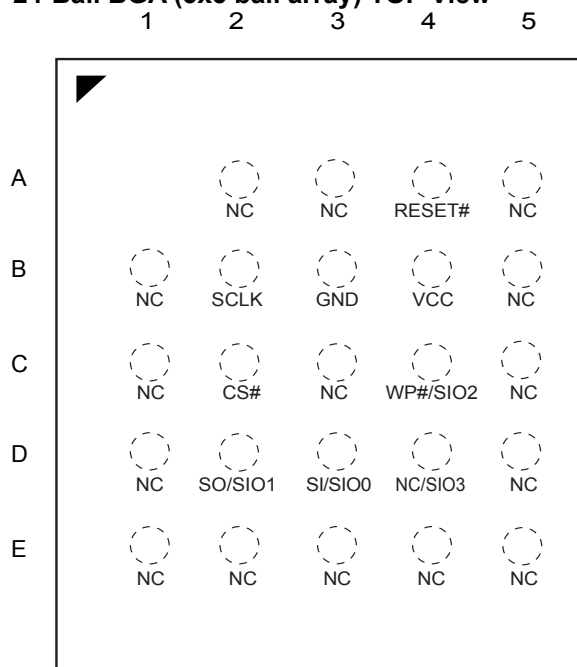


## 4. PIN DESCRIPTION

| SYMBOL       | DESCRIPTION                                                                                 |
|--------------|---------------------------------------------------------------------------------------------|
| CS#          | Chip Select                                                                                 |
| SI/SIO0      | Serial Data Input (for 1 x I/O)/ Serial Data Input & Output (for 2xI/O or 4xI/O read mode)  |
| SO/SIO1      | Serial Data Output (for 1 x I/O)/ Serial Data Input & Output (for 2xI/O or 4xI/O read mode) |
| SCLK         | Clock Input                                                                                 |
| WP#*/SIO2    | Write Protection Active Low or Serial Data Input & Output (for 4xI/O read mode)             |
| RESET#*/SIO3 | Hardware Reset Pin Active low or Serial Data Input & Output (for 4xI/O read mode)           |
| NC/SIO3      | NC or Serial Data Input & Output (for 4xI/O read mode)                                      |
| RESET#*      | Hardware Reset Pin Active low                                                               |
| VCC          | + 3V Power Supply                                                                           |
| GND          | Ground                                                                                      |
| NC           | No Connection                                                                               |

### \*Notes:

1. The pin of RESET# or WP#/SIO2 will remain internal pull up function while this pin is not physically connected in system configuration. However, the internal pull up function will be disabled if the system has physical connection to RESET# or WP#/SIO2 pin.
2. RESET#/SIO3 pin must be controlled by the system, while it functions as hardware RESET pin.
3. RESET#/SIO3 pin must be connected to VCC (Floating is not allowed), if the system is not using the functions of either 4 x IO or hardware RESET.

## 5. BLOCK DIAGRAM

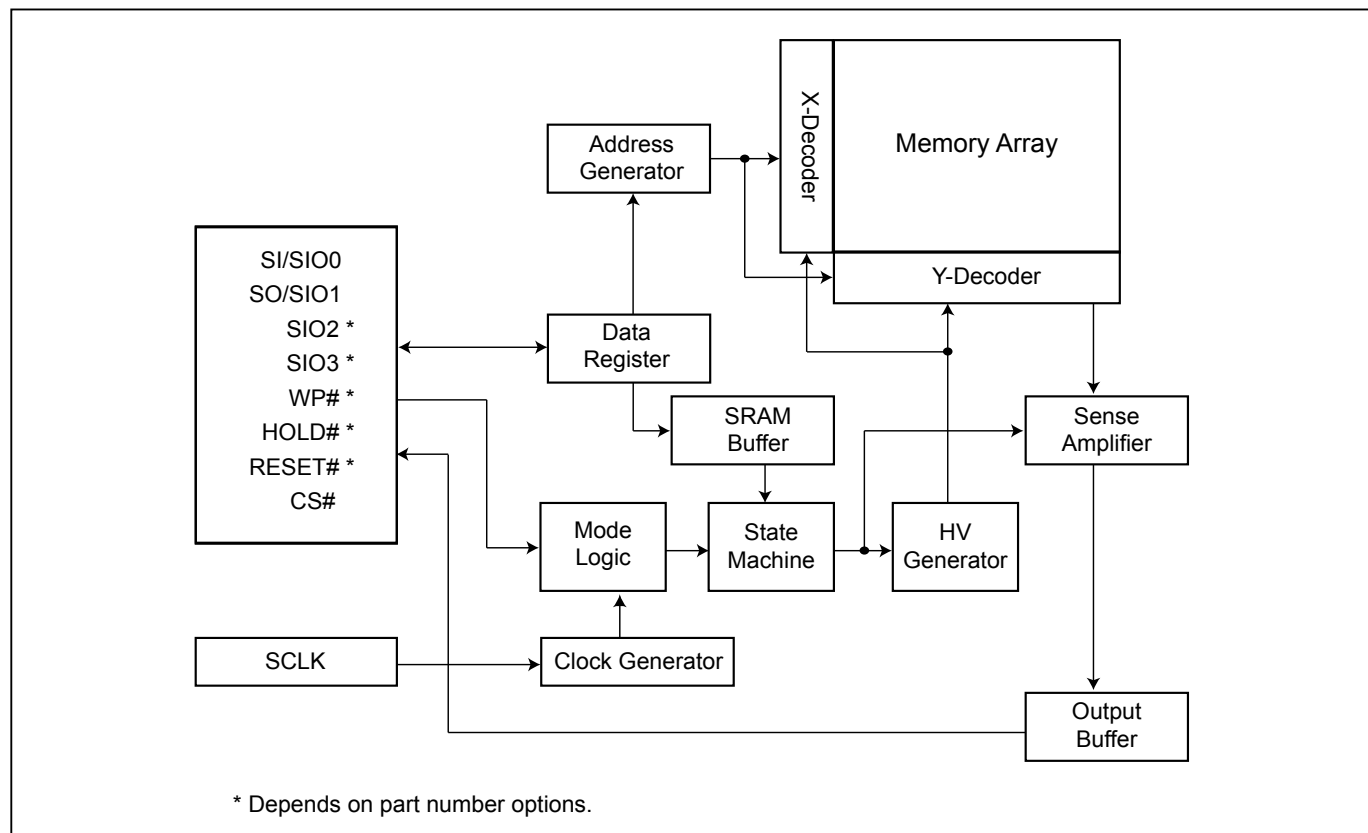

## 6. DATA PROTECTION

During power transition, there may be some false system level signals which result in inadvertent erasure or programming. The device is designed to protect itself from these accidental write cycles.

The state machine will be reset as standby mode automatically during power up. In addition, the control register architecture of the device constrains that the memory contents can only be changed after specific command sequences have completed successfully.

In the following, there are several features to protect the system from the accidental write cycles during VCC power-up and power-down or from system noise.

- Valid command length checking: The command length will be checked whether it is at byte base and completed on byte boundary.
- Write Enable (WREN) command: WREN command is required to set the Write Enable Latch bit (WEL) before other command to change data.
- Deep Power Down Mode: By entering deep power down mode, the flash device also is under protected from writing all commands except Release from deep power down mode command (RDP) and Read Electronic Signature command (RES), and softreset command.
- Advanced Security Features: there are some protection and security features which protect content from inadvertent write and hostile access.

## I. Block lock protection

- The Software Protected Mode (SPM) use (BP3, BP2, BP1, BP0 and T/B) bits to allow part of memory to be protected as read only. The protected area definition is shown as "Table 2. Protected Area Sizes", the protected areas are more flexible which may protect various area by setting value of BP0-BP3 bits.
- The Hardware Protected Mode (HPM) use WP#/SIO2 to protect the (BP3, BP2, BP1, BP0) bits and Status Register Write Protect bit.
- In four I/O and QPI mode, the feature of HPM will be disabled.

**Table 2. Protected Area Sizes**

**Protected Area Sizes (T/B bit = 0)**

| Status bit |     |     |     | Protect Level                                                         |
|------------|-----|-----|-----|-----------------------------------------------------------------------|
| BP3        | BP2 | BP1 | BP0 | 256Mb                                                                 |
| 0          | 0   | 0   | 0   | 0 (none)                                                              |
| 0          | 0   | 0   | 1   | 1 (1 block, protected block 511 <sup>th</sup> )                       |
| 0          | 0   | 1   | 0   | 2 (2 blocks, protected block 510 <sup>th</sup> -511 <sup>th</sup> )   |
| 0          | 0   | 1   | 1   | 3 (4 blocks, protected block 508 <sup>th</sup> -511 <sup>th</sup> )   |
| 0          | 1   | 0   | 0   | 4 (8 blocks, protected block 504 <sup>th</sup> -511 <sup>th</sup> )   |
| 0          | 1   | 0   | 1   | 5 (16 blocks, protected block 496 <sup>th</sup> -511 <sup>th</sup> )  |
| 0          | 1   | 1   | 0   | 6 (32 blocks, protected block 480 <sup>th</sup> -511 <sup>th</sup> )  |
| 0          | 1   | 1   | 1   | 7 (64 blocks, protected block 448 <sup>th</sup> -511 <sup>th</sup> )  |
| 1          | 0   | 0   | 0   | 8 (128 blocks, protected block 384 <sup>th</sup> -511 <sup>th</sup> ) |
| 1          | 0   | 0   | 1   | 9 (256 blocks, protected block 256 <sup>th</sup> -511 <sup>th</sup> ) |
| 1          | 0   | 1   | 0   | 10 (512 blocks, protected all)                                        |
| 1          | 0   | 1   | 1   | 11 (512 blocks, protected all)                                        |
| 1          | 1   | 0   | 0   | 12 (512 blocks, protected all)                                        |
| 1          | 1   | 0   | 1   | 13 (512 blocks, protected all)                                        |
| 1          | 1   | 1   | 0   | 14 (512 blocks, protected all)                                        |
| 1          | 1   | 1   | 1   | 15 (512 blocks, protected all)                                        |

**Protected Area Sizes (T/B bit = 1)**

| Status bit |     |     |     | Protect Level                                                       |
|------------|-----|-----|-----|---------------------------------------------------------------------|
| BP3        | BP2 | BP1 | BP0 | 256Mb                                                               |
| 0          | 0   | 0   | 0   | 0 (none)                                                            |
| 0          | 0   | 0   | 1   | 1 (1 block, protected block 0 <sup>th</sup> )                       |
| 0          | 0   | 1   | 0   | 2 (2 blocks, protected block 0 <sup>th</sup> -1 <sup>st</sup> )     |
| 0          | 0   | 1   | 1   | 3 (4 blocks, protected block 0 <sup>th</sup> -3 <sup>rd</sup> )     |
| 0          | 1   | 0   | 0   | 4 (8 blocks, protected block 0 <sup>th</sup> -7 <sup>th</sup> )     |
| 0          | 1   | 0   | 1   | 5 (16 blocks, protected block 0 <sup>th</sup> -15 <sup>th</sup> )   |
| 0          | 1   | 1   | 0   | 6 (32 blocks, protected block 0 <sup>th</sup> -31 <sup>st</sup> )   |
| 0          | 1   | 1   | 1   | 7 (64 blocks, protected block 0 <sup>th</sup> -63 <sup>rd</sup> )   |
| 1          | 0   | 0   | 0   | 8 (128 blocks, protected block 0 <sup>th</sup> -127 <sup>th</sup> ) |
| 1          | 0   | 0   | 1   | 9 (256 blocks, protected block 0 <sup>th</sup> -255 <sup>th</sup> ) |
| 1          | 0   | 1   | 0   | 10 (512 blocks, protected all)                                      |
| 1          | 0   | 1   | 1   | 11 (512 blocks, protected all)                                      |
| 1          | 1   | 0   | 0   | 12 (512 blocks, protected all)                                      |
| 1          | 1   | 0   | 1   | 13 (512 blocks, protected all)                                      |
| 1          | 1   | 1   | 0   | 14 (512 blocks, protected all)                                      |
| 1          | 1   | 1   | 1   | 15 (512 blocks, protected all)                                      |

**II. Additional 4K-bit secured OTP** for an unique identifier to provide an 4K-bit one-time program area for setting a device unique serial number. This may be accomplished in the factory or by an end systems customer.

- Security register bit 0 indicates whether the secured OTP area is locked by factory or not.
- The 4K-bit secured OTP area is programmed by entering secured OTP mode (with the Enter Security OTP command), and going through a normal program procedure. Exiting secured OTP mode is done by issuing the Exit Security OTP command.
- Customer may lock-down the customer lockable secured OTP by writing WRSCUR(write security register) command to set customer lock-down bit1 as "1". Please refer to ["Table 12. Security Register Definition"](#) for security register bit definition and ["Table 3. 4K-bit Secured OTP Definition"](#) for address range definition.
- Note: Once lock-down whatever by factory or customer, it cannot be changed any more. While in 4K-bit secured OTP mode, array access is not allowed.

**Table 3. 4K-bit Secured OTP Definition**

| Address range | Size     | Standard Factory Lock          | Customer Lock          |
|---------------|----------|--------------------------------|------------------------|
| xxx000-xxx00F | 128-bit  | ESN (electrical serial number) | Determined by customer |
| xxx010-xxx1FF | 3968-bit | N/A                            |                        |

## 7. Memory Organization

**Table 4. Memory Organization**

|                                                           |                 |                 |          |               |          |                                                               |
|-----------------------------------------------------------|-----------------|-----------------|----------|---------------|----------|---------------------------------------------------------------|
|                                                           | Block(64K-byte) | Block(32K-byte) | Sector   | Address Range |          |                                                               |
| <div>individual block<br/>lock/unlock unit:64K-byte</div> | 511             | 1023            | 8191     | 1FFF000h      | 1FFFFFFh | <div>individual 16 sectors<br/>lock/unlock unit:4K-byte</div> |
|                                                           |                 |                 | ⋮        | ⋮             | ⋮        |                                                               |
|                                                           |                 |                 | 8184     | 1FF8000h      | 1FF8FFFh |                                                               |
|                                                           |                 | 1022            | 8183     | 1FF7000h      | 1FF7FFFh |                                                               |
|                                                           |                 |                 | ⋮        | ⋮             | ⋮        |                                                               |
|                                                           |                 |                 | 8176     | 1FF0000h      | 1FF0FFFh |                                                               |
|                                                           | 510             | 1021            | 8175     | 1FEF000h      | 1FEFFFFh |                                                               |
|                                                           |                 |                 | ⋮        | ⋮             | ⋮        |                                                               |
|                                                           |                 |                 | 8168     | 1FE8000h      | 1FE8FFFh |                                                               |
|                                                           |                 | 1020            | 8167     | 1FE7000h      | 1FE7FFFh |                                                               |
|                                                           |                 |                 | ⋮        | ⋮             | ⋮        |                                                               |
|                                                           |                 |                 | 8160     | 1FE0000h      | 1FE0FFFh |                                                               |
|                                                           | 509             | 1019            | 8159     | 1FDF000h      | 1FDFFFFh |                                                               |
|                                                           |                 |                 | ⋮        | ⋮             | ⋮        |                                                               |
|                                                           |                 |                 | 8152     | 1FD8000h      | 1FD8FFFh |                                                               |
|                                                           |                 | 1018            | 8151     | 1FD7000h      | 1FD7FFFh |                                                               |
| ⋮                                                         |                 |                 | ⋮        | ⋮             |          |                                                               |
| 8144                                                      |                 |                 | 1FD0000h | 1FD0FFFh      |          |                                                               |


individual block  
lock/unlock unit:64K-byte

|                                                           |   |   |          |          |          |                                                               |
|-----------------------------------------------------------|---|---|----------|----------|----------|---------------------------------------------------------------|
| <div>individual block<br/>lock/unlock unit:64K-byte</div> | 2 | 5 | 47       | 002F000h | 002FFFFh | <div>individual 16 sectors<br/>lock/unlock unit:4K-byte</div> |
|                                                           |   |   | ⋮        | ⋮        | ⋮        |                                                               |
|                                                           |   |   | 40       | 0028000h | 0028FFFh |                                                               |
|                                                           |   | 4 | 39       | 027000h  | 0027FFFh |                                                               |
|                                                           |   |   | ⋮        | ⋮        | ⋮        |                                                               |
|                                                           |   |   | 32       | 0020000h | 0020FFFh |                                                               |
|                                                           | 1 | 3 | 31       | 001F000h | 001FFFFh |                                                               |
|                                                           |   |   | ⋮        | ⋮        | ⋮        |                                                               |
|                                                           |   |   | 24       | 0018000h | 0018FFFh |                                                               |
|                                                           |   | 2 | 23       | 0017000h | 0017FFFh |                                                               |
|                                                           |   |   | ⋮        | ⋮        | ⋮        |                                                               |
|                                                           |   |   | 16       | 0010000h | 0010FFFh |                                                               |
|                                                           | 0 | 1 | 15       | 000F000h | 000FFFFh |                                                               |
|                                                           |   |   | ⋮        | ⋮        | ⋮        |                                                               |
|                                                           |   |   | 8        | 0008000h | 0008FFFh |                                                               |
|                                                           |   | 0 | 7        | 0007000h | 0007FFFh |                                                               |
| ⋮                                                         |   |   | ⋮        | ⋮        |          |                                                               |
| 0                                                         |   |   | 0000000h | 0000FFFh |          |                                                               |

## 8. DEVICE OPERATION

- Before a command is issued, status register should be checked to ensure device is ready for the intended operation.
- When an incorrect command is written to this device, it enters standby mode and stays in standby mode until the next CS# falling edge. In standby mode, This device's SO pin should be High-Z.
- When a correct command is written to this device, it enters active mode and stays in active mode until the next CS# rising edge.
- Input data is latched on the rising edge of Serial Clock (SCLK) and data shifts out on the falling edge of SCLK. The difference of Serial mode 0 and mode 3 is shown as "[Figure 1. Serial Modes Supported](#)".
- For the following instructions: RDID, RDSR, RDSCUR, READ/READ4B, FAST\_READ/FAST\_READ4B, 2READ/2READ4B, DREAD/DREAD4B, 4READ/4READ4B, QREAD/QREAD4B, RDSFDP, RES, REMS, QPIID, RDDPB, RDSPB, RDLR, RDEAR, RDCR, the shifted-in instruction sequence is followed by a data-out sequence. After any bit of data being shifted out, the CS# can be high. For the following instructions: WREN, WRDI, WRSR, SE/SE4B, BE32K/BE32K4B, BE/BE4B, CE, PP/PP4B, 4PP/4PP4B, DP, ENSO, EXSO, WRSCUR, EN4B, EX4B, WPSEL, GBLK, GBULK, SUSPEND, RESUME, NOP, RSTEN, RST, EQIO, RSTQIO the CS# must go high exactly at the byte boundary; otherwise, the instruction will be rejected and not executed.
- While a Write Status Register, Program, or Erase operation is in progress, access to the memory array is ignored and will not affect the current operation of Write Status Register, Program, or Erase.


**Figure 1. Serial Modes Supported**

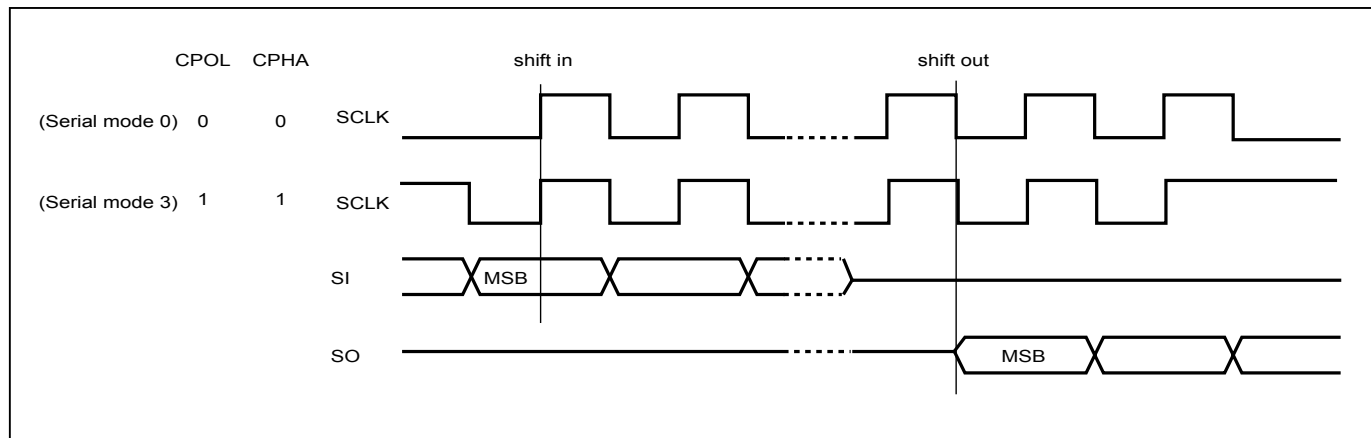


**Note:**

CPOL indicates clock polarity of Serial master, CPOL=1 for SCLK high while idle, CPOL=0 for SCLK low while not transmitting. CPHA indicates clock phase. The combination of CPOL bit and CPHA bit decides which Serial mode is supported.


**Figure 2. Serial Input Timing**

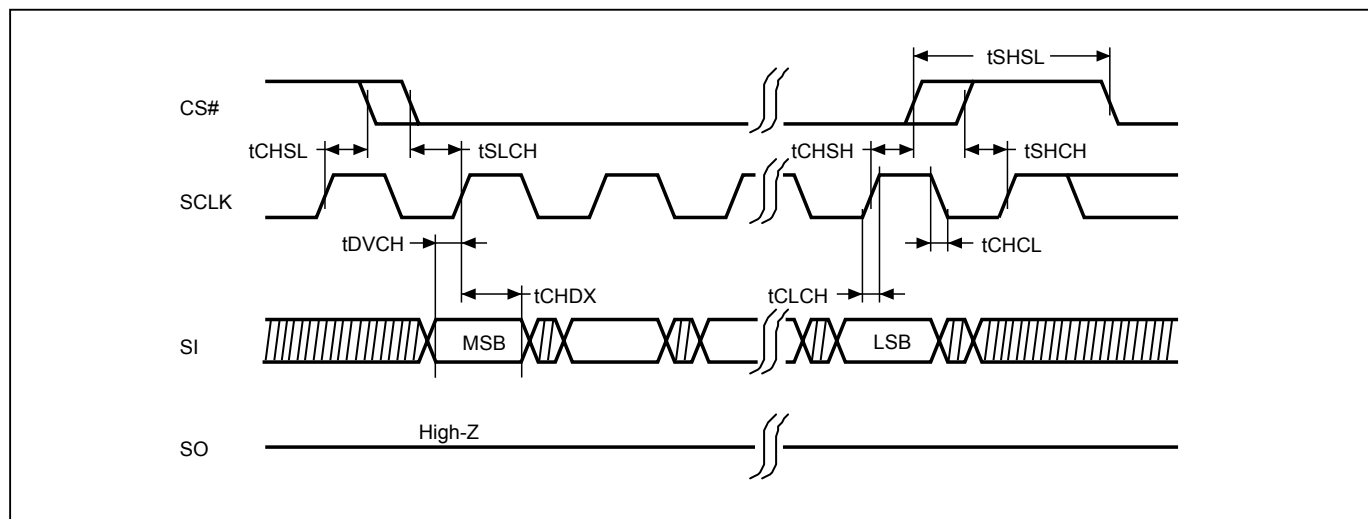


**Figure 3. Serial Input Timing (DTR mode)**

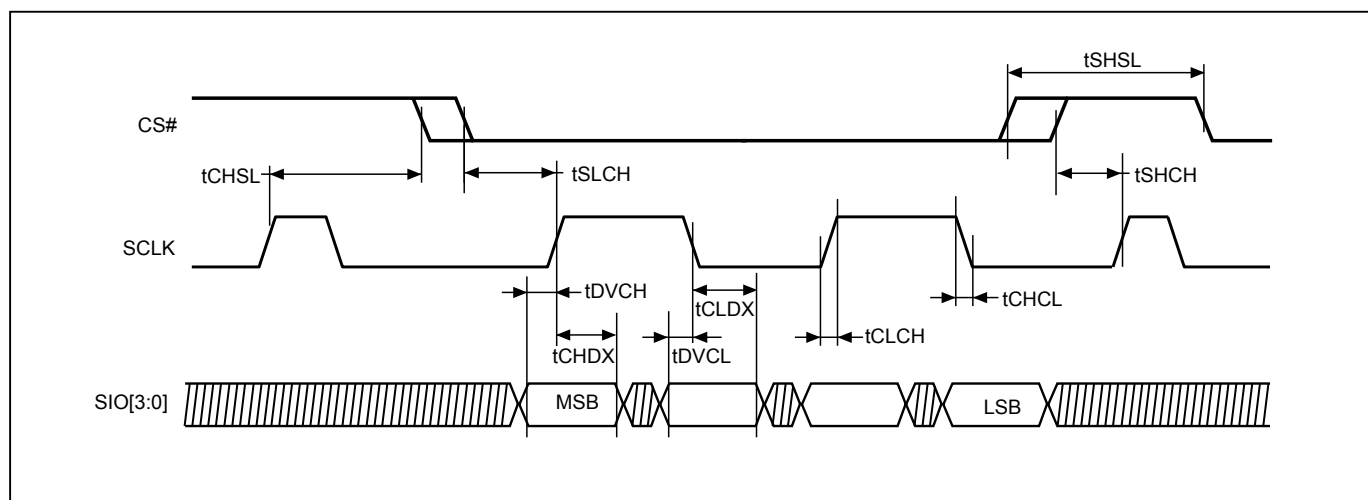

**Figure 4. Output Timing (STR mode)**

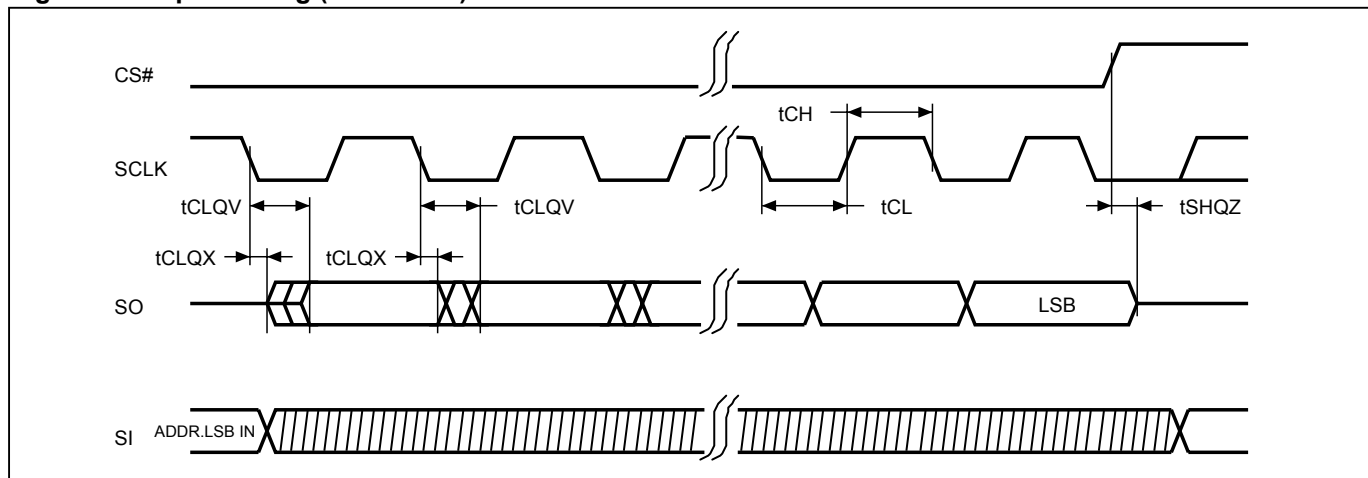

**Figure 5. Output Timing (DTR mode)**

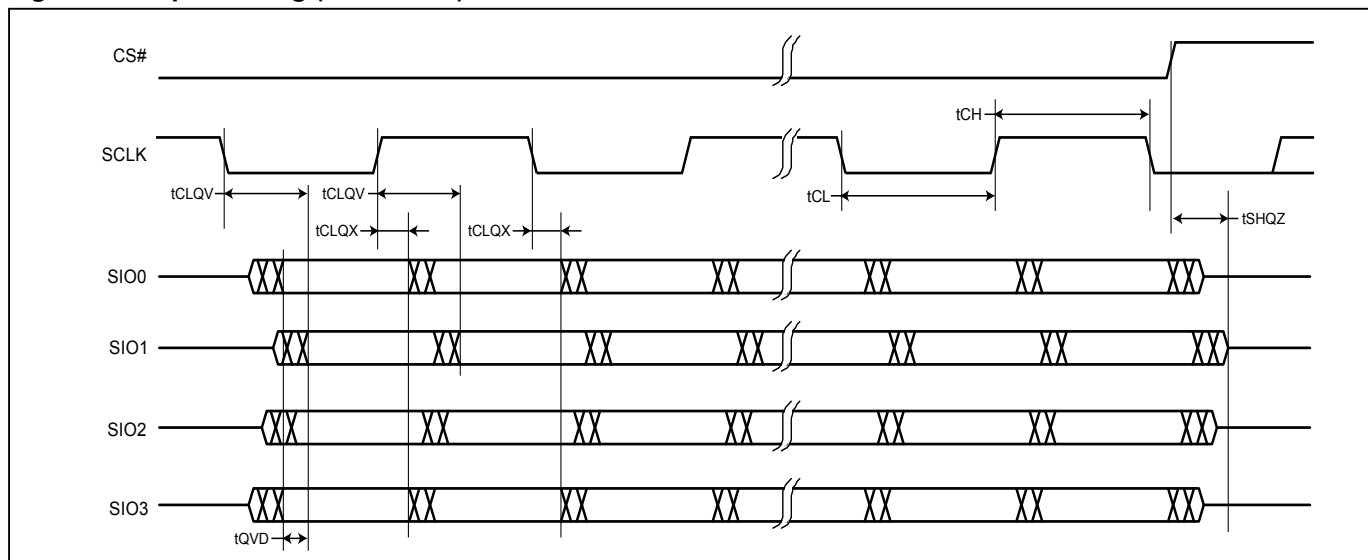

## 8-1. 256Mb Address Protocol

The original 24 bit address protocol of Serial NOR Flash can only access density size below 128Mb. For the memory device of 256Mb and above, the 32bit address is requested for access higher memory size. The MX25L25645G provides three different methods to access the whole 256Mb density:

**(1)Command entry 4-byte address mode:** Issue Enter 4-Byte mode command to set up the 4BYTE bit in Configuration Register bit. After 4BYTE bit has been set, the number of address cycle become 32-bit.

**(2)Extended Address Register (EAR):** configure the memory device into two 128Mb segments to select which one is active through the EAR bit "0".

**(3)4-byte Address Command Set:** When issuing 4-byte address command set, 4-byte address (A31-A0) is requested after the instruction code. Please note that it is not necessary to issue EN4B command before issuing any of 4-byte command set.

### Enter 4-Byte Address Mode

In 4-byte Address mode, all instructions are 32-bits address clock cycles. By using EN4B and EX4B to enable and disable the 4-byte address mode.

When 4-byte address mode is enabled, the EAR<0> becomes "don't care" for all instructions requiring 4-byte address. The EAR function will be disabled when 4-byte mode is enabled.

### Extended Address Register (Configurable)


The device provides an 8-bit volatile register for extended Address Register: it identifies the extended address (A31~A24) above 128Mb density by using original 3-byte address.

### Extended Address Register (EAR)

| Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|-------|-------|-------|-------|-------|-------|-------|-------|
| A31   | A30   | A29   | A28   | A27   | A26   | A25   | A24   |

For the MX25L25645G the A31 to A25 are Don't Care. During EAR, reading these bits will read as 0. The bit 0 is default as "0".

**Figure 6. Top and Bottom 128M bits**

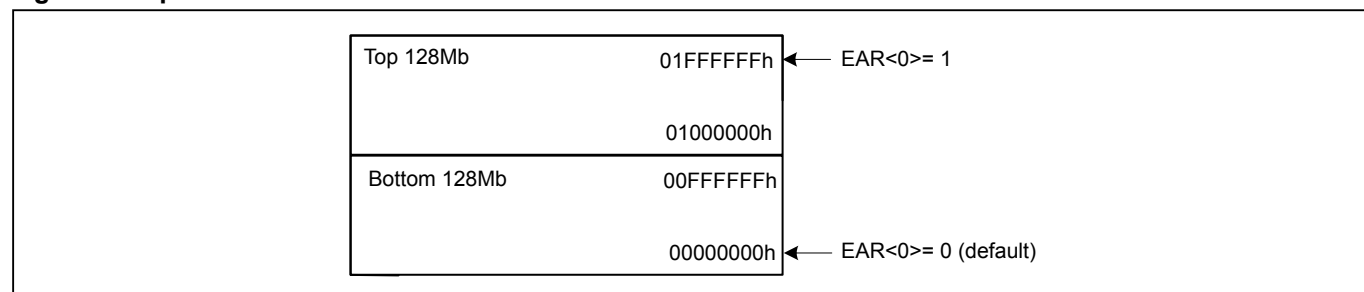

When under EAR mode, Read, Program, Erase operates in the selected segment by using 3-byte address mode.

For the read operation, the whole array data can be continually read out with one command. Data output starts from the selected top or bottom 128Mb, but it can cross the boundary. When the last byte of the segment is reached, the next byte (in a continuous reading) is the first byte of the next segment. However, the EAR (Extended Address Register) value does not change. The random access reading can only be operated in the selected segment.

The Chip erase command will erase the whole chip and is not limited by EAR selected segment.


## 8-2. Quad Peripheral Interface (QPI) Read Mode

QPI protocol enables user to take full advantage of Quad I/O Serial NOR Flash by providing the Quad I/O interface in command cycles, address cycles and as well as data output cycles.

### Enable QPI mode

By issuing EQIO (35h) command, the QPI mode is enabled. After QPI mode is enabled, the device enters quad mode (4-4-4) without QE bit status changed.

**Figure 7. Enable QPI Sequence**

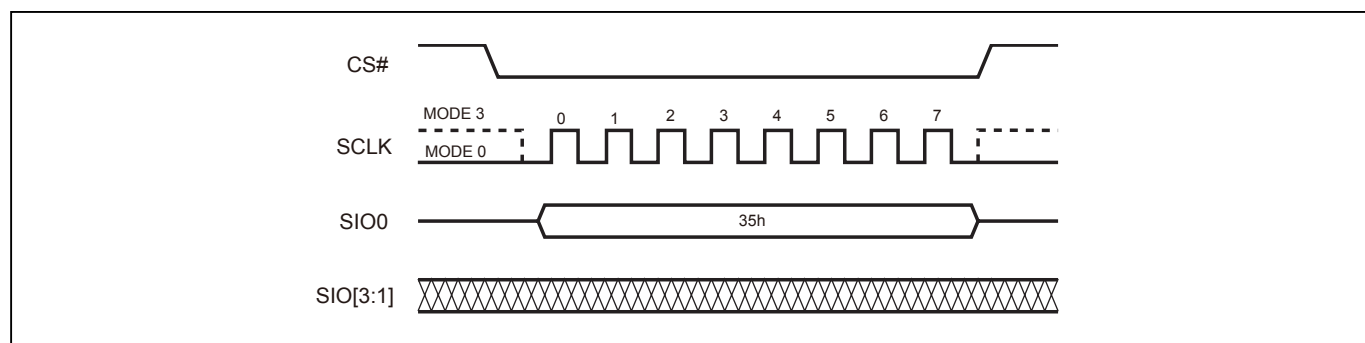


### Reset QPI (RSTQIO)

To reset the QPI mode, the RSTQIO (F5h) command is required. After the RSTQIO command is issued, the device returns from QPI mode (4 I/O interface in command cycles) to SPI mode (1 I/O interface in command cycles).

#### Note:

For EQIO and RSTQIO commands, CS# high width has to follow "From Write/Erase/Program to Read Status Register" tSHSL specification for next instruction, as defined in ["Table 25. AC CHARACTERISTICS \(Temperature = -40°C to 85°C, VCC = 2.7V - 3.6V\)"](#).

**Figure 8. Reset QPI Mode**

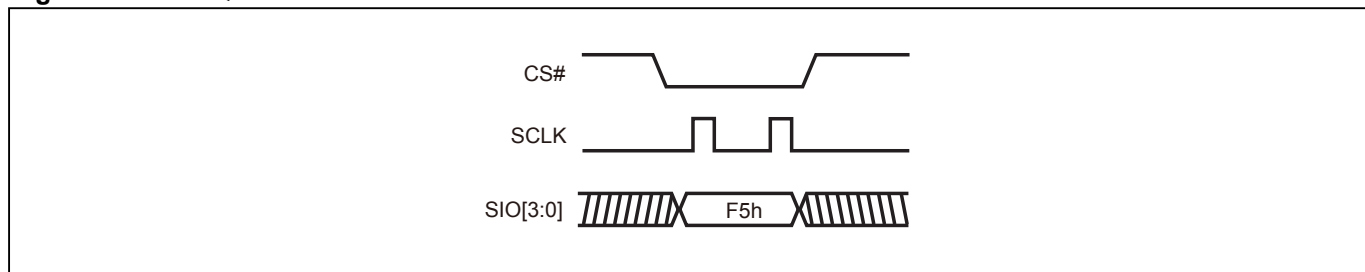

## 9. COMMAND DESCRIPTION

**Table 5. Command Set**

### Read/Write Array Commands

| Command (byte) | READ (normal read)                   | FAST READ (fast read data)           | 2READ (2 x I/O read command)                    | DREAD (1I 2O read)                                  | 4READ (4 x I/O read command)                    | QREAD (1I 4O read)                                  | 4DTRD (Quad I/O DT Read)                                             |
|----------------|--------------------------------------|--------------------------------------|-------------------------------------------------|-----------------------------------------------------|-------------------------------------------------|-----------------------------------------------------|----------------------------------------------------------------------|
| Mode           | SPI                                  | SPI                                  | SPI                                             | SPI                                                 | SPI/QPI                                         | SPI                                                 | SPI/QPI                                                              |
| Address Bytes  | 3/4                                  | 3/4                                  | 3/4                                             | 3/4                                                 | 3/4                                             | 3/4                                                 | 3/4                                                                  |
| 1st byte       | 03 (hex)                             | 0B (hex)                             | BB (hex)                                        | 3B (hex)                                            | EB (hex)                                        | 6B (hex)                                            | ED (hex)                                                             |
| 2nd byte       | ADD1                                 | ADD1                                 | ADD1                                            | ADD1                                                | ADD1                                            | ADD1                                                | ADD1                                                                 |
| 3rd byte       | ADD2                                 | ADD2                                 | ADD2                                            | ADD2                                                | ADD2                                            | ADD2                                                | ADD2                                                                 |
| 4th byte       | ADD3                                 | ADD3                                 | ADD3                                            | ADD3                                                | ADD3                                            | ADD3                                                | ADD3                                                                 |
| 5th byte       |                                      | Dummy*                               | Dummy*                                          | Dummy*                                              | Dummy*                                          | Dummy*                                              | Dummy*                                                               |
| Data Cycles    |                                      |                                      |                                                 |                                                     |                                                 |                                                     |                                                                      |
| Action         | n bytes read out until CS# goes high | n bytes read out until CS# goes high | n bytes read out by 2 x I/O until CS# goes high | n bytes read out by Dual output until CS# goes high | n bytes read out by 4 x I/O until CS# goes high | n bytes read out by Quad output until CS# goes high | n bytes read out (Double Transfer Rate) by 4xI/O until CS# goes high |

| Command (byte) | PP (page program)            | 4PP (quad page program)                 | SE (sector erase)            | BE 32K (block erase 32KB)       | BE (block erase 64KB)       | CE (chip erase)     |
|----------------|------------------------------|-----------------------------------------|------------------------------|---------------------------------|-----------------------------|---------------------|
| Mode           | SPI/QPI                      | SPI                                     | SPI/QPI                      | SPI/QPI                         | SPI/QPI                     | SPI/QPI             |
| Address Bytes  | 3/4                          | 3/4                                     | 3/4                          | 3/4                             | 3/4                         | 0                   |
| 1st byte       | 02 (hex)                     | 38 (hex)                                | 20 (hex)                     | 52 (hex)                        | D8 (hex)                    | 60 or C7 (hex)      |
| 2nd byte       |                              | ADD1                                    | ADD1                         | ADD1                            | ADD1                        |                     |
| 3rd byte       |                              | ADD2                                    | ADD2                         | ADD2                            | ADD2                        |                     |
| 4th byte       |                              | ADD3                                    | ADD3                         | ADD3                            | ADD3                        |                     |
| 5th byte       |                              |                                         |                              |                                 |                             |                     |
| Data Cycles    | 1-256                        | 1-256                                   |                              |                                 |                             |                     |
| Action         | to program the selected page | quad input to program the selected page | to erase the selected sector | to erase the selected 32K block | to erase the selected block | to erase whole chip |

\* Dummy cycle numbers will be different depending on the bit6 & bit 7 (DC0 & DC1) setting in configuration register.

## Read/Write Array Commands (4 Byte Address Command Set)

| Command (byte) | READ4B                           | FAST READ4B                      | 2READ4B                                       | DREAD4B                                           | 4READ4B                                       | QREAD4B                                           |
|----------------|----------------------------------|----------------------------------|-----------------------------------------------|---------------------------------------------------|-----------------------------------------------|---------------------------------------------------|
| Mode           | SPI                              | SPI                              | SPI                                           | SPI                                               | SPI/QPI                                       | SPI                                               |
| Address Bytes  | 4                                | 4                                | 4                                             | 4                                                 | 4                                             | 4                                                 |
| 1st byte       | 13 (hex)                         | 0C (hex)                         | BC (hex)                                      | 3C (hex)                                          | EC (hex)                                      | 6C (hex)                                          |
| 2nd byte       | ADD1                             | ADD1                             | ADD1                                          | ADD1                                              | ADD1                                          | ADD1                                              |
| 3rd byte       | ADD2                             | ADD2                             | ADD2                                          | ADD2                                              | ADD2                                          | ADD2                                              |
| 4th byte       | ADD3                             | ADD3                             | ADD3                                          | ADD3                                              | ADD3                                          | ADD3                                              |
| 5th byte       | ADD4                             | ADD4                             | ADD4                                          | ADD4                                              | ADD4                                          | ADD4                                              |
| 6th byte       |                                  | Dummy                            | Dummy                                         | Dummy                                             | Dummy                                         | Dummy                                             |
| Data Cycles    |                                  |                                  |                                               |                                                   |                                               |                                                   |
| Action         | read data byte by 4 byte address | read data byte by 4 byte address | read data byte by 2 x I/O with 4 byte address | Read data byte by Dual Output with 4 byte address | read data byte by 4 x I/O with 4 byte address | Read data byte by Quad Output with 4 byte address |

| Command (byte) | 4DTRD4B (Quad I/O DT Read)                                           | PP4B                                            | 4PP4B                                                      | BE4B (block erase 64KB)                               | BE32K4B (block erase 32KB)                            | SE4B (Sector erase 4KB)                               |
|----------------|----------------------------------------------------------------------|-------------------------------------------------|------------------------------------------------------------|-------------------------------------------------------|-------------------------------------------------------|-------------------------------------------------------|
| Mode           | SPI/QPI                                                              | SPI/QPI                                         | SPI                                                        | SPI/QPI                                               | SPI/QPI                                               | SPI/QPI                                               |
| Address Bytes  | 3/4                                                                  | 4                                               | 4                                                          | 4                                                     | 4                                                     | 4                                                     |
| 1st byte       | EE (hex)                                                             | 12 (hex)                                        | 3E (hex)                                                   | DC (hex)                                              | 5C (hex)                                              | 21 (hex)                                              |
| 2nd byte       | ADD1                                                                 | ADD1                                            | ADD1                                                       | ADD1                                                  | ADD1                                                  | ADD1                                                  |
| 3rd byte       | ADD2                                                                 | ADD2                                            | ADD2                                                       | ADD2                                                  | ADD2                                                  | ADD2                                                  |
| 4th byte       | ADD3                                                                 | ADD3                                            | ADD3                                                       | ADD3                                                  | ADD3                                                  | ADD3                                                  |
| 5th byte       | ADD4                                                                 | ADD4                                            | ADD4                                                       | ADD4                                                  | ADD4                                                  | ADD4                                                  |
| 6th byte       | Dummy*                                                               |                                                 |                                                            |                                                       |                                                       |                                                       |
| Data Cycles    |                                                                      | 1-256                                           | 1-256                                                      |                                                       |                                                       |                                                       |
| Action         | n bytes read out (Double Transfer Rate) by 4xI/O until CS# goes high | to program the selected page with 4byte address | Quad input to program the selected page with 4byte address | to erase the selected (64KB) block with 4byte address | to erase the selected (32KB) block with 4byte address | to erase the selected (4KB) sector with 4byte address |

## Register/Setting Commands

| Command (byte) | WREN (write enable)                   | WRDI (write disable)                    | FMEN (factory mode enable) | RDSR (read status register)                   | RDCR (read configuration register)                   | WRSR (write status/ configuration register)               | RDEAR (read extended address register) |
|----------------|---------------------------------------|-----------------------------------------|----------------------------|-----------------------------------------------|------------------------------------------------------|-----------------------------------------------------------|----------------------------------------|
| Mode           | SPI/QPI                               | SPI/QPI                                 | SPI/QPI                    | SPI/QPI                                       | SPI/QPI                                              | SPI/QPI                                                   | SPI/QPI                                |
| 1st byte       | 06 (hex)                              | 04 (hex)                                | 41 (hex)                   | 05 (hex)                                      | 15 (hex)                                             | 01 (hex)                                                  | C8 (hex)                               |
| 2nd byte       |                                       |                                         |                            |                                               |                                                      | Values                                                    |                                        |
| 3rd byte       |                                       |                                         |                            |                                               |                                                      | Values                                                    |                                        |
| 4th byte       |                                       |                                         |                            |                                               |                                                      |                                                           |                                        |
| 5th byte       |                                       |                                         |                            |                                               |                                                      |                                                           |                                        |
| Data Cycles    |                                       |                                         |                            |                                               |                                                      | 1-2                                                       |                                        |
| Action         | sets the (WEL) write enable latch bit | resets the (WEL) write enable latch bit | enable factory mode        | to read out the values of the status register | to read out the values of the configuration register | to write new values of the status/ configuration register | read extended address register         |

| Command (byte) | WREAR (write extended address register) | WPSEL (Write Protect Selection)                   | EQIO (Enable QPI)     | RSTQIO (Reset QPI)   | EN4B (enter 4-byte mode)                      | EX4B (exit 4-byte mode)                           | PGM/ERS Suspend (Suspend Program/ Erase) |
|----------------|-----------------------------------------|---------------------------------------------------|-----------------------|----------------------|-----------------------------------------------|---------------------------------------------------|------------------------------------------|
| Mode           | SPI/QPI                                 | SPI                                               | SPI                   | QPI                  | SPI/QPI                                       | SPI/QPI                                           | SPI/QPI                                  |
| 1st byte       | C5 (hex)                                | 68 (hex)                                          | 35 (hex)              | F5 (hex)             | B7 (hex)                                      | E9 (hex)                                          | B0 (hex)                                 |
| 2nd byte       |                                         |                                                   |                       |                      |                                               |                                                   |                                          |
| 3rd byte       |                                         |                                                   |                       |                      |                                               |                                                   |                                          |
| 4th byte       |                                         |                                                   |                       |                      |                                               |                                                   |                                          |
| 5th byte       |                                         |                                                   |                       |                      |                                               |                                                   |                                          |
| Data Cycles    | 1                                       |                                                   |                       |                      |                                               |                                                   |                                          |
| Action         | write extended address register         | to enter and enable individual block protect mode | Entering the QPI mode | Exiting the QPI mode | to enter 4-byte mode and set 4BYTE bit as "1" | to exit 4-byte mode and clear 4BYTE bit to be "0" |                                          |

| Command (byte) | PGM/ERS Resume (Resumes Program/ Erase) | DP (Deep power down)        | RDP (Release from deep power down) | SBL (Set Burst Length) |
|----------------|-----------------------------------------|-----------------------------|------------------------------------|------------------------|
| Mode           | SPI/QPI                                 | SPI/QPI                     | SPI/QPI                            | SPI/QPI                |
| 1st byte       | 30 (hex)                                | B9 (hex)                    | AB (hex)                           | C0 (hex)               |
| 2nd byte       |                                         |                             |                                    |                        |
| 3rd byte       |                                         |                             |                                    |                        |
| 4th byte       |                                         |                             |                                    |                        |
| 5th byte       |                                         |                             |                                    |                        |
| Data Cycles    |                                         |                             |                                    |                        |
| Action         |                                         | enters deep power down mode | release from deep power down mode  | to set Burst length    |

## ID/Security Commands

| Command (byte) | RDID (read identification)                                  | RES (read electronic ID)     | REMS (read electronic manufacturer & device ID)    | QPIID (QPI ID Read) | RDSFDP         | ENSO (enter secured OTP)             | EXSO (exit secured OTP)             |
|----------------|-------------------------------------------------------------|------------------------------|----------------------------------------------------|---------------------|----------------|--------------------------------------|-------------------------------------|
| Mode           | SPI                                                         | SPI/QPI                      | SPI                                                | QPI                 | SPI/QPI        | SPI/QPI                              | SPI/QPI                             |
| Address Bytes  | 0                                                           | 0                            | 0                                                  | 0                   | 3              | 0                                    | 0                                   |
| 1st byte       | 9F (hex)                                                    | AB (hex)                     | 90 (hex)                                           | AF (hex)            | 5A (hex)       | B1 (hex)                             | C1 (hex)                            |
| 2nd byte       |                                                             | x                            | x                                                  |                     | ADD1           |                                      |                                     |
| 3rd byte       |                                                             | x                            | x                                                  |                     | ADD2           |                                      |                                     |
| 4th byte       |                                                             |                              | ADD1                                               |                     | ADD3           |                                      |                                     |
| 5th byte       |                                                             |                              |                                                    |                     | Dummy (8)      |                                      |                                     |
| Action         | outputs JEDEC ID: 1-byte Manufacturer ID & 2-byte Device ID | to read out 1-byte Device ID | output the Manufacturer ID & Device ID<br>(Note 2) | ID in QPI interface | Read SFDP mode | to enter the 4K-bit secured OTP mode | to exit the 4K-bit secured OTP mode |

| Command (byte) | RDSCUR (read security register)    | WRSCUR (write security register)                                    | WRSPB (SPB bit program) | ESSPB (all SPB bit erase) | RDSPB (read SPB status) | GBLK (gang block lock)   | GBULK (gang block unlock) |
|----------------|------------------------------------|---------------------------------------------------------------------|-------------------------|---------------------------|-------------------------|--------------------------|---------------------------|
| Mode           | SPI/QPI                            | SPI/QPI                                                             | SPI                     | SPI                       | SPI                     | SPI                      | SPI                       |
| Address Bytes  | 0                                  | 0                                                                   | 4                       | 0                         | 4                       | 0                        | 0                         |
| 1st byte       | 2B (hex)                           | 2F (hex)                                                            | E3 (hex)                | E4 (hex)                  | E2 (hex)                | 7E (hex)                 | 98 (hex)                  |
| 2nd byte       |                                    |                                                                     | ADD1                    |                           | ADD1                    |                          |                           |
| 3rd byte       |                                    |                                                                     | ADD2                    |                           | ADD2                    |                          |                           |
| 4th byte       |                                    |                                                                     | ADD3                    |                           | ADD3                    |                          |                           |
| 5th byte       |                                    |                                                                     | ADD4                    |                           | ADD4                    |                          |                           |
| Data Cycles    |                                    |                                                                     |                         |                           | 1                       |                          |                           |
| Action         | to read value of security register | to set the lock-down bit as "1" (once lock-down, cannot be updated) |                         |                           |                         | whole chip write protect | whole chip unprotect      |

| Command (byte) | WRLR (write lock register) | RDLR (read lock register) | WRDPB (write DPB register) | RDDPB (read DPB register) |
|----------------|----------------------------|---------------------------|----------------------------|---------------------------|
| Mode           | SPI                        | SPI                       | SPI                        | SPI                       |
| Address Bytes  | 0                          | 0                         | 4                          | 4                         |
| 1st byte       | 2C (hex)                   | 2D (hex)                  | E1 (hex)                   | E0 (hex)                  |
| 2nd byte       |                            |                           | ADD1                       | ADD1                      |
| 3rd byte       |                            |                           | ADD2                       | ADD2                      |
| 4th byte       |                            |                           | ADD3                       | ADD3                      |
| 5th byte       |                            |                           | ADD4                       | ADD4                      |
| Data Cycles    | 2                          | 2                         | 1                          | 1                         |
| Action         |                            |                           |                            |                           |

**Reset Commands**

| Command (byte) | NOP (No Operation) | RSTEN (Reset Enable) | RST (Reset Memory) |
|----------------|--------------------|----------------------|--------------------|
| Mode           | SPI/QPI            | SPI/QPI              | SPI/QPI            |
| 1st byte       | 00 (hex)           | 66 (hex)             | 99 (hex)           |
| 2nd byte       |                    |                      |                    |
| 3rd byte       |                    |                      |                    |
| 4th byte       |                    |                      |                    |
| 5th byte       |                    |                      |                    |
| Action         |                    |                      | (Note 3)           |

Note 1: It is not recommended to adopt any other code not in the command definition table, which will potentially enter the hidden mode.

Note 2: ADD=00H will output the manufacturer ID first and ADD=01H will output device ID first.

Note 3: The RSTEN command must be executed before executing the RST command. If any other command is issued in-between RSTEN and RST, the RST command will be ignored.

Note 4: The number in parentheses after "Dummy" stands for how many clock cycles it has.


## 9-1. Write Enable (WREN)

The Write Enable (WREN) instruction sets the Write Enable Latch (WEL) bit. Instructions like PP/PP4B, 4PP/4PP4B, SE/SE4B, BE32K/BE32K4B, BE/BE4B, CE, and WRSR that are intended to change the device content, should be preceded by the WREN instruction.


The sequence of issuing WREN instruction is: CS# goes low→send WREN instruction code→ CS# goes high.

Both SPI (8 clocks) and QPI (2 clocks) command cycle can be accepted by this instruction. The SIO[3:1] are don't care in SPI mode.

**Figure 9. Write Enable (WREN) Sequence (SPI Mode)**

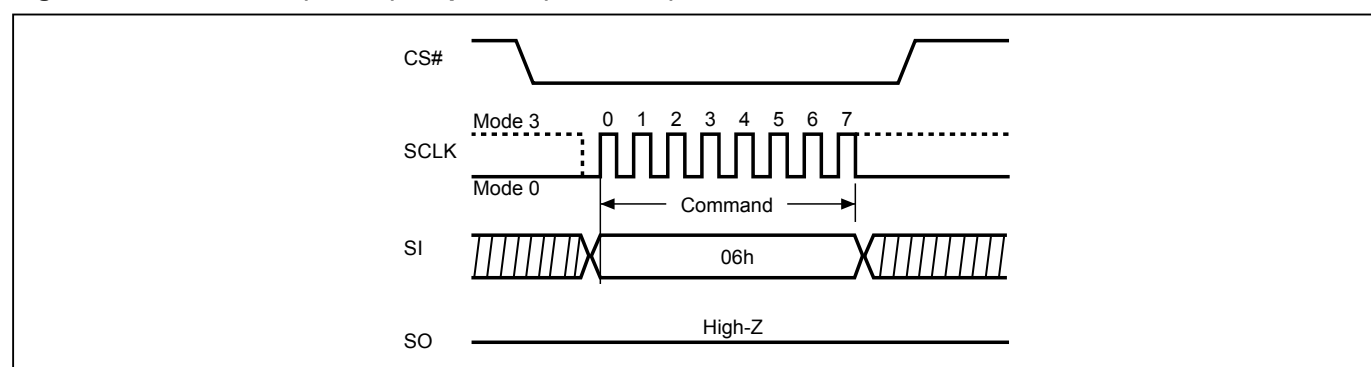

**Figure 10. Write Enable (WREN) Sequence (QPI Mode)**

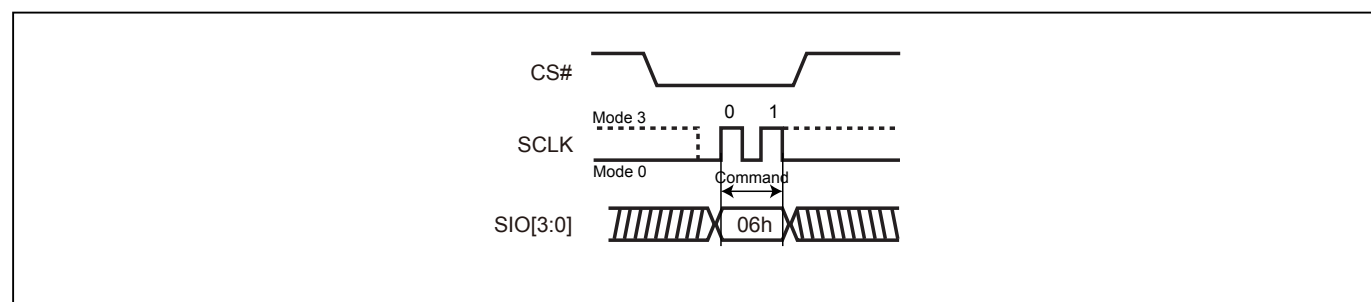

## 9-2. Write Disable (WRDI)

The Write Disable (WRDI) instruction resets the Write Enable Latch (WEL) bit.


The sequence of issuing WRDI instruction is: CS# goes low→send WRDI instruction code→CS# goes high.

Both SPI (8 clocks) and QPI (2 clocks) command cycle can be accepted by this instruction. The SIO[3:1] are don't care in SPI mode.


The WEL bit is reset in the following situations:

- Power-up
- RESET# pin driven low
- WRDI command completion
- WRSR command completion
- PP/PP4B command completion
- 4PP/4PP4B command completion
- SE/SE4B command completion
- BE32K/BE32K4B command completion
- BE/BE4B command completion
- CE command completion
- PGM/ERS Suspend command completion
- Softreset command completion
- WRSCUR command completion
- WPSEL command completion
- GBLK command completion
- GBULK command completion
- WREAR command completion
- WRLR command completion
- WRSPB command completion
- WRDPB command completion
- ESSPB command completion

**Figure 11. Write Disable (WRDI) Sequence (SPI Mode)**

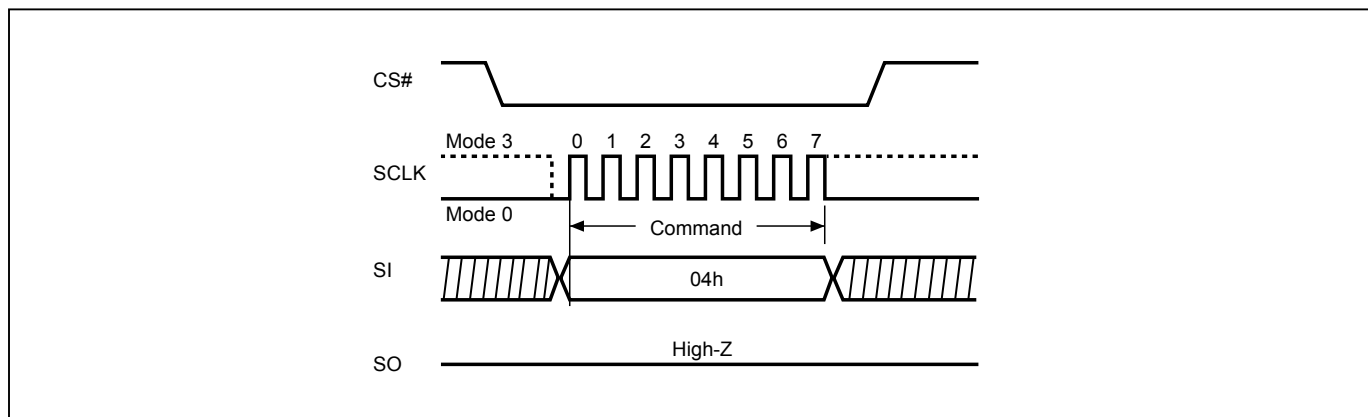

**Figure 12. Write Disable (WRDI) Sequence (QPI Mode)**

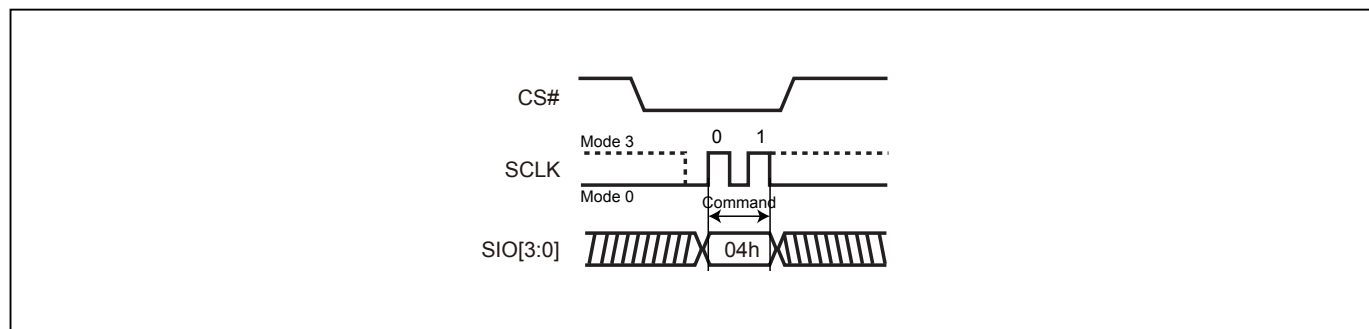

### 9-3. Factory Mode Enable (FMEN)

The Factory Mode Enable (FMEN) instruction enhances Program and Erase performance for increase factory production throughput. The FMEN instruction needs to combine with the instructions which are intended to change the device content, like PP/PP4B, 4PP/4PP4B, SE/SE4B, BE32K/BE32K4B, BE/BE4B, and CE.

The sequence of issuing FMEN instruction is: CS# goes low→send FMEN instruction code→ CS# goes high. A valid factory mode operation needs to be included three sequences: WREN instruction → FMEN instruction→ Program or Erase instruction.


Suspend command is not acceptable under factory mode.

The FMEN is reset by following situations


- Power-up
- Reset# pin driven low
- PP/PP4B command completion
- 4PP/4PP4B command completion
- SE/SE4B command completion
- BE32K/BE32K4B command completion
- BE/BE4B command completion
- CE command completion
- Softreset command completion

Both SPI (8 clocks) and QPI (2 clocks) command cycle can be accepted by this instruction. The SIO[3:1] are don't care in SPI mode.

**Figure 13. Factory Mode Enable (FMEN) Sequence (SPI Mode)**

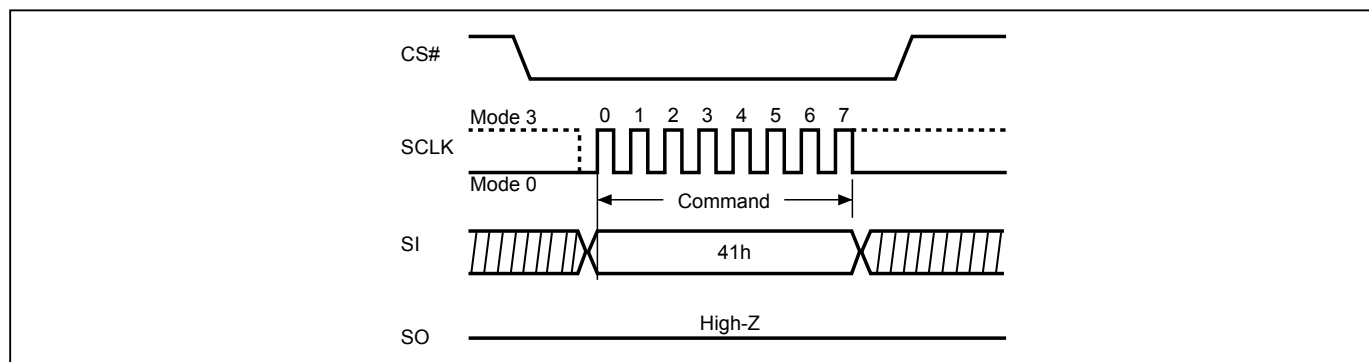

**Figure 14. Factory Mode Enable (FMEN) Sequence (QPI Mode)**

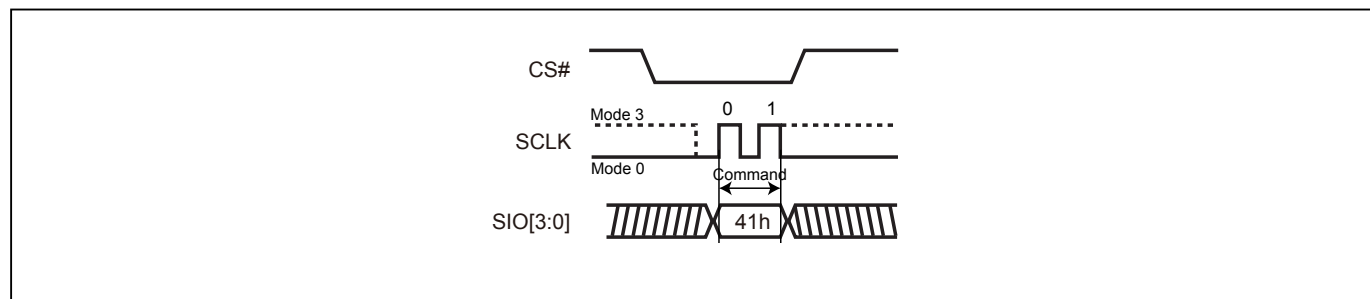


#### 9-4. Read Identification (RDID)

The RDID instruction is for reading the 1-byte manufacturer ID and the 2-byte Device ID that follows. The Macronix Manufacturer ID and Device ID are listed as [Table 6](#) ID Definitions.

The sequence of issuing RDID instruction is: CS# goes low → send RDID instruction code → 24-bits ID data out on SO → to end RDID operation, drive CS# to high at any time during data out.

While Program/Erase operation is in progress, it will not decode the RDID instruction, therefore there's no effect on the cycle of program/erase operation which is currently in progress. When CS# goes high, the device is at standby stage.

**Figure 15. Read Identification (RDID) Sequence (SPI mode only)**

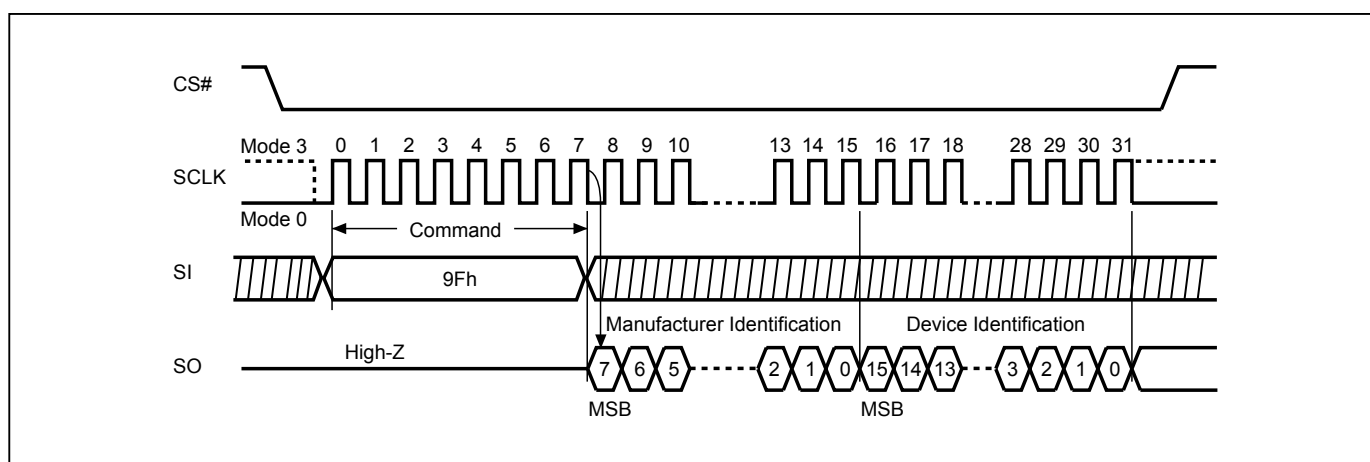

## 9-5. Release from Deep Power-down (RDP), Read Electronic Signature (RES)

The Release from Deep Power-down (RDP) instruction is completed by driving Chip Select (CS#) High. When Chip Select (CS#) is driven High, the device is put in the Stand-by Power mode. If the device was not previously in the Deep Power-down mode, the transition to the Stand-by Power mode is immediate. If the device was previously in the Deep Power-down mode, though, the transition to the Stand-by Power mode is delayed by  $t_{RES1}$ , and Chip Select (CS#) must remain High for at least  $t_{RES1}(\text{max})$ , as specified in "Table 25. AC CHARACTERISTICS (Temperature = -40°C to 85°C, VCC = 2.7V - 3.6V)". Once in the Stand-by Power mode, the device waits to be selected, so that it can receive, decode and execute instructions. The RDP instruction is only for releasing from Deep Power Down Mode. Reset# pin goes low will release the Flash from deep power down mode.


RES instruction is for reading out the old style of 8-bit Electronic Signature, whose values are shown as "Table 6. ID Definitions". This is not the same as RDID instruction. It is not recommended to use for new design. For new design, please use RDID instruction.

The RDP and RES are allowed to execute in Deep power-down mode, except if the device is in progress of program/erase/write cycle; In this case, there is no effect on the current program/erase/write cycle that is in progress.


Both SPI (8 clocks) and QPI (2 clocks) command cycle can be accepted by this instruction. The SIO[3:1] are don't care during SPI mode.

The RES instruction ends when CS# goes high, after the ID been read out at least once. The ID outputs repeatedly if continuously send the additional clock cycles on SCLK while CS# is at low. If the device was not previously in Deep Power-down mode, the device transition to standby mode is immediate. If the device was previously in Deep Power-down mode, there's a delay of  $t_{RES2}$  to transit to standby mode, and CS# must remain to high at least  $t_{RES2}(\text{max})$ . Once in the standby mode, the device waits to be selected, so it can be receive, decode, and execute instruction.


**Figure 16. Read Electronic Signature (RES) Sequence (SPI Mode)**

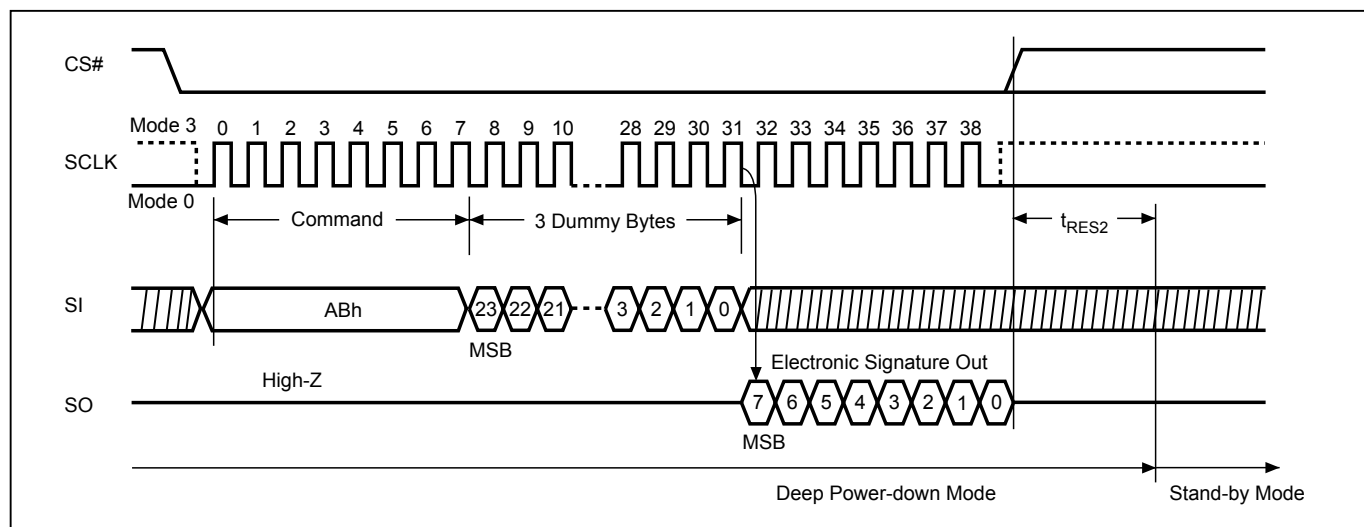


**Figure 17. Read Electronic Signature (RES) Sequence (QPI Mode)**

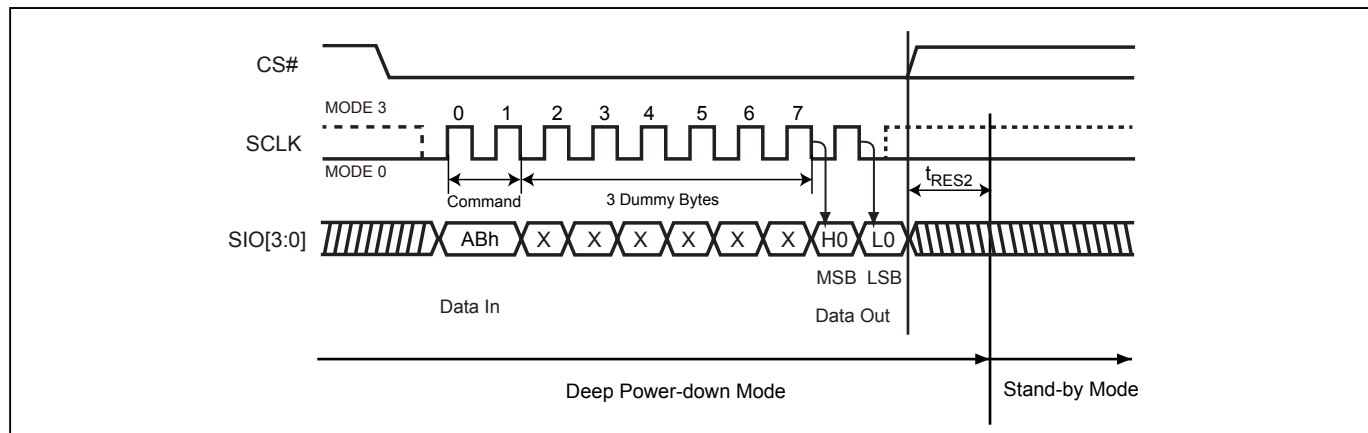

**Figure 18. Release from Deep Power-down (RDP) Sequence (SPI Mode)**

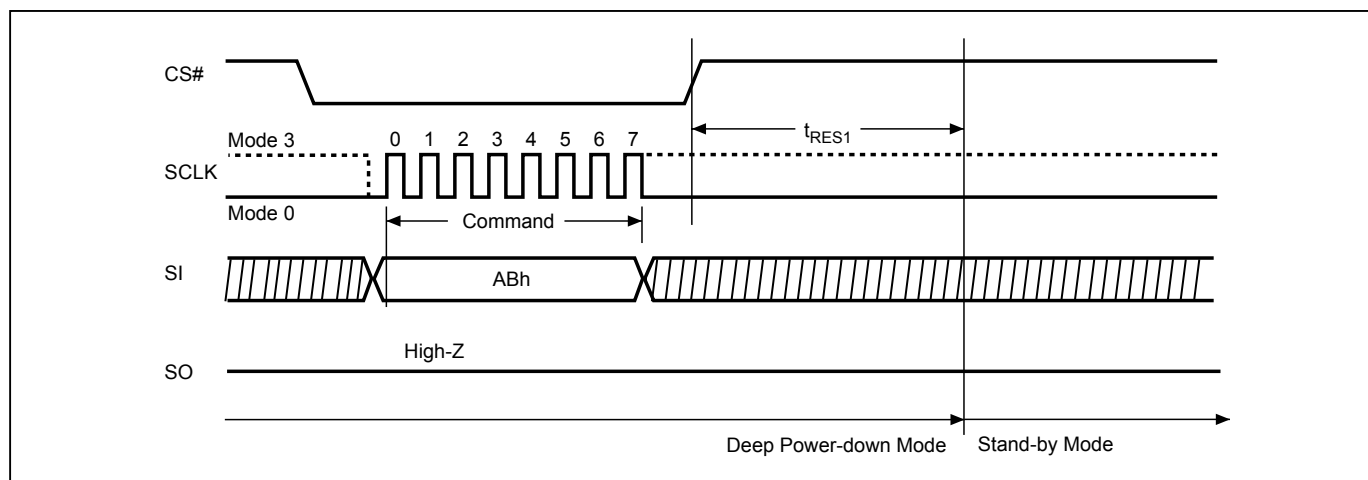

**Figure 19. Release from Deep Power-down (RDP) Sequence (QPI Mode)**

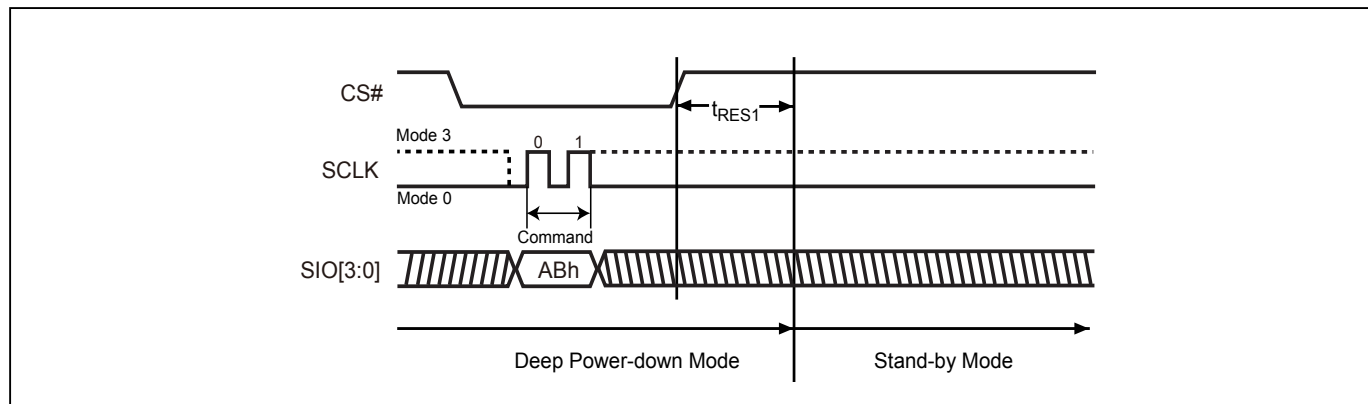


## 9-6. Read Electronic Manufacturer ID & Device ID (REMS)

The REMS instruction returns both the JEDEC assigned manufacturer ID and the device ID. The Device ID values are listed in ["Table 6. ID Definitions"](#).

The REMS instruction is initiated by driving the CS# pin low and sending the instruction code "90h" followed by two dummy bytes and one address byte (A7-A0). After which the manufacturer ID for Macronix (C2h) and the device ID are shifted out on the falling edge of SCLK with the most significant bit (MSB) first. If the address byte is 00h, the manufacturer ID will be output first, followed by the device ID. If the address byte is 01h, then the device ID will be output first, followed by the manufacturer ID. While CS# is low, the manufacturer and device IDs can be read continuously, alternating from one to the other. The instruction is completed by driving CS# high.

**Figure 20. Read Electronic Manufacturer & Device ID (REMS) Sequence (SPI Mode only)**

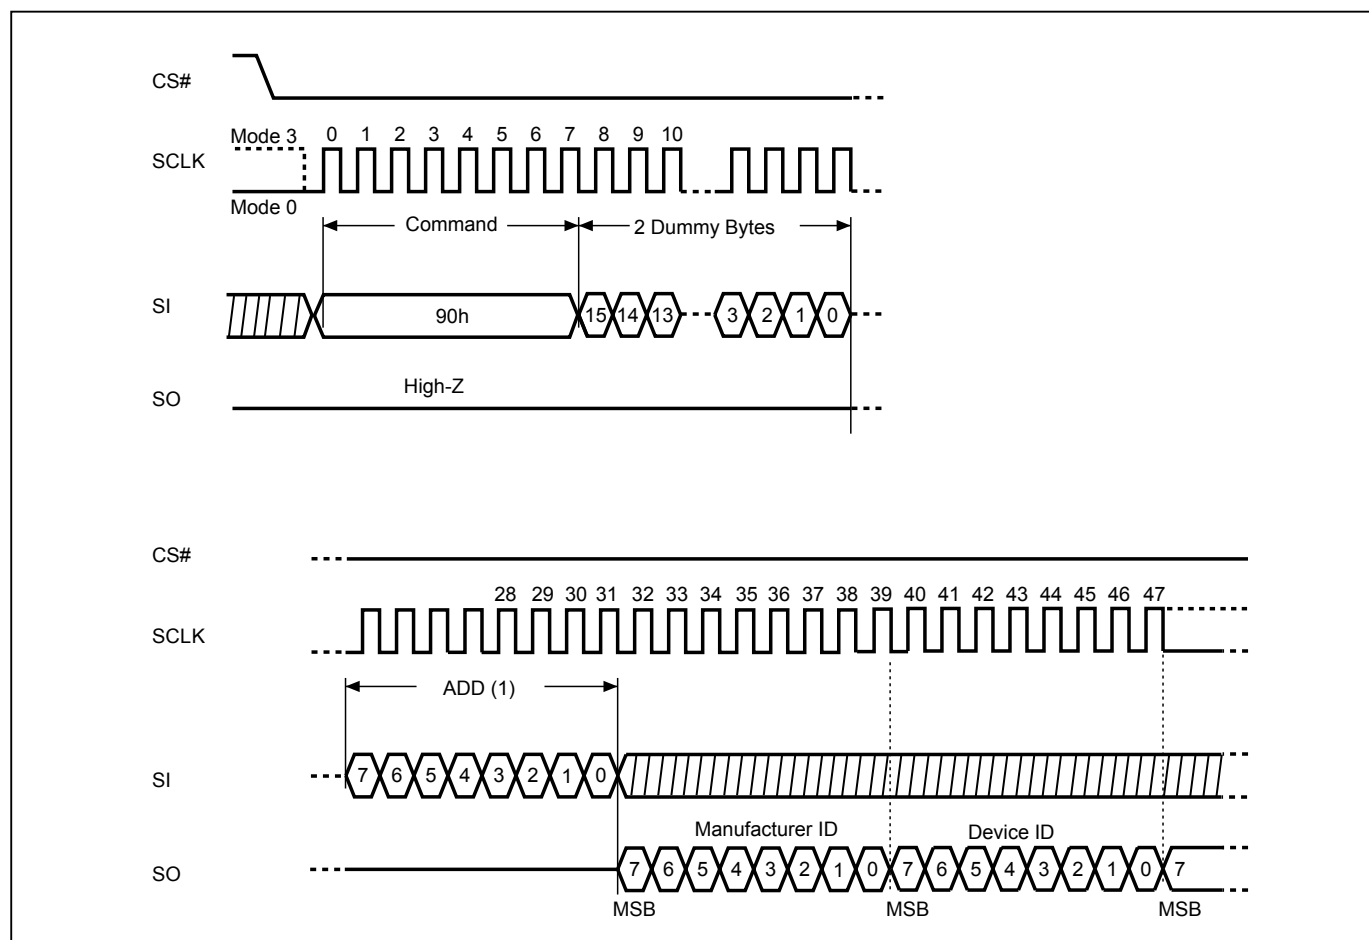

**Notes:** (1) ADD=00H will output the manufacturer's ID first and ADD=01H will output device ID first.

**9-7. QPI ID Read (QPIID)**

The QPIID Read instruction can be used to identify the Device ID and Manufacturer ID. The sequence of issuing the QPIID instruction is as follows: CS# goes low→send QPI ID instruction→Data out on SO→CS# goes high. Most significant bit (MSB) first.

After the command cycle, the device will immediately output data on the falling edge of SCLK. The manufacturer ID, memory type, and device ID data byte will be output continuously, until the CS# goes high.

**Table 6. ID Definitions**

| Command Type |     | MX25L25645G     |             |                |
|--------------|-----|-----------------|-------------|----------------|
| RDID         | 9Fh | Manufacturer ID | Memory Type | Memory Density |
|              |     | C2              | 20          | 19             |
| RES          | ABh | Electronic ID   |             |                |
|              |     | 18              |             |                |
| REMS         | 90h | Manufacturer ID | Device ID   |                |
|              |     | C2              | 18          |                |
| QPIID        | AFh | Manufacturer ID | Memory Type | Memory Density |
|              |     | C2              | 20          | 19             |


## 9-8. Read Status Register (RDSR)

The RDSR instruction is for reading Status Register Bits. The Read Status Register can be read at any time (even in program/erase/write status register condition). It is recommended to check the Write in Progress (WIP) bit before sending a new instruction when a program, erase, or write status register operation is in progress.


The sequence of issuing RDSR instruction is: CS# goes low→ send RDSR instruction code→ Status Register data out on SO.

Both SPI (8 clocks) and QPI (2 clocks) command cycle can be accepted by this instruction. The SIO[3:1] are don't care during SPI mode.

**Figure 21. Read Status Register (RDSR) Sequence (SPI Mode)**

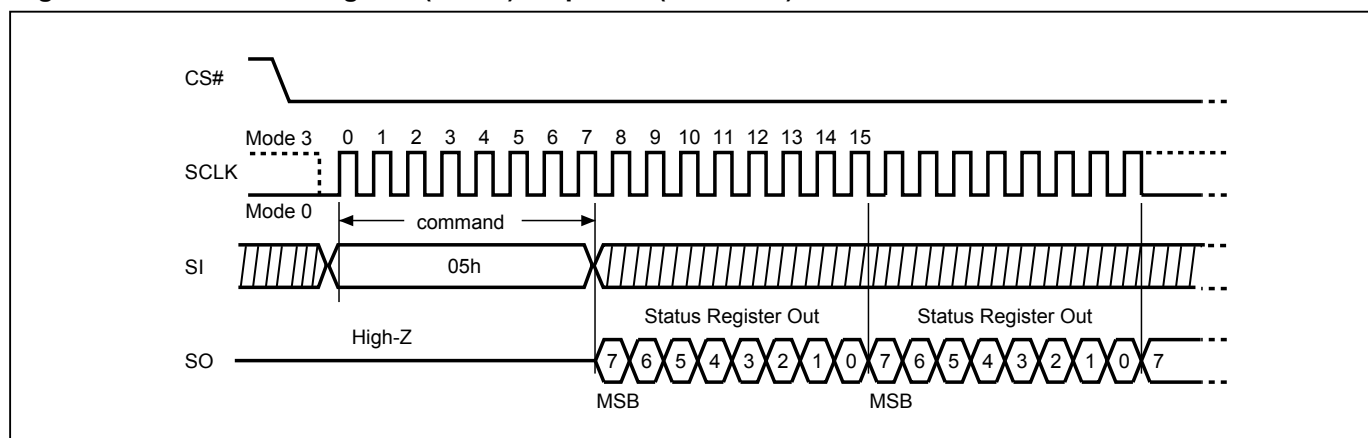

**Figure 22. Read Status Register (RDSR) Sequence (QPI Mode)**

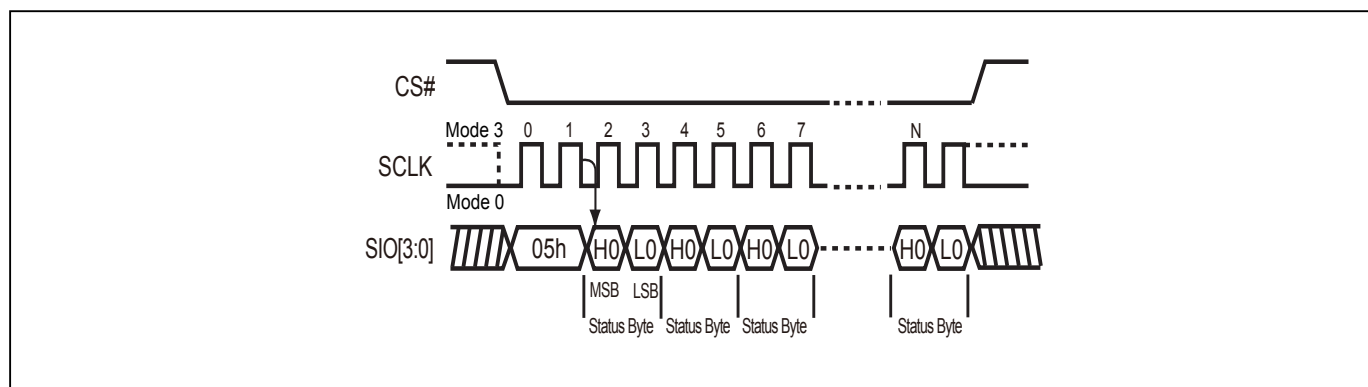


## 9-9. Read Configuration Register (RDCR)

The RDCR instruction is for reading Configuration Register Bits. The Read Configuration Register can be read at any time (even in program/erase/write configuration register condition). It is recommended to check the Write in Progress (WIP) bit before sending a new instruction when a program, erase, or write configuration register operation is in progress.


The sequence of issuing RDCR instruction is: CS# goes low→ send RDCR instruction code→ Configuration Register data out on SO.

Both SPI (8 clocks) and QPI (2 clocks) command cycle can be accepted by this instruction. The SIO[3:1] are don't care during SPI mode.

**Figure 23. Read Configuration Register (RDCR) Sequence (SPI Mode)**

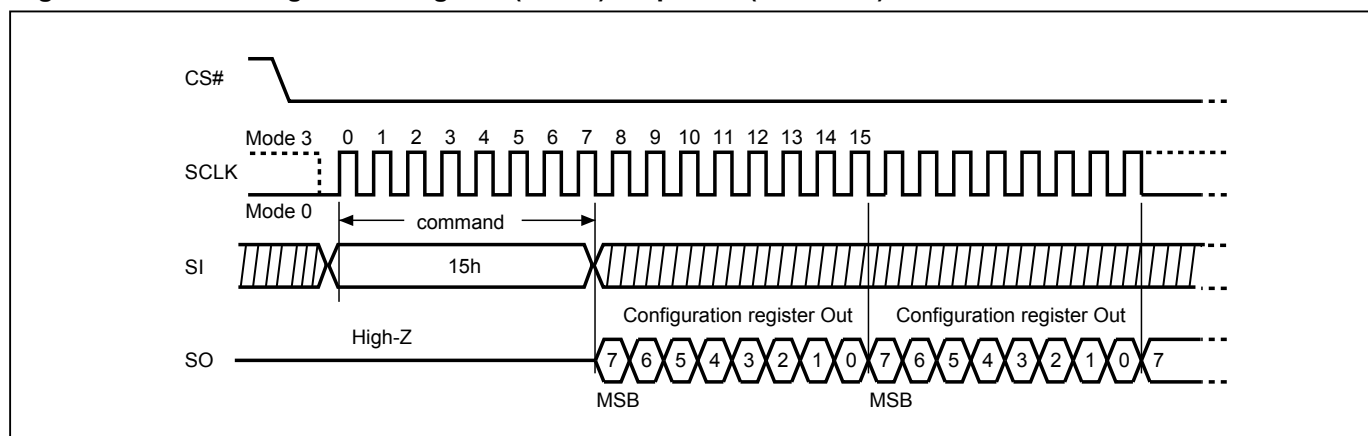

**Figure 24. Read Configuration Register (RDCR) Sequence (QPI Mode)**

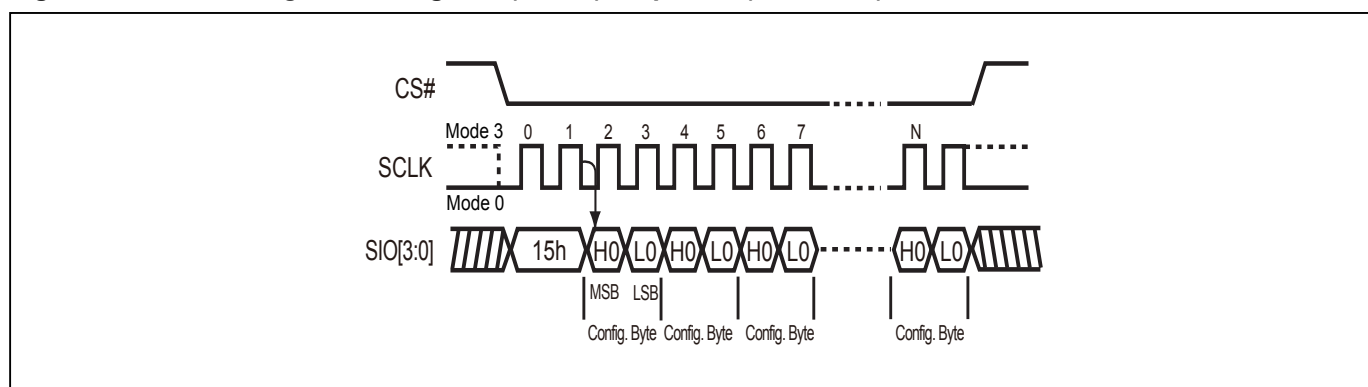

For user to check if Program/Erase operation is finished or not, RDSR instruction flow are shown as follows:

**Figure 25. Program/Erase flow with read array data**


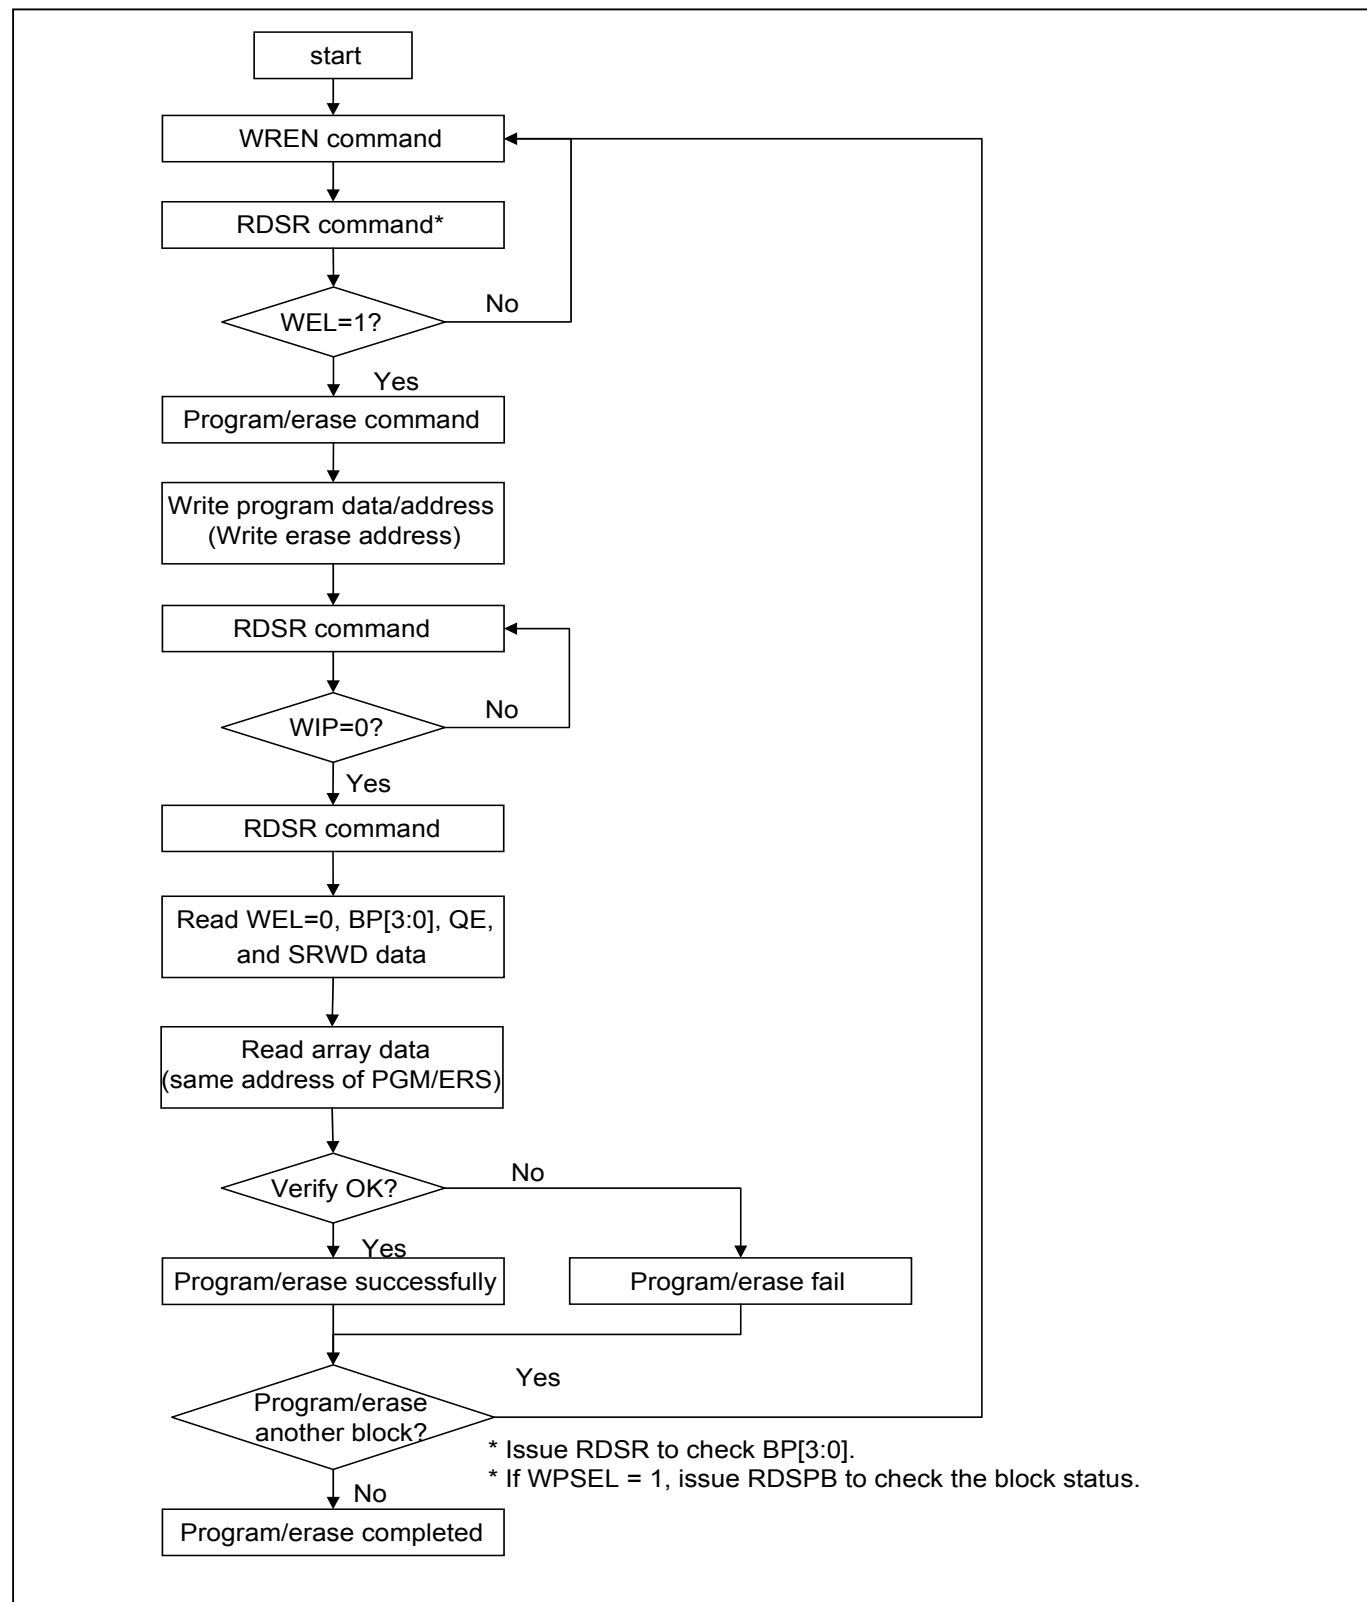


Figure 26. Program/Erase flow without read array data (read P\_FAIL/E\_FAIL flag)

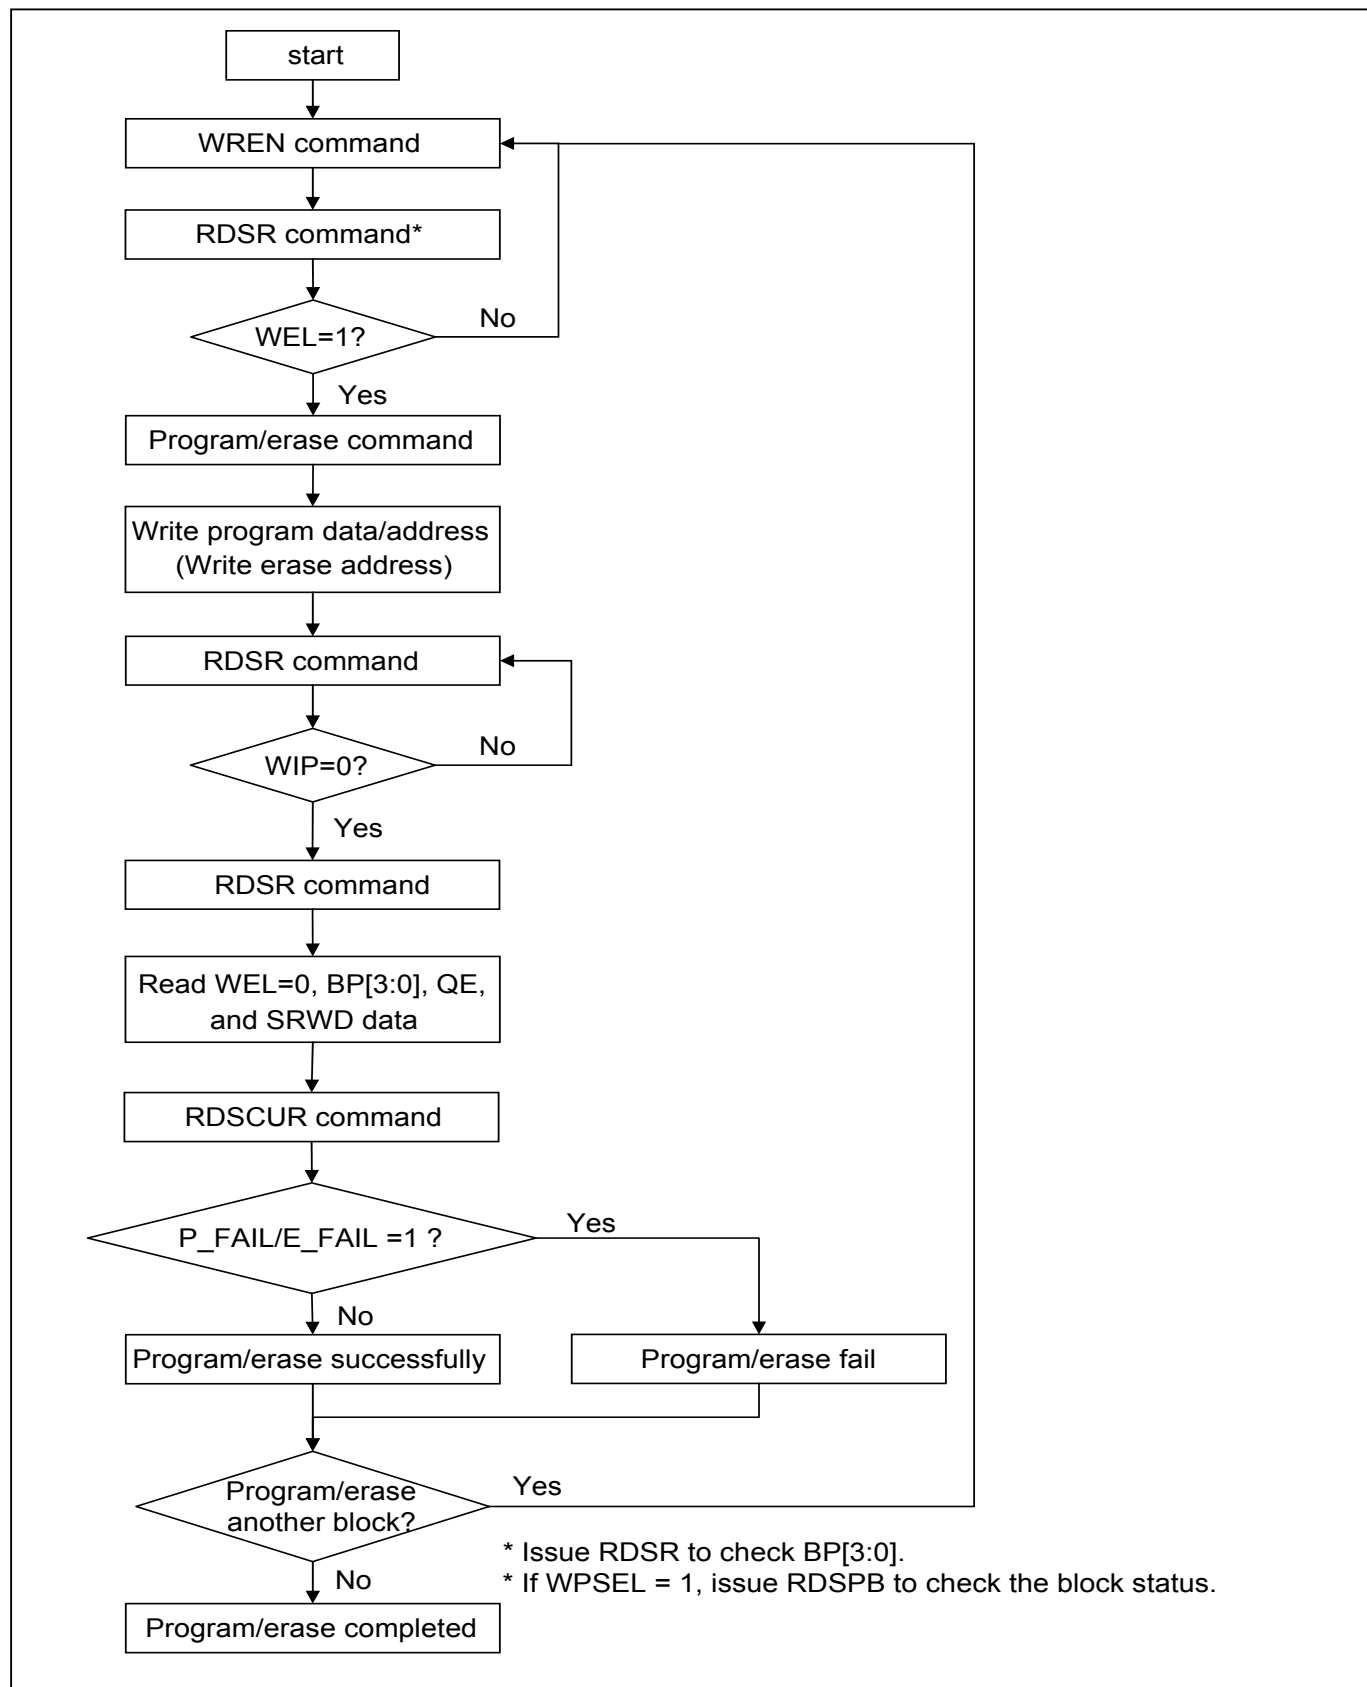

## Status Register

The definition of the status register bits is as below:

**WIP bit.** The Write in Progress (WIP) bit, a volatile bit, indicates whether the device is busy in program/erase/write status register progress. When WIP bit sets to 1, which means the device is busy in program/erase/write status register progress. When WIP bit sets to 0, which means the device is not in progress of program/erase/write status register cycle.

**WEL bit.** The Write Enable Latch (WEL) bit is a volatile bit that is set to "1" by the WREN instruction. WEL needs to be set to "1" before the device can accept program and erase instructions, otherwise the program and erase instructions are ignored. WEL automatically clears to "0" when a program or erase operation completes. To ensure that both WIP and WEL are "0" and the device is ready for the next program or erase operation, it is recommended that WIP be confirmed to be "0" before checking that WEL is also "0" (Please refer to ["Figure 29. WRSR flow"](#)). If a program or erase instruction is applied to a protected memory area, the instruction will be ignored and WEL will clear to "0".

**BP3, BP2, BP1, BP0 bits.** The Block Protect (BP3, BP2, BP1, BP0) bits, non-volatile bits, indicate the protected area (as defined in ["Table 2. Protected Area Sizes"](#)) of the device to against the program/erase instruction without hardware protection mode being set. To write the Block Protect (BP3, BP2, BP1, BP0) bits requires the Write Status Register (WRSR) instruction to be executed. Those bits define the protected area of the memory to against Page Program (PP), Sector Erase (SE), Block Erase 32KB (BE32K), Block Erase (BE) and Chip Erase (CE) instructions (only if Block Protect bits (BP3:BP0) set to 0, the CE instruction can be executed). The BP3, BP2, BP1, BP0 bits are "0" as default. Which is unprotected.

**QE bit.** The Quad Enable (QE) bit is a non-volatile bit with a factory default of "0". When QE is "0", Quad mode commands are ignored; pins WP#/SIO2, RESET#/SIO3 (of 8-pin package) and NC/SIO3 function as WP#, RESET# and NC, respectively. When QE is "1", Quad mode is enabled and Quad mode commands are supported along with Single and Dual mode commands. Pins WP#/SIO2, RESET#/SIO3 (of 8-pin package) and NC/SIO3 function as SIO2 and SIO3, respectively, and their alternate pin functions are disabled. Enabling Quad mode also disables the HPM and RESET features.

**SRWD bit.** The Status Register Write Disable (SRWD) bit, non-volatile bit, is operated together with Write Protection (WP#/SIO2) pin for providing hardware protection mode. The hardware protection mode requires SRWD sets to 1 and WP#/SIO2 pin signal is low stage. In the hardware protection mode, the Write Status Register (WRSR) instruction is no longer accepted for execution and the SRWD bit and Block Protect bits (BP3, BP2, BP1, BP0) are read only. The SRWD bit defaults to be "0".

**Table 7. Status Register**

| bit7                                                                | bit6                                 | bit5                           | bit4                           | bit3                           | bit2                           | bit1                                   | bit0                                          |
|---------------------------------------------------------------------|--------------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|----------------------------------------|-----------------------------------------------|
| SRWD (status register write protect)                                | QE (Quad Enable)                     | BP3 (level of protected block) | BP2 (level of protected block) | BP1 (level of protected block) | BP0 (level of protected block) | WEL (write enable latch)               | WIP (write in progress bit)                   |
| 1=status register write disabled<br>0=status register write enabled | 1=Quad Enabled<br>0=not Quad Enabled | (note 1)                       | (note 1)                       | (note 1)                       | (note 1)                       | 1=write enabled<br>0=not write enabled | 1=write operation<br>0=not in write operation |
| Non-volatile bit                                                    | Non-volatile bit                     | Non-volatile bit               | Non-volatile bit               | Non-volatile bit               | Non-volatile bit               | volatile bit                           | volatile bit                                  |

Note 1: Please refer to the ["Table 2. Protected Area Sizes"](#).

## Configuration Register

The Configuration Register is able to change the default status of Flash memory. Flash memory will be configured after the CR bit is set.

### ODS bit

The output driver strength (ODS1, ODS0) bits are volatile bits, which indicate the output driver level (as defined in ["Table 9. Output Driver Strength Table"](#)) of the device. The Output Driver Strength is defaulted as 30 Ohms when delivered from factory. To write the ODS bits requires the Write Status Register (WRSR) instruction to be executed.

### TB bit

The Top/Bottom (TB) bit is a non-volatile OTP bit. The Top/Bottom (TB) bit is used to configure the Block Protect area by BP bit (BP3, BP2, BP1, BP0), starting from TOP or Bottom of the memory array. The TB bit is defaulted as "0", which means Top area protect. When it is set as "1", the protect area will change to Bottom area of the memory device. To write the TB bits requires the Write Status Register (WRSR) instruction to be executed.

### PBE bit

The Preamble Bit Enable (PBE) bit is a volatile bit. It is used to enable or disable the preamble bit data pattern output on dummy cycles. The PBE bit is defaulted as "0", which means preamble bit is disabled. When it is set as "1", the preamble bit will be enabled, and inputted into dummy cycles. To write the PBE bits requires the Write Status Register (WRSR) instruction to be executed.

### 4BYTE Indicator bit

By writing EN4B instruction, the 4BYTE bit may be set as "1" to access the address length of 32-bit for memory area of higher density (large than 128Mb). The default state is "0" as the 24-bit address mode. The 4BYTE bit may be cleared by power-off or writing EX4B instruction to reset the state to be "0".

**Table 8. Configuration Register**

| bit7                      | bit6                      | bit5                                                                      | bit4                            | bit3                                                             | bit2     | bit1                                 | bit0                                 |
|---------------------------|---------------------------|---------------------------------------------------------------------------|---------------------------------|------------------------------------------------------------------|----------|--------------------------------------|--------------------------------------|
| DC1<br>(Dummy<br>cycle 1) | DC0<br>(Dummy<br>cycle 0) | 4 BYTE                                                                    | PBE<br>(Preamble bit<br>Enable) | TB<br>(top/bottom<br>selected)                                   | Reserved | ODS 1<br>(output driver<br>strength) | ODS 0<br>(output driver<br>strength) |
| (Note 2)                  | (Note 2)                  | 0=3-byte<br>address<br>mode<br>1=4-byte<br>address<br>mode<br>(Default=0) | 0=Disable<br>1=Enable           | 0=Top area<br>protect<br>1=Bottom<br>area protect<br>(Default=0) | x        | (Note 1)                             | (Note 1)                             |
| volatile bit              | volatile bit              | volatile bit                                                              | volatile bit                    | OTP                                                              | x        | volatile bit                         | volatile bit                         |

Note 1: Please refer to ["Table 9. Output Driver Strength Table"](#)

Note 2: Please refer to ["Table 10. Dummy Cycle and Frequency Table \(MHz\)"](#)

**Table 9. Output Driver Strength Table**

| ODS1 | ODS0 | Resistance (Ohm)  | Note               |
|------|------|-------------------|--------------------|
| 0    | 0    | 30 Ohms (Default) | Impedance at VCC/2 |
| 0    | 1    | 45 Ohms           |                    |
| 1    | 0    | 90 Ohms           |                    |
| 1    | 1    | 15 Ohms           |                    |

**Table 10. Dummy Cycle and Frequency Table (MHz)**  
(STR Mode)

| DC[1:0]      | Numbers of Dummy clock cycles | Fast Read | Dual Output Fast Read | Quad Output Fast Read |
|--------------|-------------------------------|-----------|-----------------------|-----------------------|
| 00 (default) | 8                             | 120/133R  | 120/133R              | 120/133R              |
| 01           | 8                             | 120/133R  | 120/133R              | 120/133R              |
| 10           | 8                             | 120/133R  | 120/133R              | 120/133R              |
| 11           | 8                             | 120/133R  | 120/133R              | 120/133R              |

| DC[1:0]      | Numbers of Dummy clock cycles | Dual IO Fast Read |
|--------------|-------------------------------|-------------------|
| 00 (default) | 4                             | 80                |
| 01           | 8                             | 120/133R          |
| 10           | 4                             | 80                |
| 11           | 8                             | 120/133R          |

| DC[1:0]      | Numbers of Dummy clock cycles | Quad IO Fast Read |
|--------------|-------------------------------|-------------------|
| 00 (default) | 6                             | 80                |
| 01           | 4                             | 54                |
| 10           | 8                             | 84/104R           |
| 11           | 10                            | 120/133R          |

(DTR Mode)

| DC[1:0]      | Numbers of Dummy clock cycles | Quad IO DTR Read |
|--------------|-------------------------------|------------------|
| 00 (default) | 6                             | 54               |
| 01           | 6                             | 54               |
| 10           | 8                             | 70/80R           |
| 11           | 10                            | 84/100R          |

**Note:** "R" mean VCC range= 3.0V-3.6V.


## 9-10. Write Status Register (WRSR)

The WRSR instruction is for changing the values of Status Register Bits and Configuration Register Bits. Before sending WRSR instruction, the Write Enable (WREN) instruction must be decoded and executed to set the Write Enable Latch (WEL) bit in advance. The WRSR instruction can change the value of Block Protect (BP3, BP2, BP1, BP0) bits to define the protected area of memory (as shown in "Table 2. Protected Area Sizes"). The WRSR also can set or reset the Quad enable (QE) bit and set or reset the Status Register Write Disable (SRWD) bit in accordance with Write Protection (WP#/SIO2) pin signal, but has no effect on bit1(WEL) and bit0 (WIP) of the status register. The WRSR instruction cannot be executed once the Hardware Protected Mode (HPM) is entered.

The sequence of issuing WRSR instruction is: CS# goes low→ send WRSR instruction code→ Status Register data on SI→Configuration Register data on SI→CS# goes high.


The CS# must go high exactly at the 8 bits or 16 bits data boundary; otherwise, the instruction will be rejected and not executed. The self-timed Write Status Register cycle time (tW) is initiated as soon as Chip Select (CS#) goes high. The Write in Progress (WIP) bit still can be check out during the Write Status Register cycle is in progress. The WIP sets 1 during the tW timing, and sets 0 when Write Status Register Cycle is completed, and the Write Enable Latch (WEL) bit is reset.

**Figure 27. Write Status Register (WRSR) Sequence (SPI Mode)**

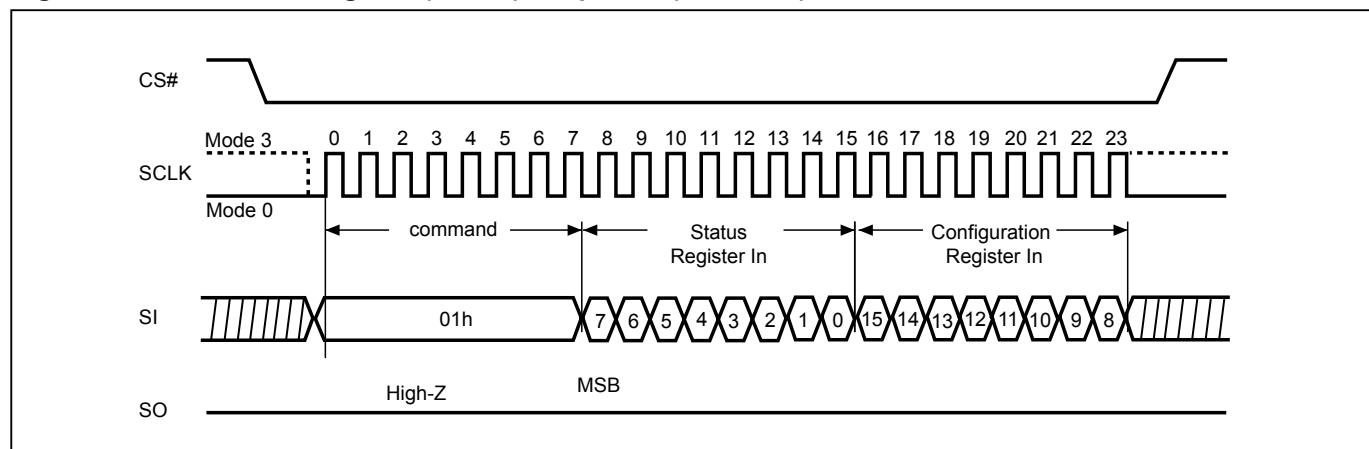

**Note:** The CS# must go high exactly at 8 bits or 16 bits data boundary to completed the write register command.

**Figure 28. Write Status Register (WRSR) Sequence (QPI Mode)**

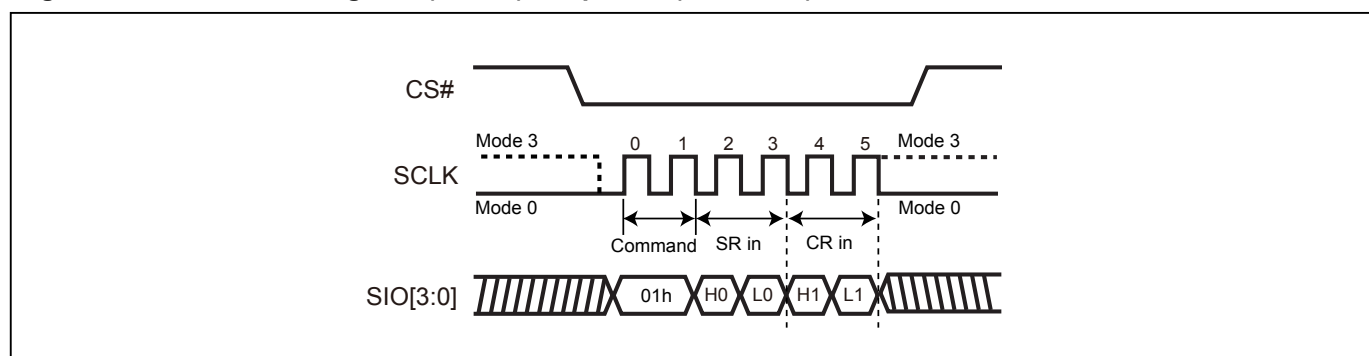

## Software Protected Mode (SPM):

- When SRWD bit=0, no matter WP#/SIO2 is low or high, the WREN instruction may set the WEL bit and can change the values of SRWD, BP3, BP2, BP1, BP0. The protected area, which is defined by BP3, BP2, BP1, BP0 and T/B bit, is at software protected mode (SPM).
- When SRWD bit=1 and WP#/SIO2 is high, the WREN instruction may set the WEL bit can change the values of SRWD, BP3, BP2, BP1, BP0. The protected area, which is defined by BP3, BP2, BP1, BP0 and T/B bit, is at software protected mode (SPM)

## Note:

If SRWD bit=1 but WP#/SIO2 is low, it is impossible to write the Status Register even if the WEL bit has previously been set. It is rejected to write the Status Register and not be executed.

## Hardware Protected Mode (HPM):

- When SRWD bit=1, and then WP#/SIO2 is low (or WP#/SIO2 is low before SRWD bit=1), it enters the hardware protected mode (HPM). The data of the protected area is protected by software protected mode by BP3, BP2, BP1, BP0 and T/B bit and hardware protected mode by the WP#/SIO2 to against data modification.

## Note:


To exit the hardware protected mode requires WP#/SIO2 driving high once the hardware protected mode is entered. If the WP#/SIO2 pin is permanently connected to high, the hardware protected mode can never be entered; only can use software protected mode via BP3, BP2, BP1, BP0 and T/B bit.

If the system enter QPI or set QE=1, the feature of HPM will be disabled.


**Table 11. Protection Modes**

| Mode                           | Status register condition                                                                           | WP# and SRWD bit status                                            | Memory                                             |
|--------------------------------|-----------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|----------------------------------------------------|
| Software protection mode (SPM) | Status register can be written in (WEL bit is set to "1") and the SRWD, BP0-BP3 bits can be changed | WP#=1 and SRWD bit=0, or WP#=0 and SRWD bit=0, or WP#=1 and SRWD=1 | The protected area cannot be programmed or erased. |
| Hardware protection mode (HPM) | The SRWD, BP0-BP3 of status register bits cannot be changed                                         | WP#=0, SRWD bit=1                                                  | The protected area cannot be programmed or erased. |

Note: As defined by the values in the Block Protect (BP3, BP2, BP1, BP0) bits of the Status Register, as shown in ["Table 2. Protected Area Sizes"](#).

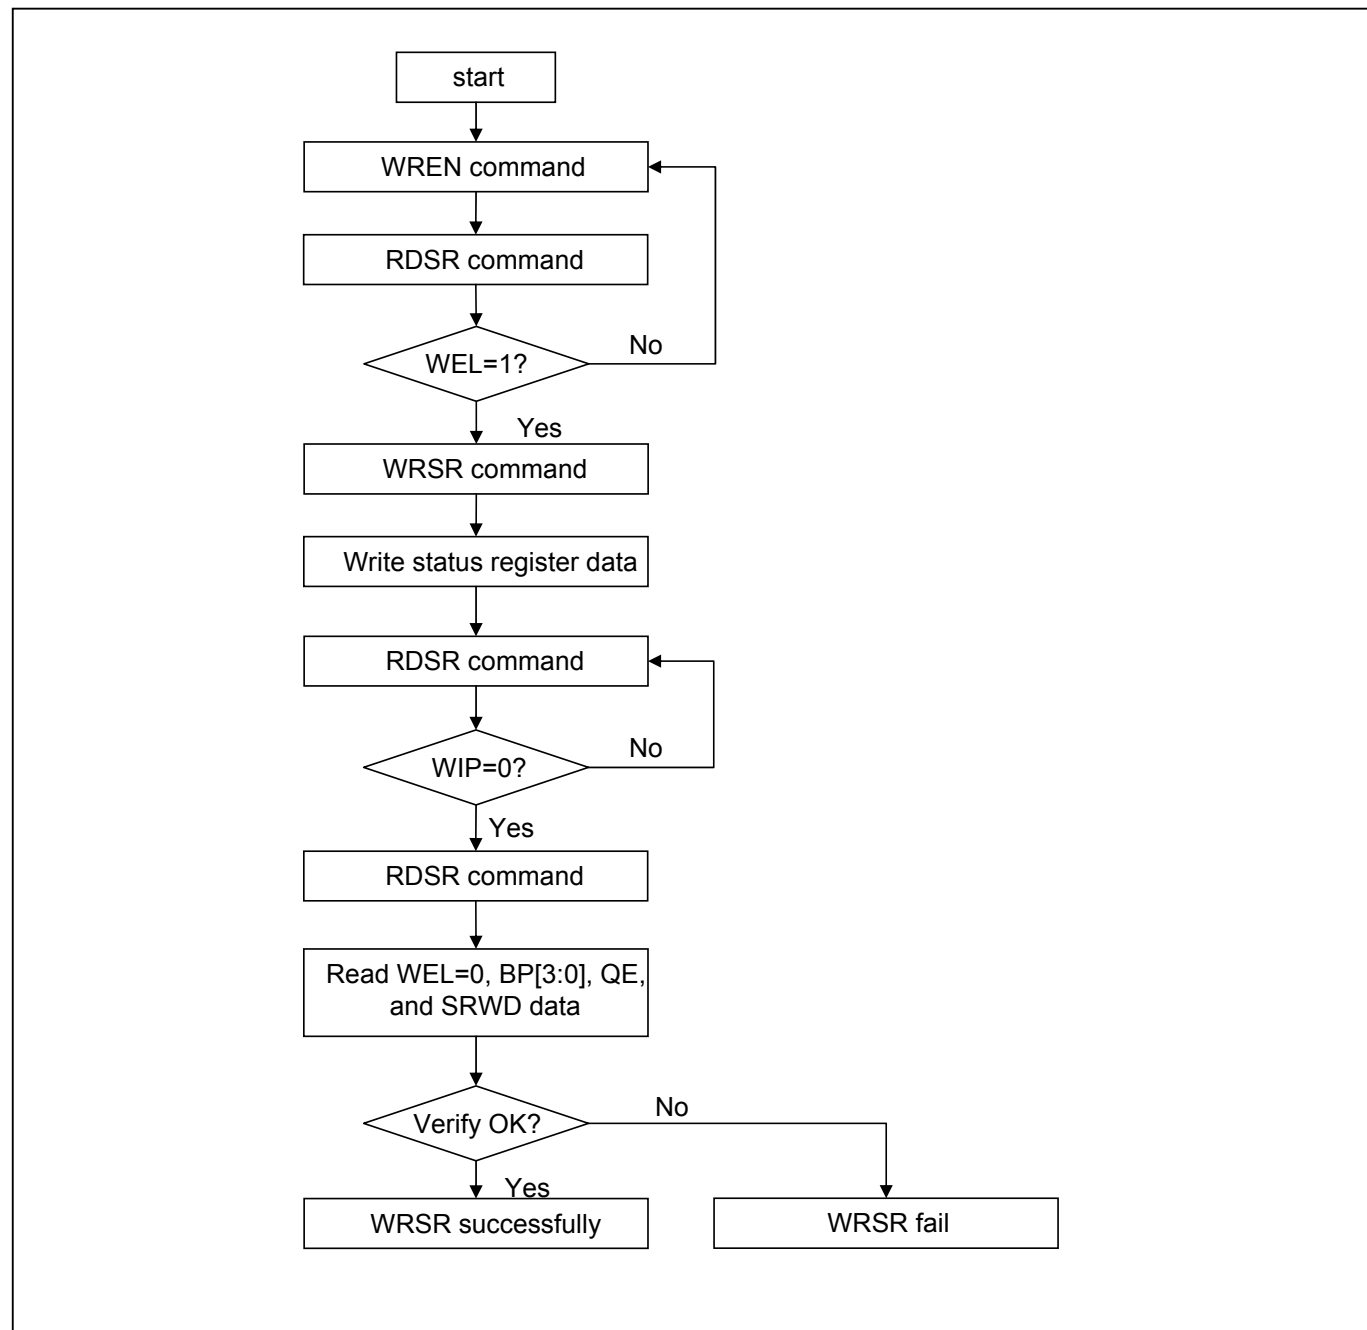**Figure 29. WRSR flow**

**Figure 30. WP# Setup Timing and Hold Timing during WRSR when SRWD=1**

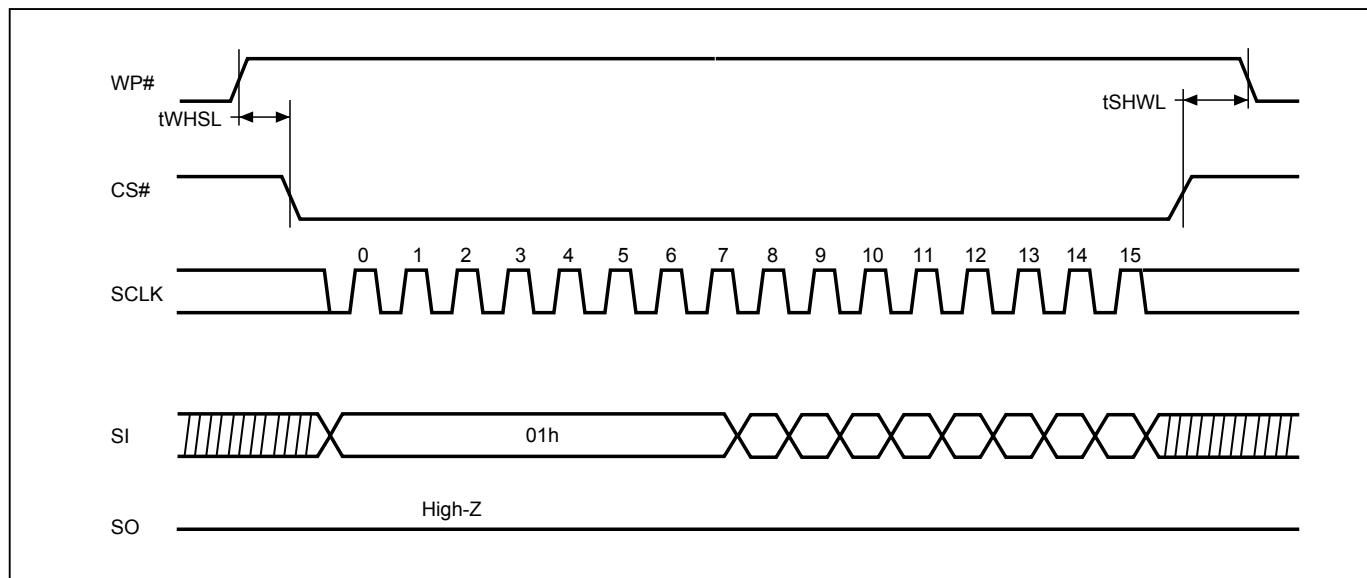

**Note:** WP# must be kept high until the embedded operation finish.

**9-11. Enter 4-byte mode (EN4B)**

The EN4B instruction enables accessing the address length of 32-bit for the memory area of higher density (larger than 128Mb). The device default is in 24-bit address mode; after sending out the EN4B instruction, the bit5 (4BYTE bit) of Configuration Register will be automatically set to "1" to indicate the 4-byte address mode has been enabled. Once the 4-byte address mode is enabled, the address length becomes 32-bit instead of the default 24-bit. There are three methods to exit the 4-byte mode: writing exit 4-byte mode (EX4B) instruction, Reset or power-off.

All instructions are accepted normally, and just the address bit is changed from 24-bit to 32-bit.

The following commands don't support 4-byte address: RDSFDP, RES and REMS.

The sequence of issuing EN4B instruction is: CS# goes low → send EN4B instruction to enter 4-byte mode (automatically set 4BYTE bit as "1") → CS# goes high.

**9-12. Exit 4-byte mode (EX4B)**

The EX4B instruction is executed to exit the 4-byte address mode and return to the default 3-bytes address mode. After sending out the EX4B instruction, the bit5 (4BYTE bit) of Configuration Register will be cleared to be "0" to indicate the exit of the 4-byte address mode. Once exiting the 4-byte address mode, the address length will return to 24-bit.

The sequence of issuing EX4B instruction is: CS# goes low → send EX4B instruction to exit 4-byte mode (automatically clear the 4BYTE bit to be "0") → CS# goes high.

### 9-13. Read Data Bytes (READ)


The read instruction is for reading data out. The address is latched on rising edge of SCLK, and data shifts out on the falling edge of SCLK at a maximum frequency  $f_R$ . The first address byte can be at any location. The address is automatically increased to the next higher address after each byte data is shifted out, so the whole memory can be read out at a single READ instruction. The address counter rolls over to 0 when the highest address has been reached.

The default read mode is 3-byte address, to access higher address (4-byte address) which requires to enter the 4-byte address read mode or to define EAR bit. To enter the 4-byte mode, please refer to the ["9-11. Enter 4-byte mode \(EN4B\)"](#) section.

The sequence of issuing READ instruction is: CS# goes low→sending READ instruction code→ 3-byte or 4-byte address on SI→ data out on SO→to end READ operation can use CS# to high at any time during data out.

While Program/Erase/Write Status Register cycle is in progress, READ instruction is rejected without any impact on the Program/Erase/Write Status Register current cycle.

**Figure 31. Read Data Bytes (READ) Sequence (SPI Mode only)**

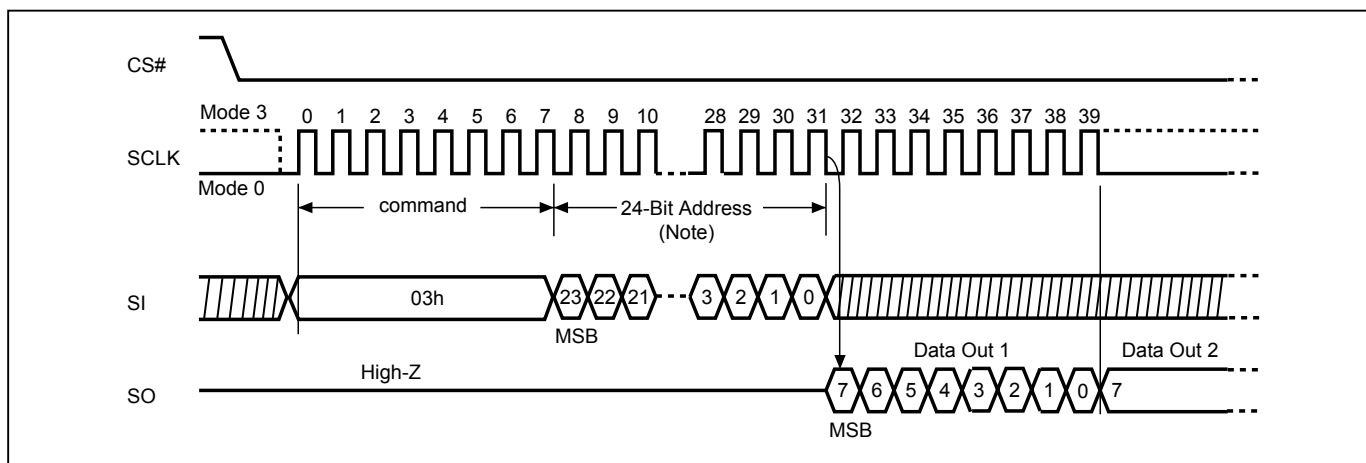

**Note:** Please note the address cycles above are based on 3-byte address mode. For 4-byte address mode, the address cycles will be increased.

#### 9-14. Read Data Bytes at Higher Speed (FAST\_READ)


The FAST\_READ instruction is for quickly reading data out. The address is latched on rising edge of SCLK, and data of each bit shifts out on the falling edge of SCLK at a maximum frequency  $f_C$ . The first address byte can be at any location. The address is automatically increased to the next higher address after each byte data is shifted out, so the whole memory can be read out at a single FAST\_READ instruction. The address counter rolls over to 0 when the highest address has been reached.

The default read mode is 3-byte address, to access higher address (4-byte address) which requires to enter the 4-byte address read mode or to define EAR bit. To enter the 4-byte mode, please refer to the ["9-11. Enter 4-byte mode \(EN4B\)"](#) section.

The sequence of issuing FAST\_READ instruction is: CS# goes low → send FAST\_READ instruction code → 3-byte or 4-byte address on SI → 8 dummy cycles (default) → data out on SO → to end FAST\_READ operation can use CS# to high at any time during data out.

While Program/Erase/Write Status Register cycle is in progress, FAST\_READ instruction is rejected without any impact on the Program/Erase/Write Status Register current cycle.

**Figure 32. Read at Higher Speed (FAST\_READ) Sequence (SPI Mode)**

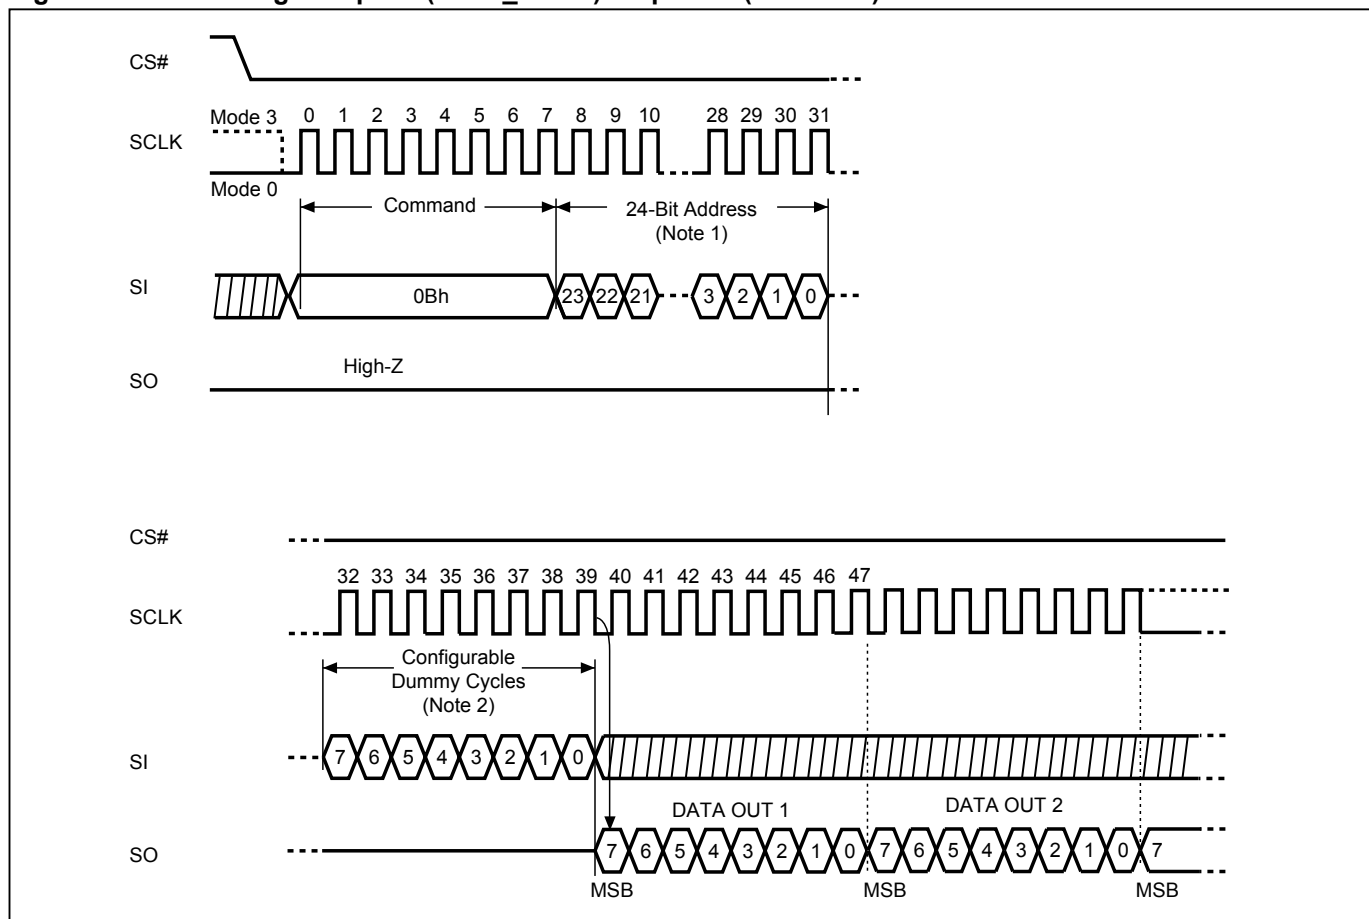

**Notes:**

1. Please note the address cycles above are based on 3-byte address mode. For 4-byte address mode, the address cycles will be increased.
2. Configuration Dummy cycle numbers will be different depending on the bit6 & bit 7 (DC0 & DC1) setting in configuration register.

### 9-15. Dual Output Read Mode (DREAD)


The DREAD instruction enables double throughput of the Serial NOR Flash in read mode. The address is latched on rising edge of SCLK, and data of every two bits (interleave on 2 I/O pins) shift out on the falling edge of SCLK at a maximum frequency fT. The first address byte can be at any location. The address is automatically increased to the next higher address after each byte data is shifted out, so the whole memory can be read out at a single DREAD instruction. The address counter rolls over to 0 when the highest address has been reached. Once writing DREAD instruction, the following data out will perform as 2-bit instead of previous 1-bit.

The default read mode is 3-byte address, to access higher address (4-byte address) which requires to enter the 4-byte address read mode or to define EAR bit. To enter the 4-byte mode, please refer to the "[9-11. Enter 4-byte mode \(EN4B\)](#)" section.

The sequence of issuing DREAD instruction is: CS# goes low→ send DREAD instruction→3-byte or 4-byte address on SIO0→ 8 dummy cycles (default) on SIO0→ data out interleave on SIO1 & SIO0→ to end DREAD operation can use CS# to high at any time during data out.

While Program/Erase/Write Status Register cycle is in progress, DREAD instruction is rejected without any impact on the Program/Erase/Write Status Register current cycle.

**Figure 33. Dual Read Mode Sequence (SPI Mode only)**

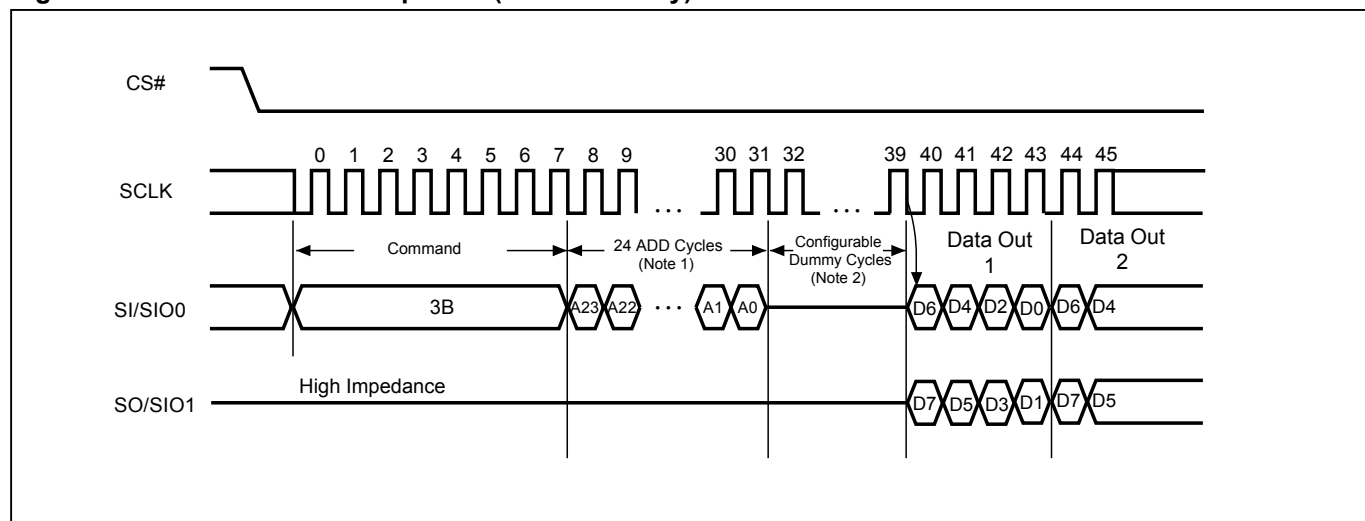

**Notes:**

1. Please note the address cycles above are based on 3-byte address mode. For 4-byte address mode, the address cycles will be increased.
2. Configuration Dummy cycle numbers will be different depending on the bit6 & bit 7 (DC0 & DC1) setting in configuration register.

## 9-16. 2 x I/O Read Mode (2READ)


The 2READ instruction enables double throughput of the Serial NOR Flash in read mode. The address is latched on rising edge of SCLK, and data of every two bits (interleave on 2 I/O pins) shift out on the falling edge of SCLK at a maximum frequency  $f_T$ . The first address byte can be at any location. The address is automatically increased to the next higher address after each byte data is shifted out, so the whole memory can be read out at a single 2READ instruction. The address counter rolls over to 0 when the highest address has been reached. Once writing 2READ instruction, the following address/dummy/data out will perform as 2-bit instead of previous 1-bit.

The default read mode is 3-byte address, to access higher address (4-byte address) which requires to enter the 4-byte address read mode or to define EAR bit. To enter the 4-byte mode, please refer to "9-11. Enter 4-byte mode (EN4B)" section.

The sequence of issuing 2READ instruction is: CS# goes low → send 2READ instruction → 3-byte or 4-byte address interleave on SIO1 & SIO0 → 4 dummy cycles (default) on SIO1 & SIO0 → data out interleave on SIO1 & SIO0 → to end 2READ operation can use CS# to high at any time during data out.

While Program/Erase/Write Status Register cycle is in progress, 2READ instruction is rejected without any impact on the Program/Erase/Write Status Register current cycle.

**Figure 34. 2 x I/O Read Mode Sequence (SPI Mode only)**

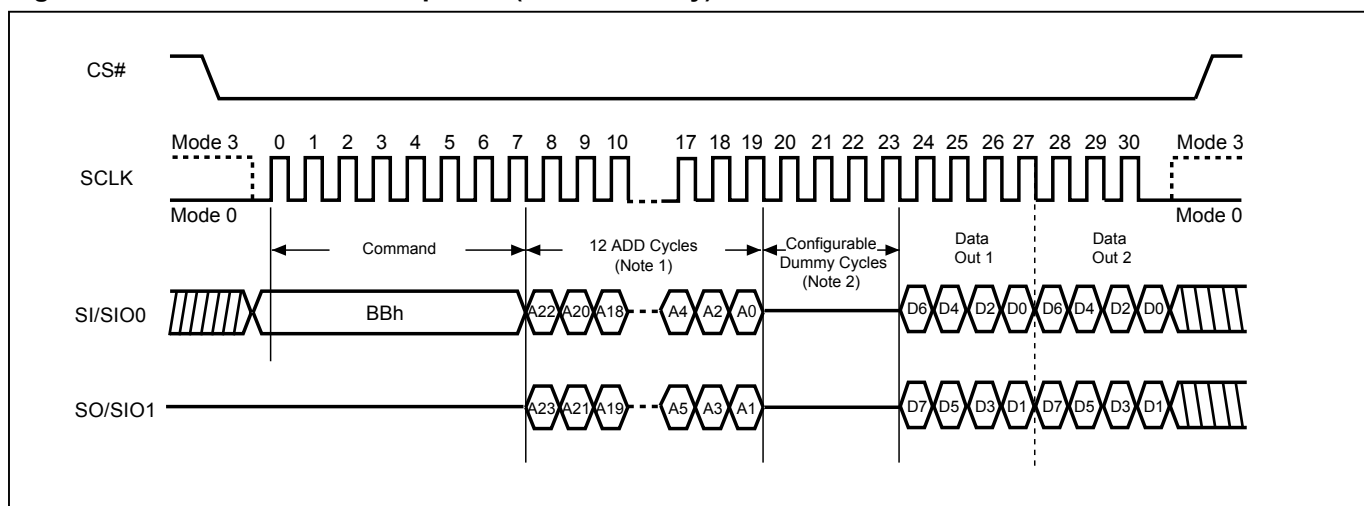

### Notes:

1. Please note the address cycles above are based on 3-byte address mode. For 4-byte address mode, the address cycles will be increased.
2. Configuration Dummy cycle numbers will be different depending on the bit6 & bit 7 (DC0 & DC1) setting in configuration register.

## 9-17. Quad Read Mode (QREAD)


The QREAD instruction enables quad throughput of the Serial NOR Flash in read mode. A Quad Enable (QE) bit of status Register must be set to "1" before sending the QREAD instruction. The address is latched on rising edge of SCLK, and data of every four bits (interleave on 4 I/O pins) shift out on the falling edge of SCLK at a maximum frequency fQ. The first address byte can be at any location. The address is automatically increased to the next higher address after each byte data is shifted out, so the whole memory can be read out at a single QREAD instruction. The address counter rolls over to 0 when the highest address has been reached. Once writing QREAD instruction, the following data out will perform as 4-bit instead of previous 1-bit.

The default read mode is 3-byte address, to access higher address (4-byte address) which requires to enter the 4-byte address read mode or to define EAR bit. To enter the 4-byte mode, please refer to ["9-11. Enter 4-byte mode \(EN4B\)"](#) section.

The sequence of issuing QREAD instruction is: CS# goes low → send QREAD instruction → 3-byte or 4-byte address on SI → 8 dummy cycle (Default) → data out interleave on SIO3, SIO2, SIO1 & SIO0 → to end QREAD operation can use CS# to high at any time during data out.

While Program/Erase/Write Status Register cycle is in progress, QREAD instruction is rejected without any impact on the Program/Erase/Write Status Register current cycle.

**Figure 35. Quad Read Mode Sequence (SPI Mode only)**

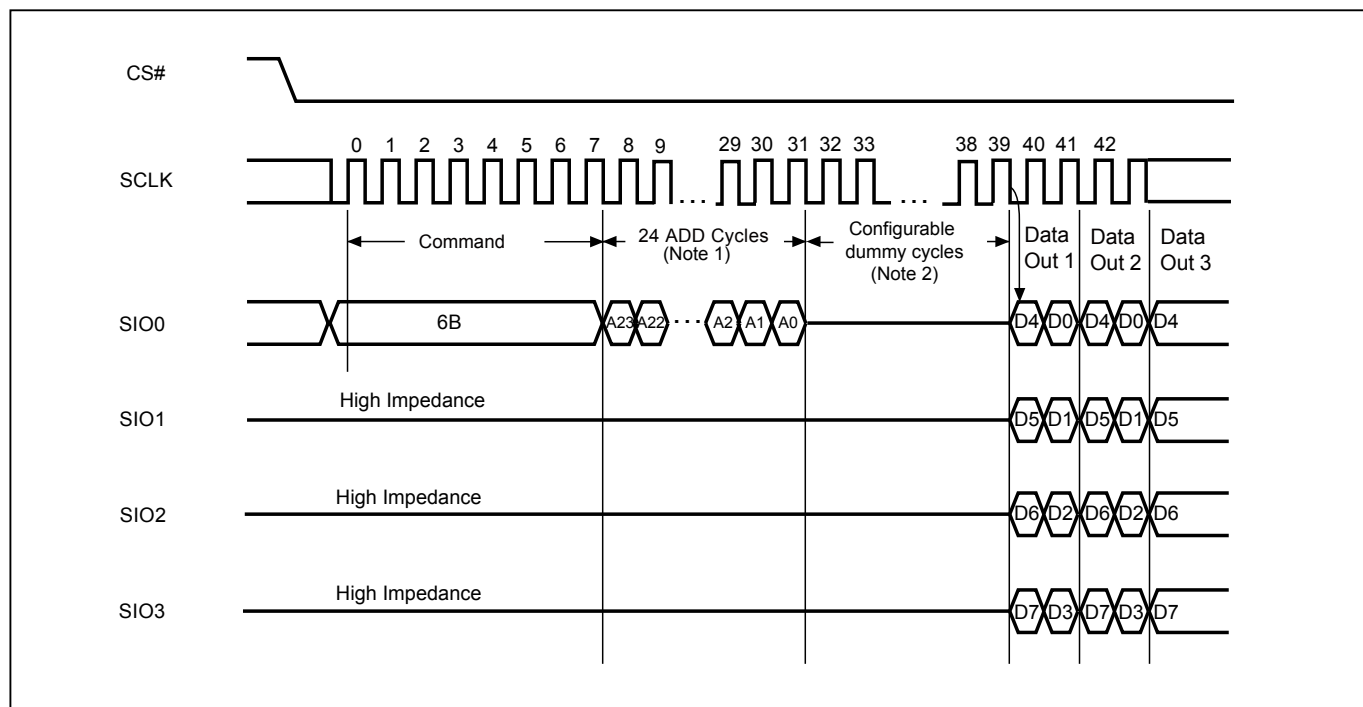

### Notes:

1. Please note the address cycles above are based on 3-byte address mode. For 4-byte address mode, the address cycles will be increased.
2. Configuration Dummy cycle numbers will be different depending on the bit6 & bit 7 (DC0 & DC1) setting in configuration register.

**9-18. 4 x I/O Read Mode (4READ)**

The 4READ instruction enables quad throughput of the Serial NOR Flash in read mode. A Quad Enable (QE) bit of status Register must be set to "1" before sending the 4READ instruction. The address is latched on rising edge of SCLK, and data of every four bits (interleave on 4 I/O pins) shift out on the falling edge of SCLK at a maximum frequency fQ. The first address byte can be at any location. The address is automatically increased to the next higher address after each byte data is shifted out, so the whole memory can be read out at a single 4READ instruction. The address counter rolls over to 0 when the highest address has been reached. Once writing 4READ instruction, the following address/dummy/data out will perform as 4-bit instead of previous 1-bit.


The default read mode is 3-byte address, to access higher address (4-byte address) which requires to enter the 4-byte address read mode or to define EAR bit. To enter the 4-byte mode, please refer to ["9-11. Enter 4-byte mode \(EN4B\)"](#) section.

**4 x I/O Read on SPI Mode (4READ)** The sequence of issuing 4READ instruction is: CS# goes low→ send 4READ instruction→ 3-byte or 4-byte address interleave on SIO3, SIO2, SIO1 & SIO0→ 6 dummy cycles (Default) →data out interleave on SIO3, SIO2, SIO1 & SIO0→ to end 4READ operation can use CS# to high at any time during data out.

**4 x I/O Read on QPI Mode (4READ)** The 4READ instruction also support on QPI command mode. The sequence of issuing 4READ instruction QPI mode is: CS# goes low→ send 4READ instruction→ 3-byte or 4-byte address interleave on SIO3, SIO2, SIO1 & SIO0→ 6 dummy cycles (Default) →data out interleave on SIO3, SIO2, SIO1 & SIO0→ to end 4READ operation can use CS# to high at any time during data out.

While Program/Erase/Write Status Register cycle is in progress, 4READ instruction is rejected without any impact on the Program/Erase/Write Status Register current cycle.


**Figure 36. 4 x I/O Read Mode Sequence (SPI Mode)**

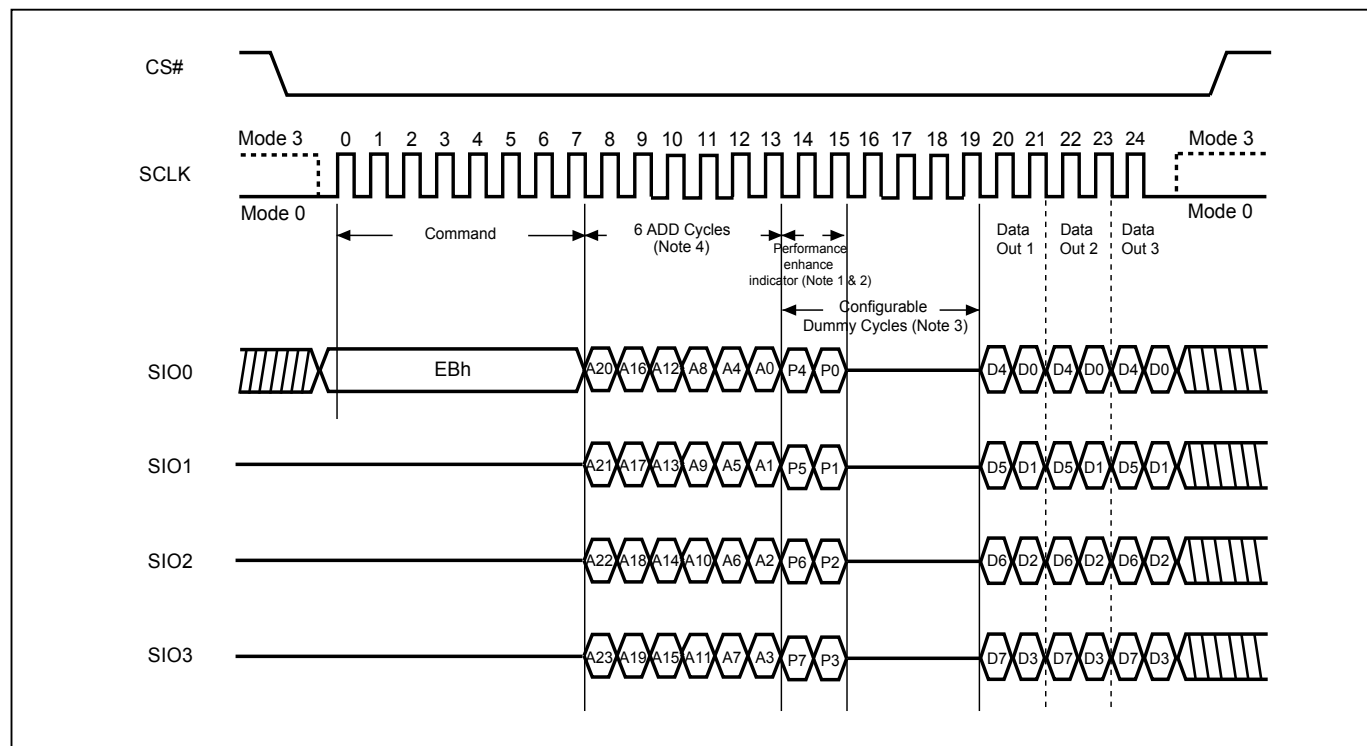

**Notes:**

1. Hi-impedance is inhibited for the two clock cycles.
2. P7≠P3, P6≠P2, P5≠P1 & P4≠P0 (Toggling) is inhibited.
3. Configuration Dummy cycle numbers will be different depending on the bit6 & bit 7 (DC0 & DC1) setting in configuration register.
4. Please note the address cycles above are based on 3-byte address mode. For 4-byte address mode, the address cycles will be increased.

**Figure 37. 4 x I/O Read Mode Sequence (QPI Mode)**

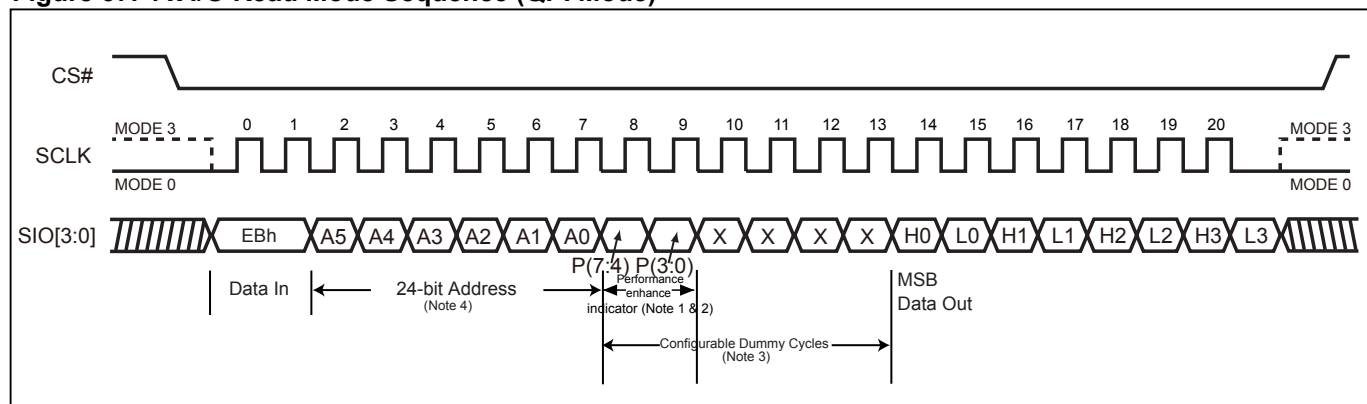

**Notes:**

1. Hi-impedance is inhibited for the two clock cycles.
2. P7≠P3, P6≠P2, P5≠P1 & P4≠P0 (Toggling) is inhibited.
3. Configuration Dummy cycle numbers will be different depending on the bit6 & bit 7 (DC0 & DC1) setting in configuration register.
4. Please note the address cycles above are based on 3-byte address mode. For 4-byte address mode, the address cycles will be increased.


**9-19. 4 x I/O Double Transfer Rate Read Mode (4DTRD)**

The 4DTRD instruction enables Double Transfer Rate throughput on quad I/O of Serial NOR Flash in read mode. A Quad Enable (QE) bit of status Register must be set to "1" before sending the 4DTRD instruction. The address (interleave on 4 I/O pins) is latched on both rising and falling edge of SCLK, and data (interleave on 4 I/O pins) shift out on both rising and falling edge of SCLK. The 8-bit address can be latched-in at one clock, and 8-bit data can be read out at one clock, which means four bits at rising edge of clock, the other four bits at falling edge of clock. The first address byte can be at any location. The address is automatically increased to the next higher address after each byte data is shifted out, so the whole memory can be read out at a single 4DTRD instruction. The address counter rolls over to 0 when the highest address has been reached. Once writing 4DTRD instruction, the following address/dummy/data out will perform as 8-bit instead of previous 1-bit.

Both SPI (8 clocks) and QPI (2 clocks) command cycle can be accepted by this instruction. The SIO[3:1] are don't care during SPI mode.

While Program/Erase/Write Status Register cycle is in progress, 4DTRD instruction is rejected without any impact on the Program/Erase/Write Status Register current cycle.


**Figure 38. Fast Quad I/O DT Read (4DTRD) Sequence (SPI Mode)**

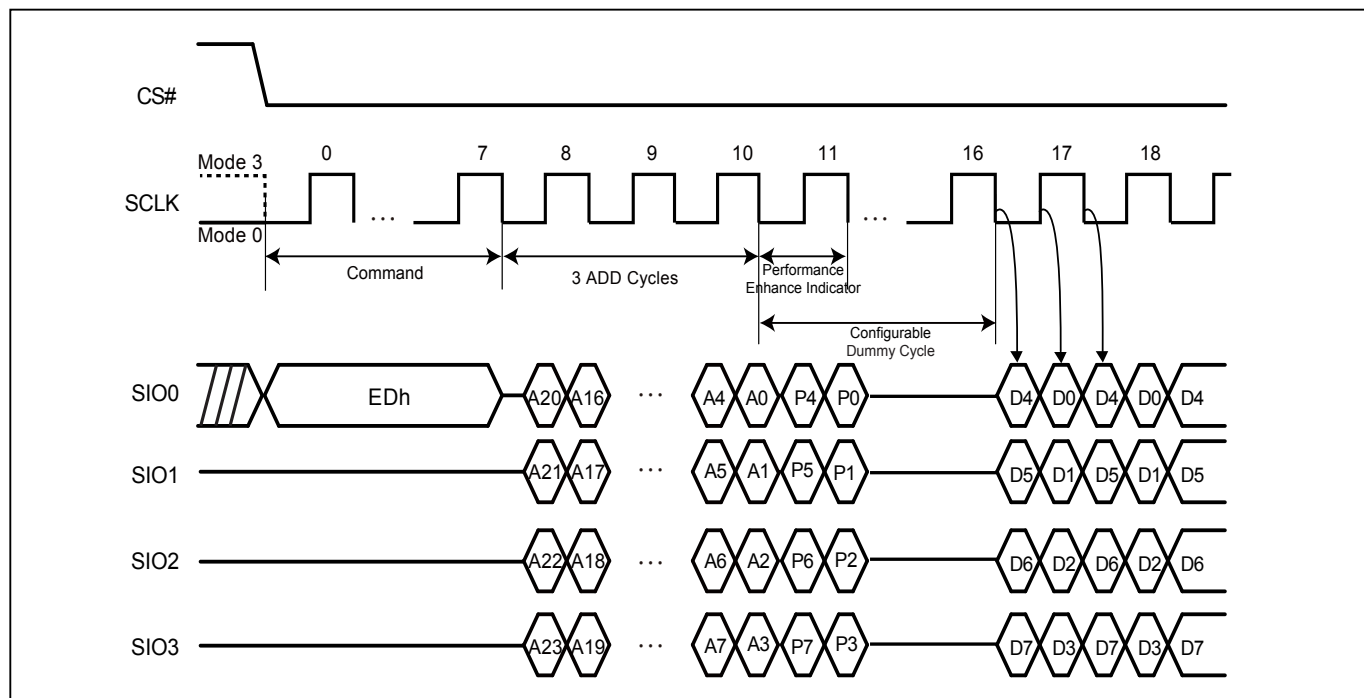

**Notes:**

1. Hi-impedance is inhibited for this clock cycle.
2. P7≠P3, P6≠P2, P5≠P1 & P4≠P0 (Toggling) will result in entering the performance enhance mode.
3. Configuration Dummy cycle numbers will be different depending on the bit6 & bit 7 (DC0 & DC1) setting in configuration register.
4. Please note the address cycles above are based on 3-byte address mode. For 4-byte address mode, the address cycles will be increased.

**Figure 39. Fast Quad I/O DT Read (4DTRD) Sequence (QPI Mode)**

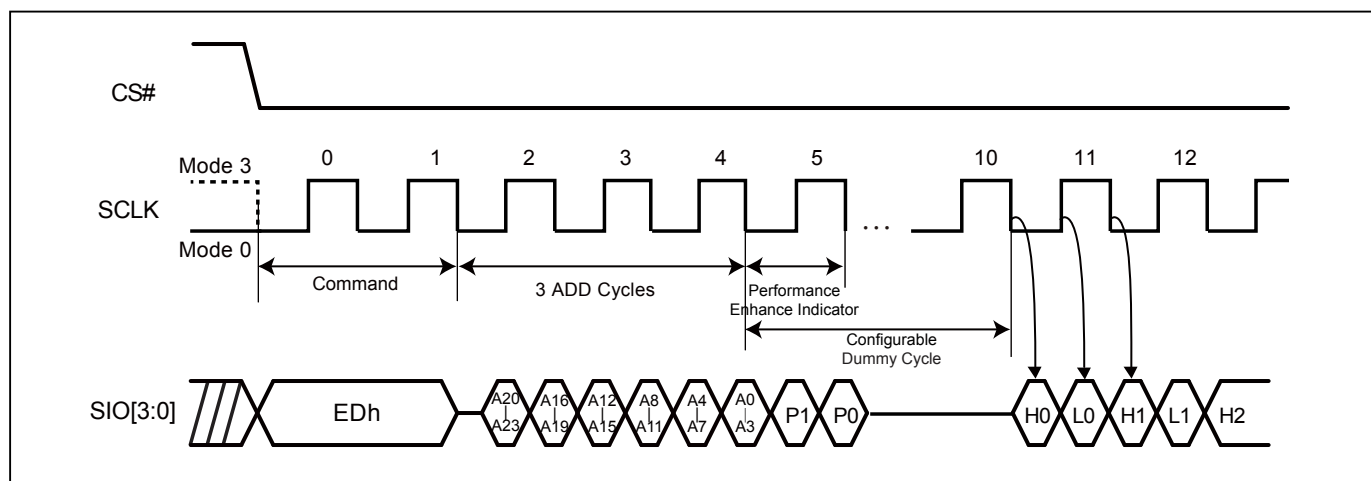

**Notes:**

1. Please note the address cycles above are based on 3-byte address mode. For 4-byte address mode, the address cycles will be increased.
2. Configuration Dummy cycle numbers will be different depending on the bit6 & bit 7 (DC0 & DC1) setting in configuration register.

## 9-20. Preamble Bit


The Preamble Bit data pattern supports system/memory controller to determine valid window of data output more easily and improve data capture reliability while the flash memory is running in high frequency.

Preamble Bit data pattern can be enabled or disabled by setting the bit4 of Configuration register (Preamble bit Enable bit). Once the CR<4> is set, the preamble bit is inputted into dummy cycles.


Enabling preamble bit will not affect the function of enhance mode bit. In Dummy cycles, performance enhance mode bit still operates with the same function. Preamble bit will output after performance enhance mode bit.

The preamble bit is a fixed 8-bit data pattern (00110100). While dummy cycle number reaches 10, the complete 8 bits will start to output right after the performance enhance mode bit. While dummy cycle is not sufficient of 10 cycles, the rest of the preamble bits will be cut. For example, 8 dummy cycles will cause 6 preamble bits to output, and 6 dummy cycles will cause 4 preamble bits to output.


**Figure 40. SDR 1I/O (10DC)**

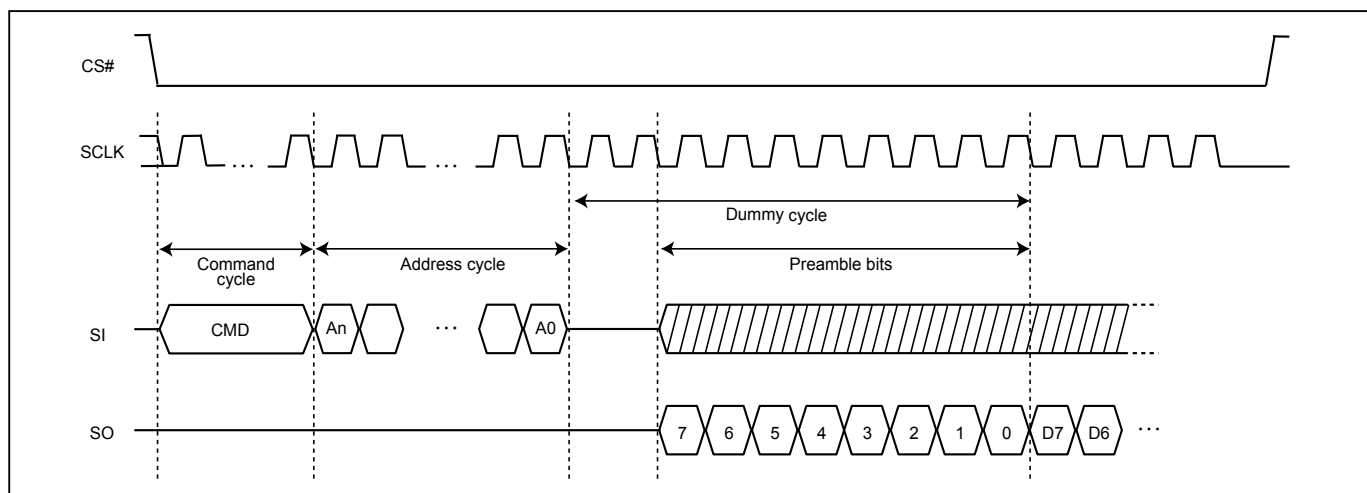


**Figure 41. SDR 1I/O (8DC)**

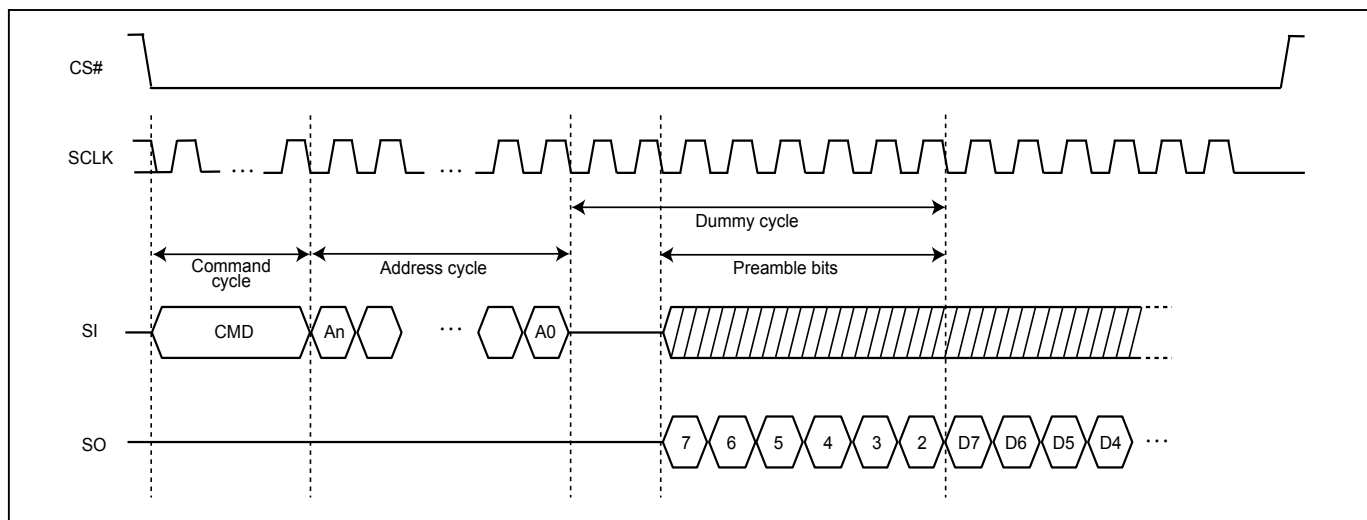


**Figure 42. SDR 2I/O (10DC)**

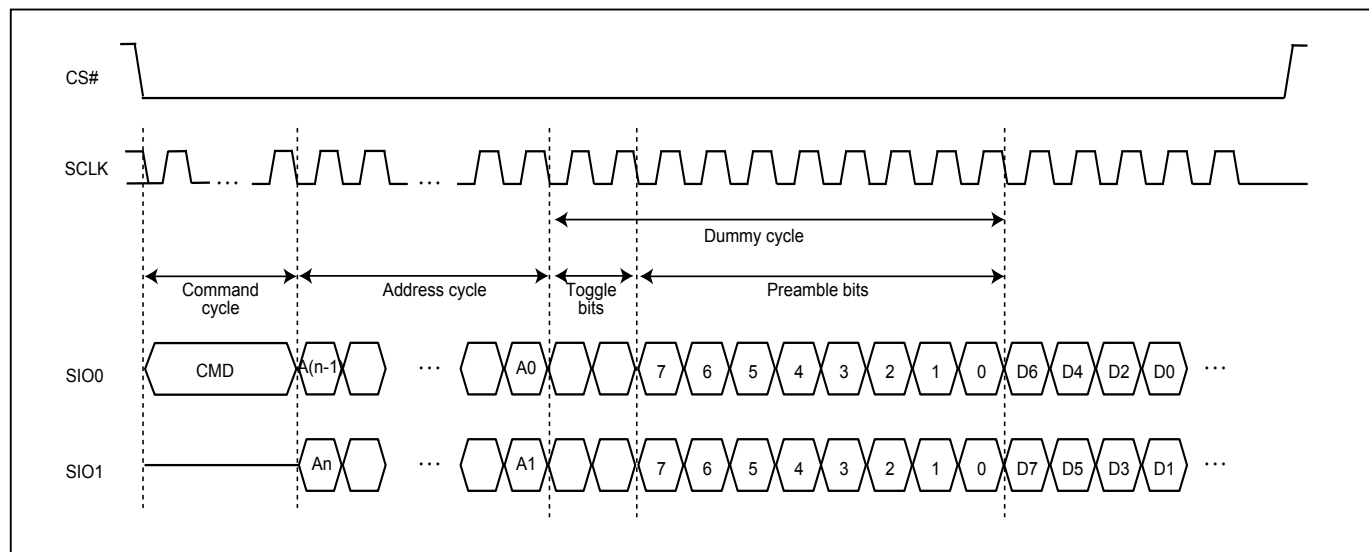


**Figure 43. SDR 2I/O (8DC)**

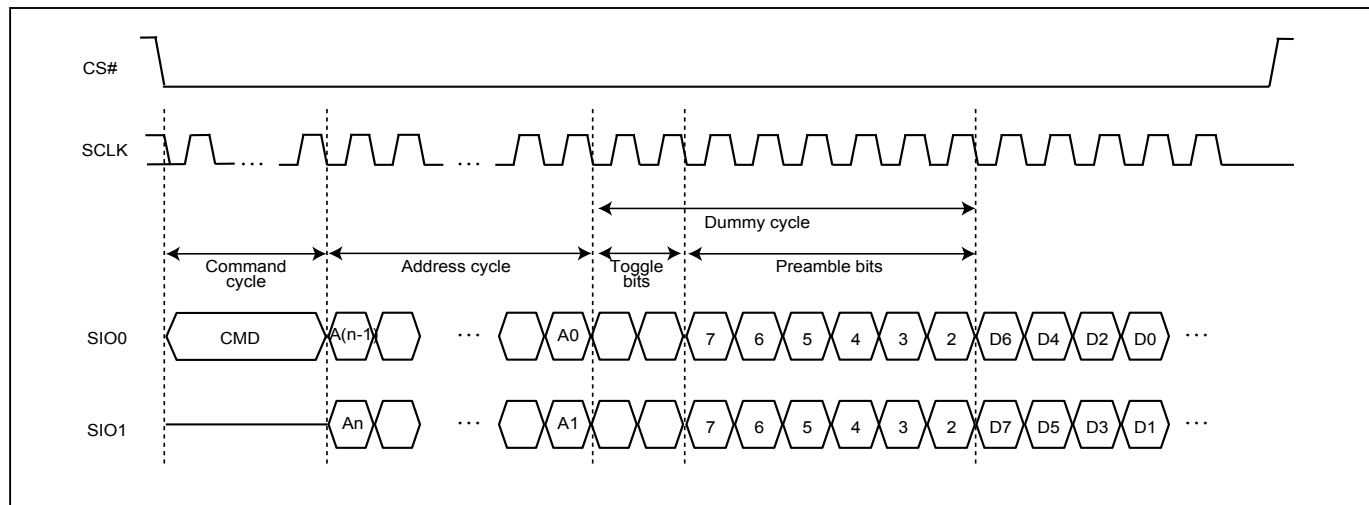


**Figure 44. SDR 4I/O (10DC)**

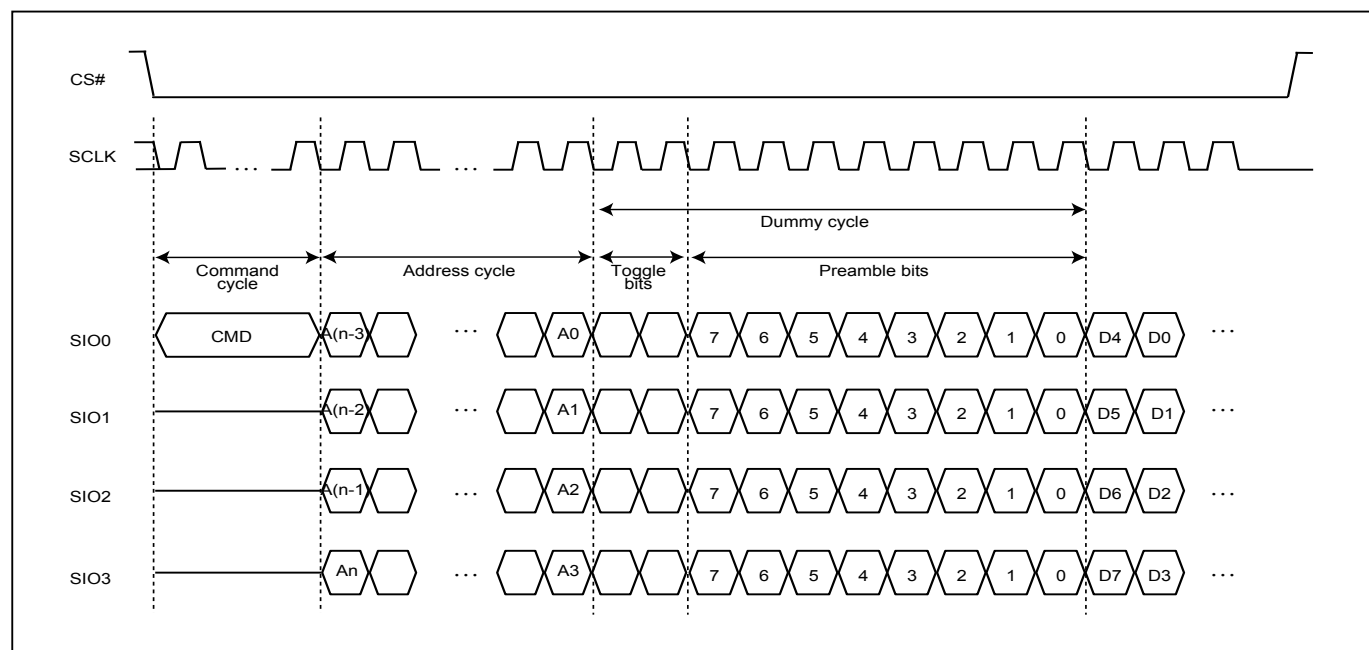

**Figure 45. SDR 4I/O (8DC)**

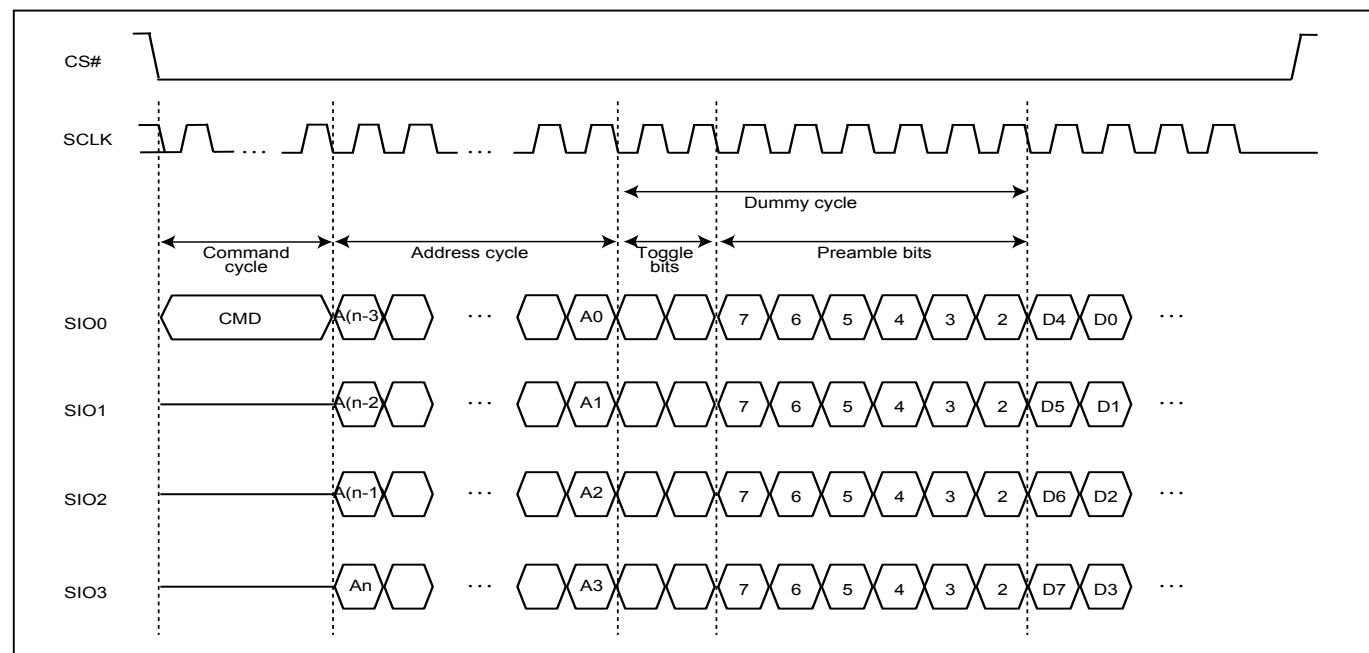


**Figure 46. DTR4IO (6DC)**

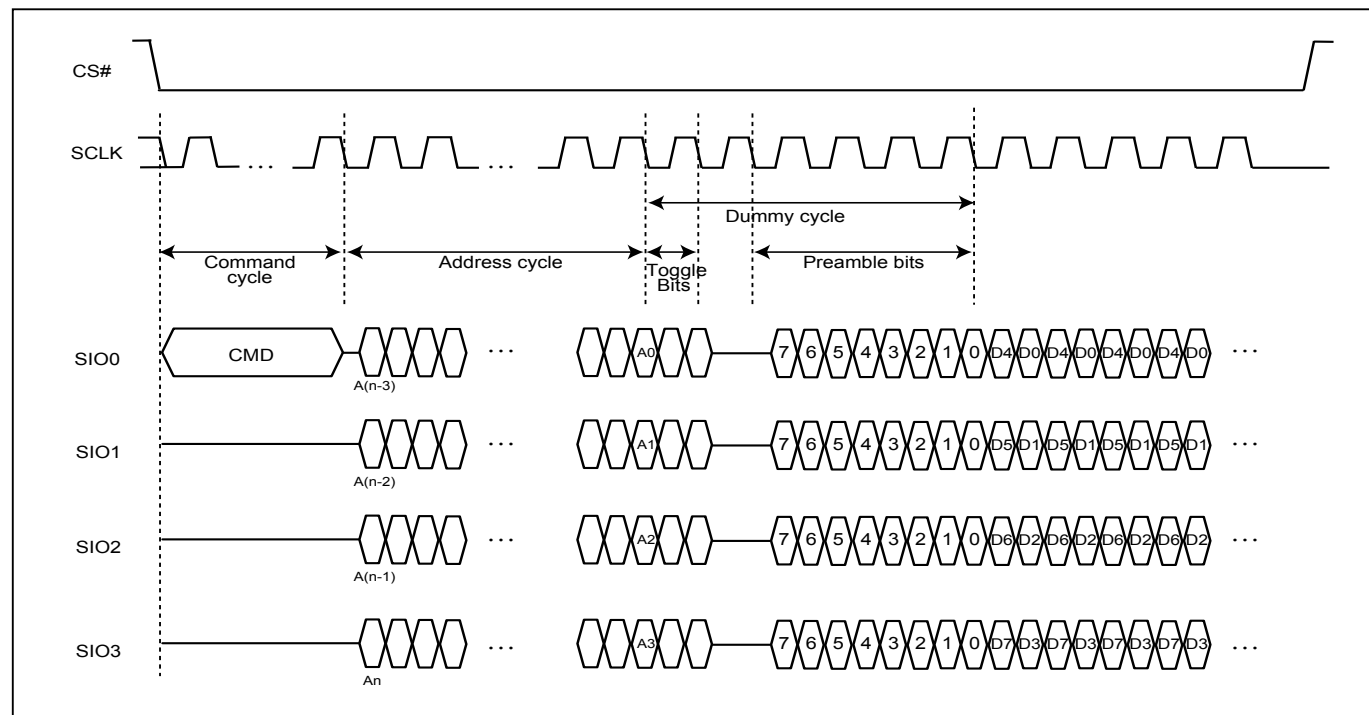


## 9-21. 4 Byte Address Command Set

The operation of 4-byte address command set was very similar to original 3-byte address command set. The only different is all the 4-byte command set request 4-byte address (A31-A0) followed by instruction code. The command set support 4-byte address including: READ4B, FAST\_READ4B, DREAD4B, 2READ4B, QREAD4B, 4READ4B, PP4B, 4PP4B, SE4B, BE32K4B, BE4B. Please note that it is not necessary to issue EN4B command before issuing any of 4-byte command set.


**Figure 47. Read Data Bytes using 4-Byte Address Sequence (READ4B)**

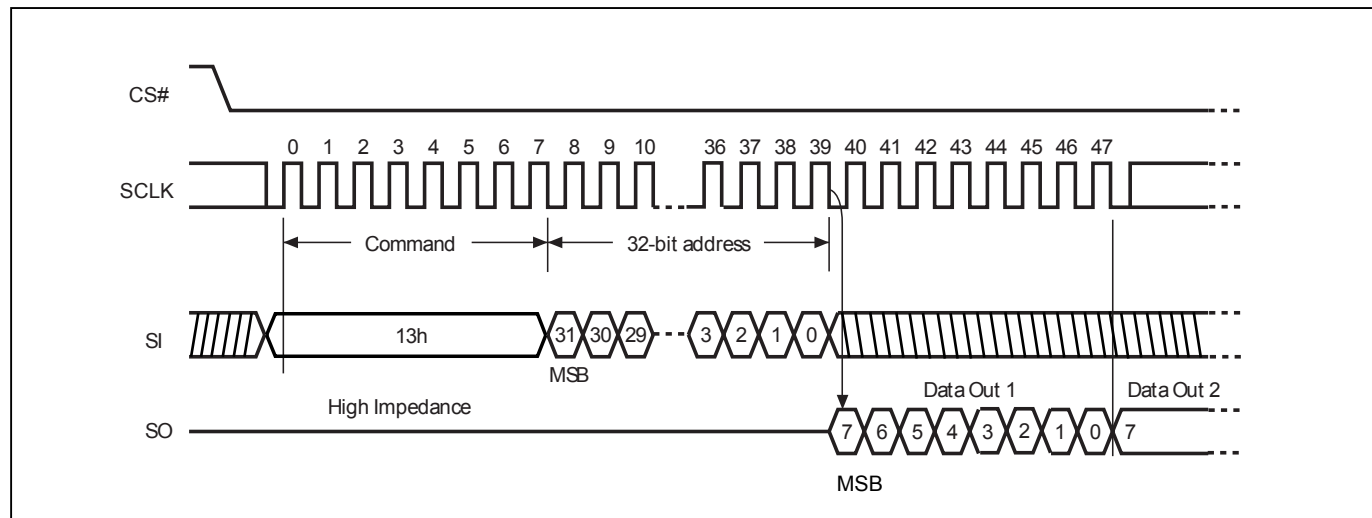


**Figure 48. Read Data Bytes at Higher Speed using 4-Byte Address Sequence (FASTREAD4B)**

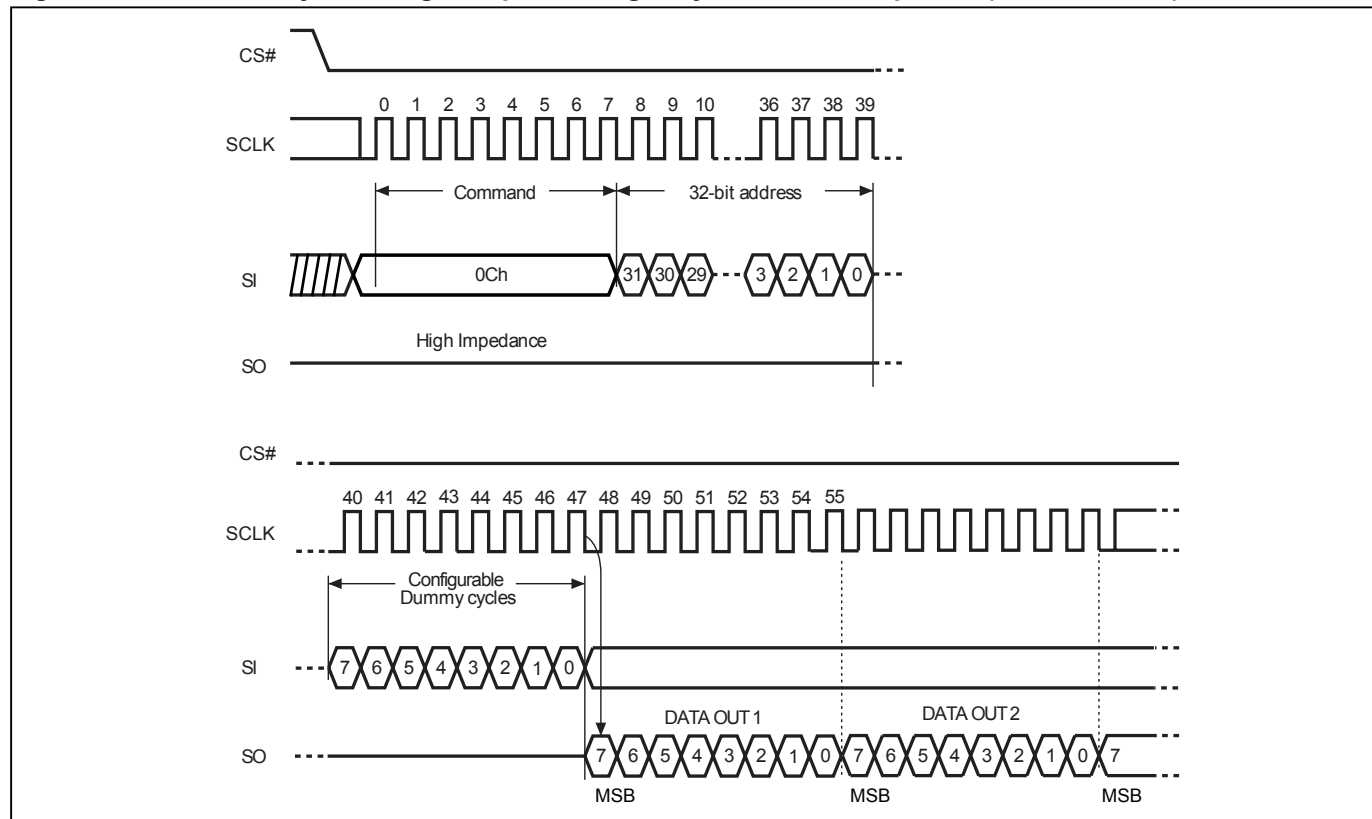


**Figure 49. 2 x I/O Fast Read using 4-Byte Address Sequence (2READ4B)**

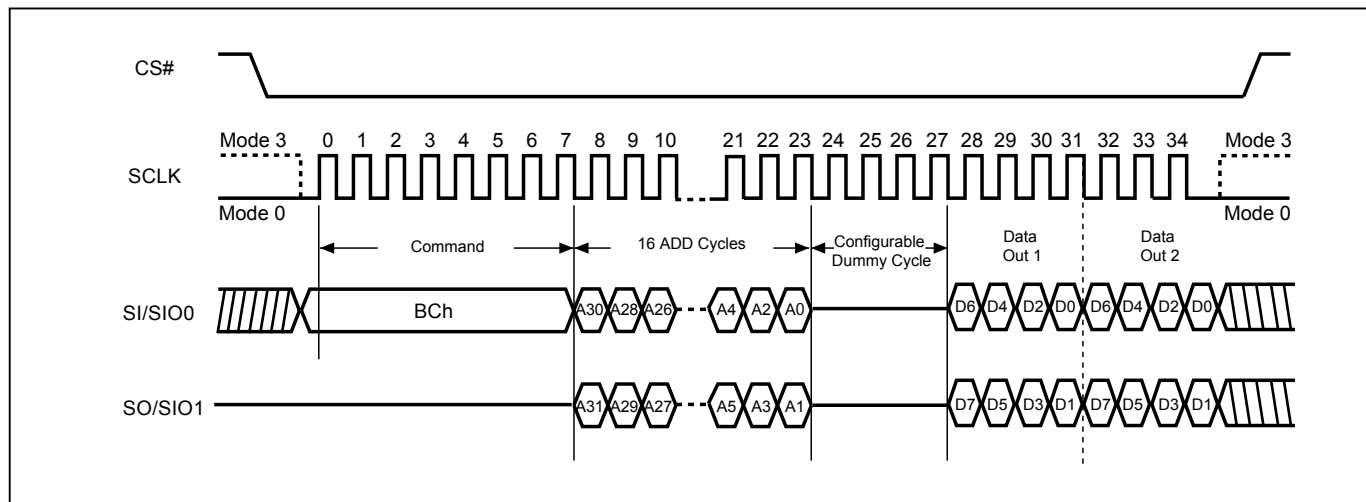

**Figure 50. 4 I/O Fast Read using 4-Byte Address sequence (4READ4B)**

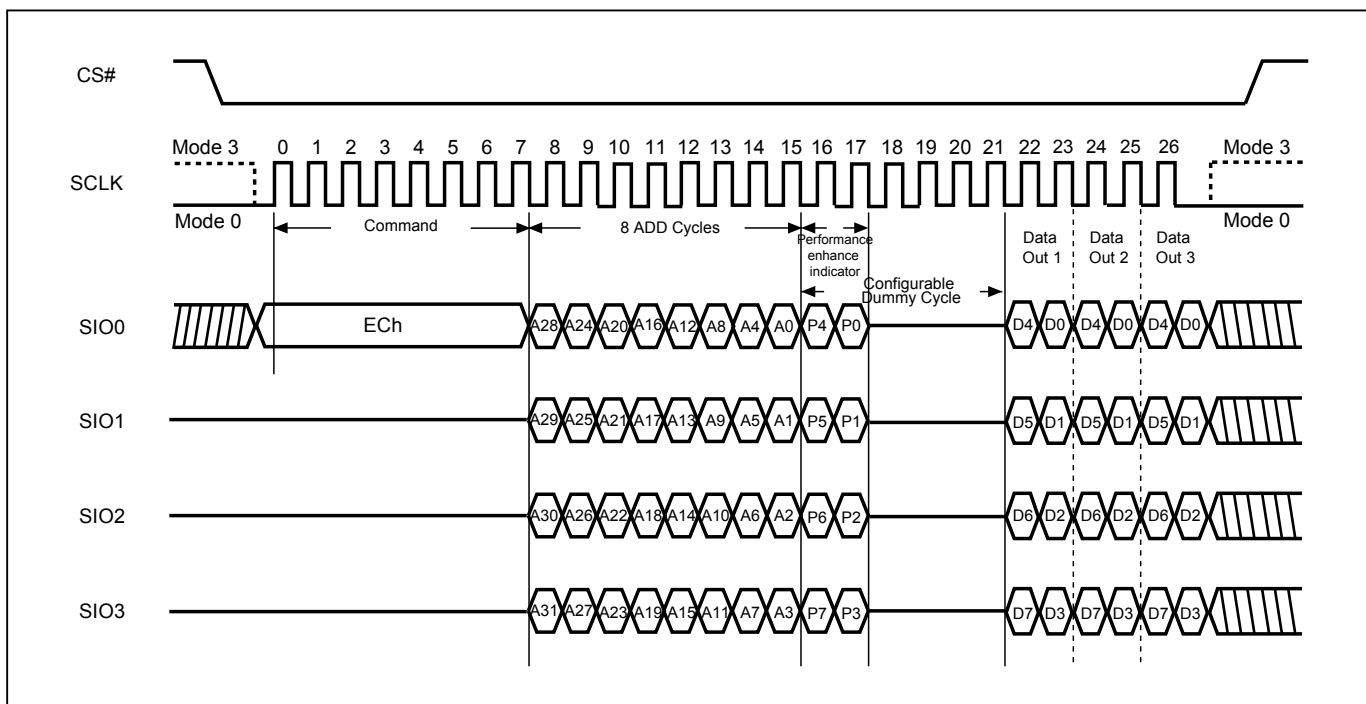


**Figure 51. Fast Quad I/O DT Read (4DTRD4B) Sequence (SPI Mode)**

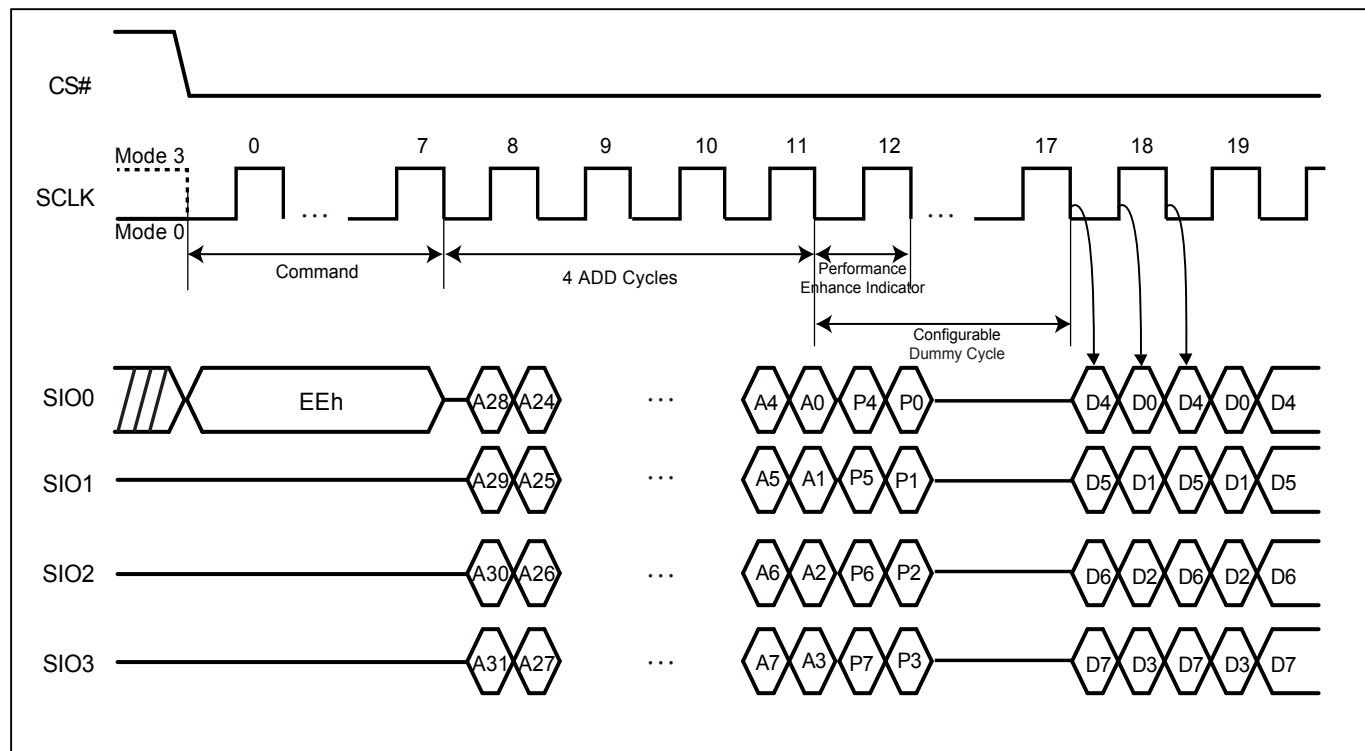

**Note:** Configuration Dummy cycle numbers will be different depending on the bit6 & bit7 (DC0 & DC1) setting in configuration register.

**Figure 52. Fast Quad I/O DT Read (4DTRD4B) Sequence (QPI Mode)**

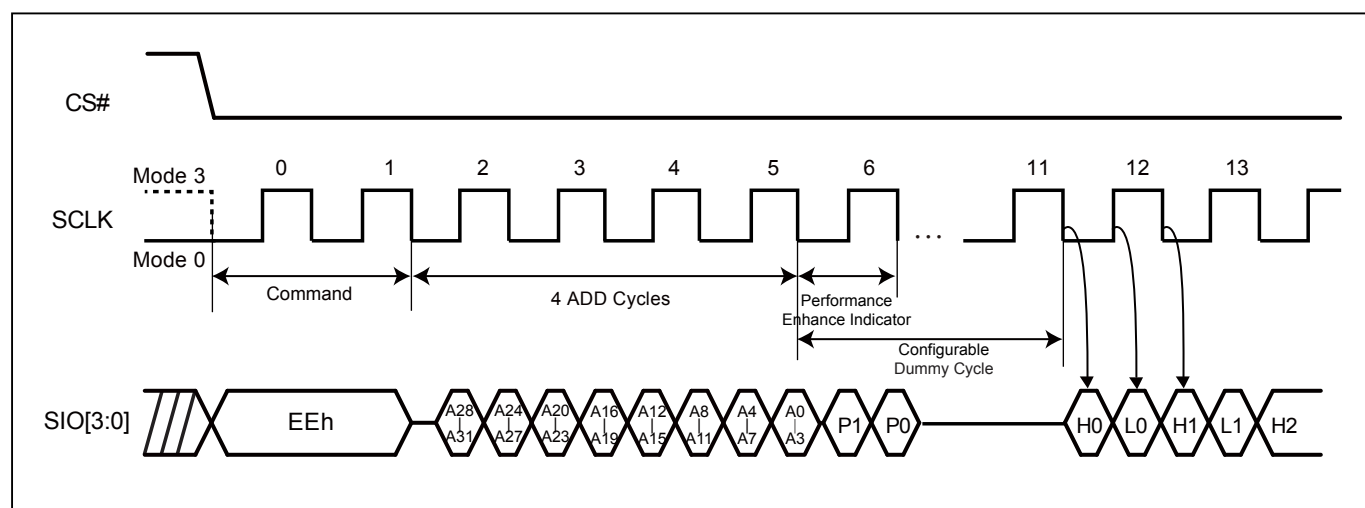

**Note:** Configuration Dummy cycle numbers will be different depending on the bit6 & bit7 (DC0 & DC1) setting in configuration register.

## 9-22. Burst Read


The Burst Read feature allows applications to fill a cache line with a fixed length of data without using multiple read commands. Burst Read is disabled by default at power-up or reset. Burst Read is enabled by setting the Burst Length. When the Burst Length is set, reads will wrap on the selected boundary (8/16/32/64-bytes) containing the initial target address. For example if an 8-byte Wrap Depth is selected, reads will wrap on the 8-byte-page-aligned boundary containing the initial read address.

To set the Burst Length, drive CS# low → send SET BURST LENGTH instruction code (C0h) → send WRAP CODE → drive CS# high. Refer to the table below for valid 8-bit Wrap Codes and their corresponding Wrap Depth.


| Data | Wrap Around | Wrap Depth |
|------|-------------|------------|
| 00h  | Yes         | 8-byte     |
| 01h  | Yes         | 16-byte    |
| 02h  | Yes         | 32-byte    |
| 03h  | Yes         | 64-byte    |
| 1xh  | No          | X          |

Once Burst Read is enabled, it will remain enabled until the device is power-cycled or reset. The SPI and QPI mode 4READ and 4READ4B read commands support the wrap around feature after Burst Read is enabled. To change the wrap depth, resend the Burst Read instruction with the appropriate Wrap Code. To disable Burst Read, send the Burst Read instruction with Wrap Code 1xh. QPI "EBh" "ECh" and SPI "EBh" "ECh" support wrap around feature after wrap around is enabled. Both SPI (8 clocks) and QPI (2 clocks) command cycle can be accepted by this instruction. The SIO[3:1] are don't care during SPI mode.

**Figure 53. Burst Read (SPI Mode)**

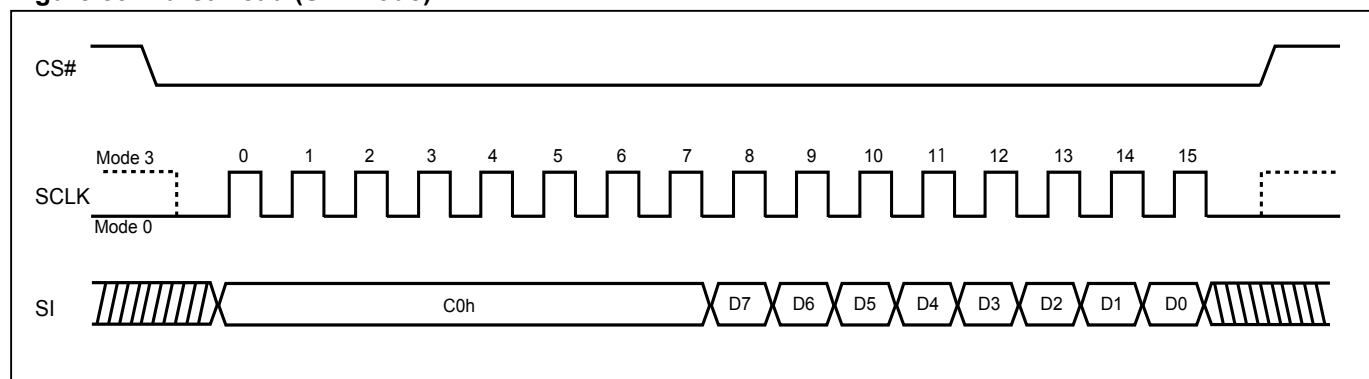

**Figure 54. Burst Read (QPI Mode)**

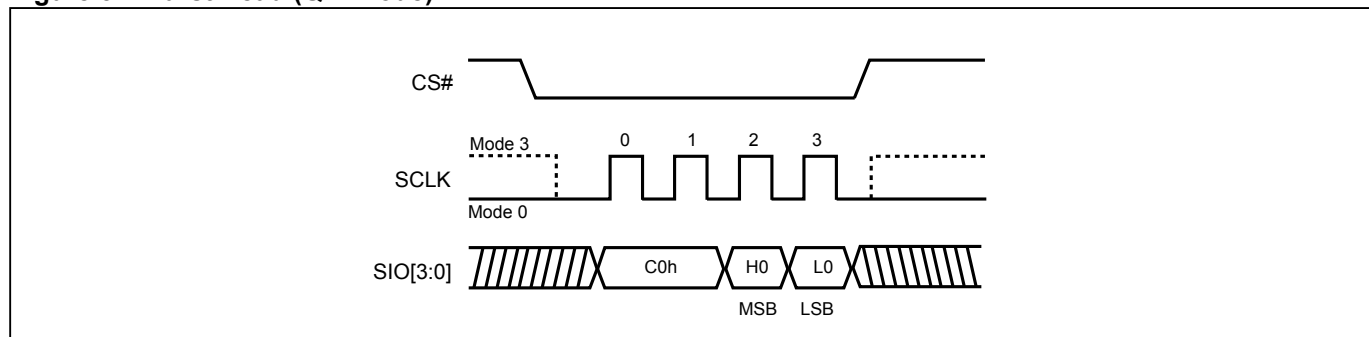

Note: MSB=Most Significant Bit  
LSB=Least Significant Bit

**9-23. Performance Enhance Mode - XIP (execute-in-place)**

The device could waive the command cycle bits if the two cycle bits after address cycle toggles.

Performance enhance mode is supported in both SPI and QPI mode.

In QPI mode, "EBh" "ECh" "EDh" "EEh" and SPI "EBh" "ECh" "EDh" "EEh" commands support enhance mode. The performance enhance mode is not supported in dual I/O mode.


To enter performance-enhancing mode, P[7:4] must be toggling with P[3:0]; likewise P[7:0]=A5h, 5Ah, F0h or 0Fh can make this mode continue and skip the next 4READ instruction. To leave enhance mode, P[7:4] is no longer toggling with P[3:0]; likewise P[7:0]=FFh, 00h, AAh or 55h along with CS# is afterwards raised and then lowered. Issuing "FFh" data cycle can also exit enhance mode. The system then will leave performance enhance mode and return to normal operation.

To conduct the Performance Enhance Mode Reset operation in SPI mode, FFh data cycle(8 clocks in 3-byte address mode)/3FFh data cycle(10 clocks in 4-byte address mode), should be issued in 1I/O sequence. In QPI Mode, FFFFFFFFh data cycle(8 clocks in 3-byte address mode)/FFFFFFFFh data cycle (10 clocks in 4-byte address mode), in 4I/O should be issued. If the system controller is being Reset during operation, the flash device will return to the standard SPI operation.

After entering enhance mode, following CS# go high, the device will stay in the read mode and treat CS# go low of the first clock as address instead of command cycle.

This sequence of issuing 4READ instruction especially useful in random access: CS# goes low→send 4READ instruction→3-bytes or 4-bytes address interleave on SIO3, SIO2, SIO1 & SIO0→performance enhance toggling bit P[7:0]→ 4 dummy cycles (Default) →data out until CS# goes high → CS# goes low (The following 4READ instruction is not allowed, hence 8 cycles of 4READ can be saved comparing to normal 4READ mode) → 3-bytes or 4-bytes random access address.


**Figure 55. 4 x I/O Read Performance Enhance Mode Sequence (SPI Mode)**

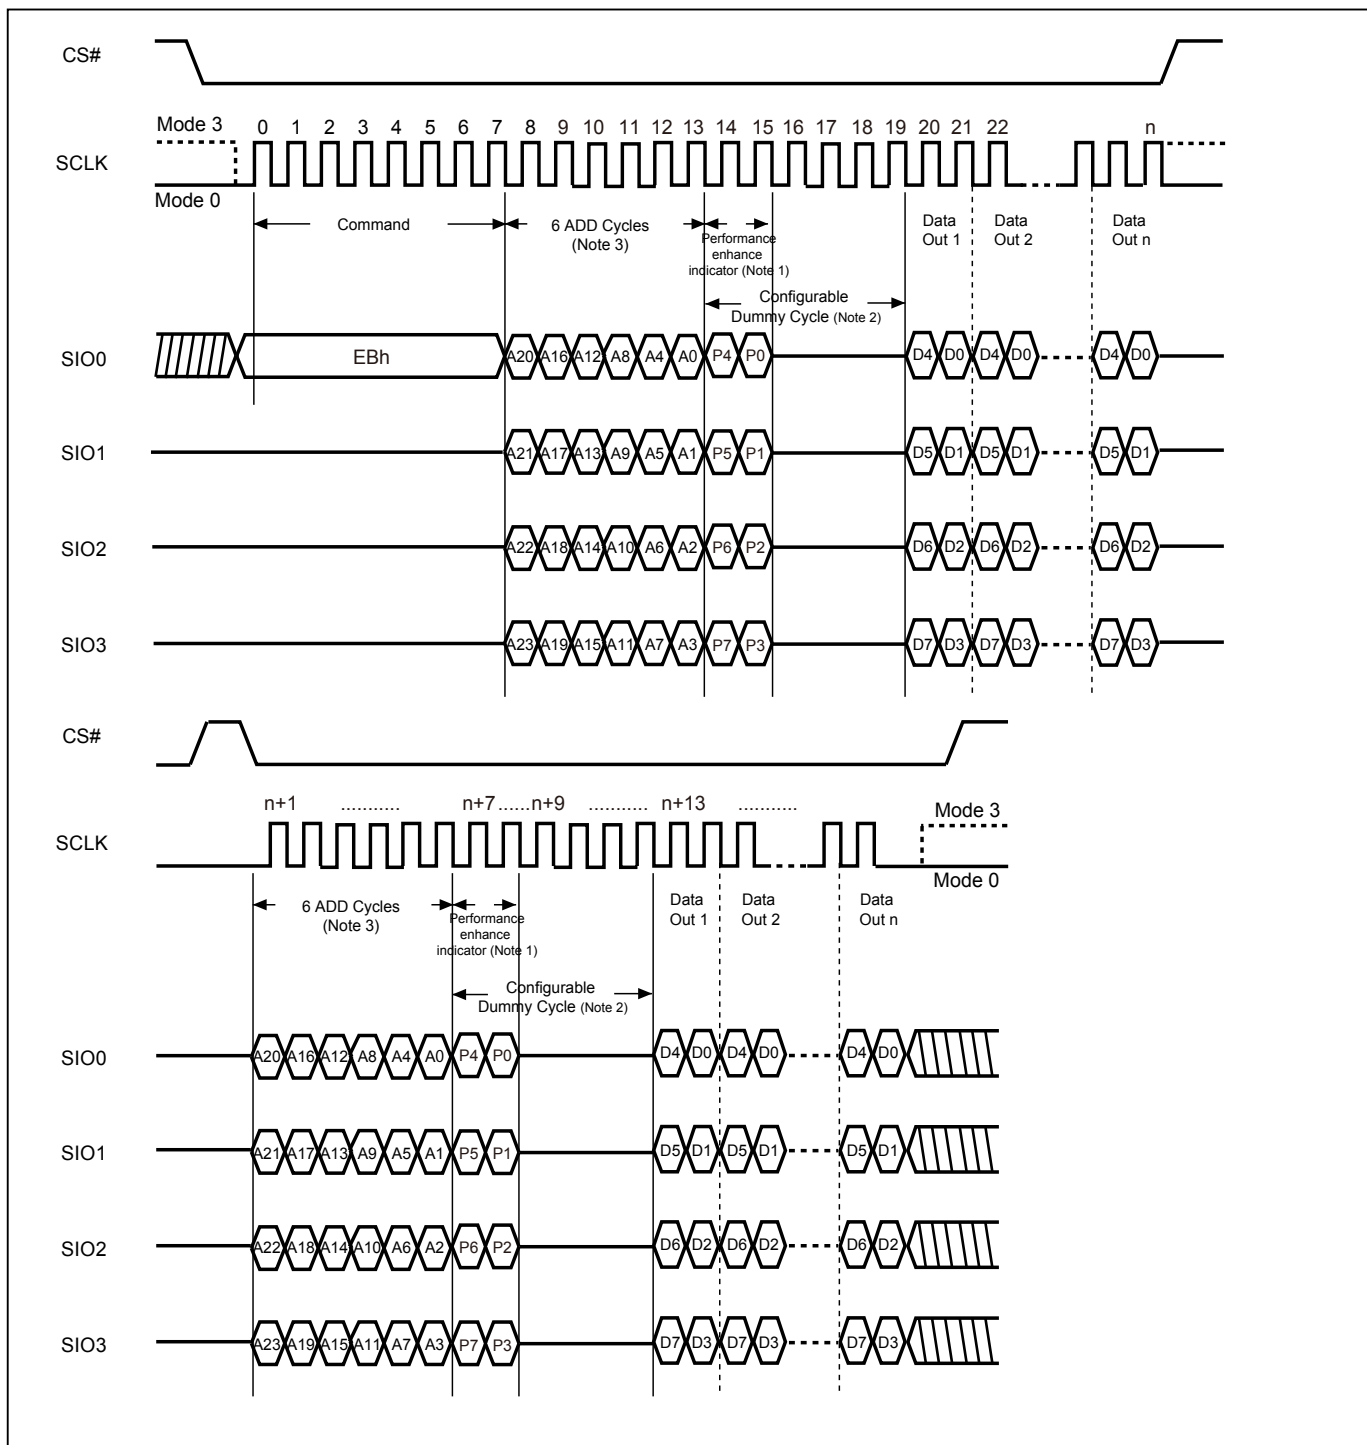

**Notes:**

1. If not using performance enhance recommend to keep 1 or 0 in performance enhance indicator.
2. Configuration Dummy cycle numbers will be different depending on the bit6 & bit 7 (DC0 & DC1) setting in configuration register.
3. Please note the address cycles above are based on 3-byte address mode. For 4-byte address mode, the address cycles will be increased.
4. Reset the performance enhance mode, if P7=P3 or P6=P2 or P5=P1 or P4=P0, ex: AA, 00, FF.

**Figure 56. 4 x I/O Read Performance Enhance Mode Sequence (QPI Mode)**

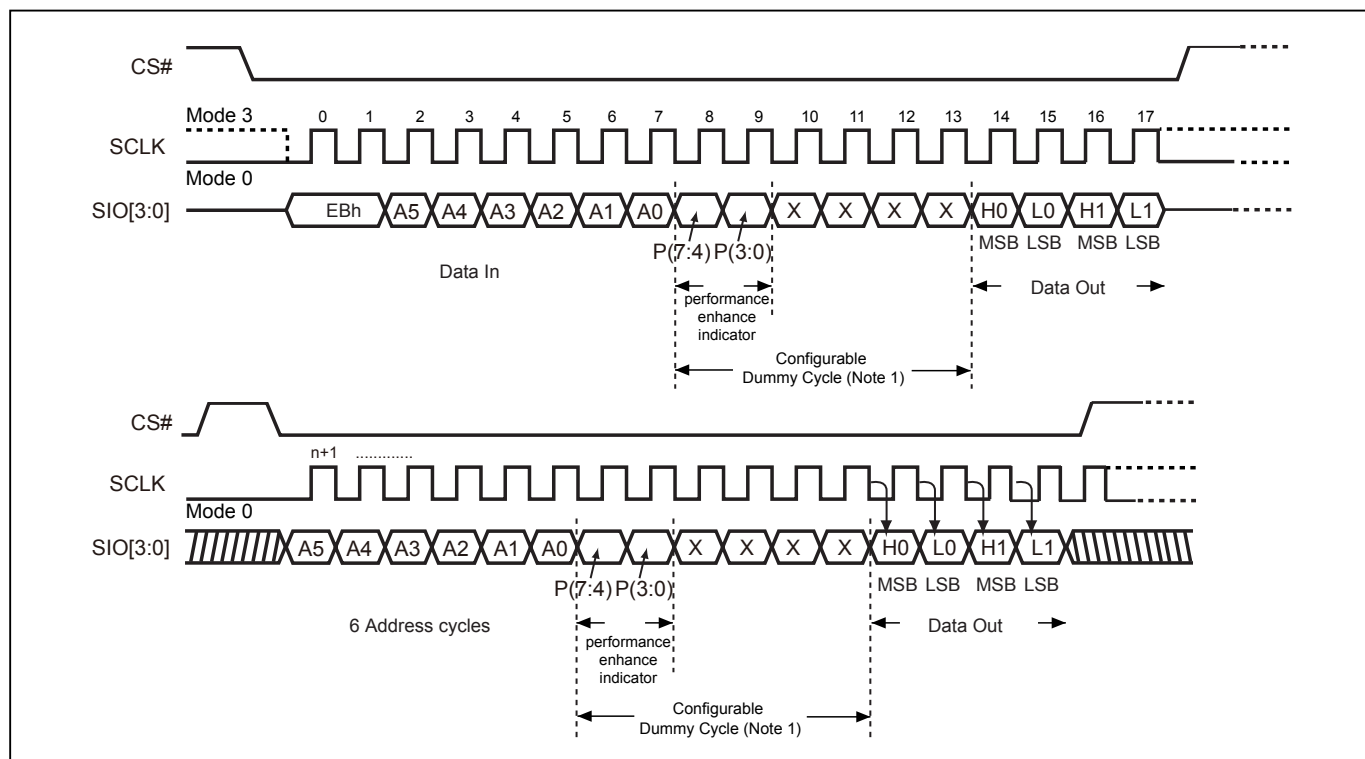

**Notes:**

1. Configuration Dummy cycle numbers will be different depending on the bit6 & bit 7 (DC0 & DC1) setting in configuration register.
2. Please note the address cycles above are based on 3-byte address mode. For 4-byte address mode, the address cycles will be increased.
3. Reset the performance enhance mode, if P7=P3 or P6=P2 or P5=P1 or P4=P0, ex: AA, 00, FF.

## 9-24. Sector Erase (SE)

The Sector Erase (SE) instruction is for erasing the data of the chosen sector to be "1". The instruction is used for any 4K-byte sector. A Write Enable (WREN) instruction must execute to set the Write Enable Latch (WEL) bit before sending the Sector Erase (SE). Any address of the sector (Please refer to "Table 4. Memory Organization") is a valid address for Sector Erase (SE) instruction. The CS# must go high exactly at the byte boundary (the least significant bit of the address byte been latched-in); otherwise, the instruction will be rejected and not executed.

The default read mode is 3-byte address, to access higher address (4-byte address) which requires to enter the 4-byte address read mode or to define EAR bit. Address bits [Am-A12] (Am is the most significant address) select the sector address.


To enter the 4-byte address mode, please refer to "9-11. Enter 4-byte mode (EN4B)" section.

The sequence of issuing SE instruction is: CS# goes low→ sending SE instruction code→ 3-byte or 4-byte address on SI→ CS# goes high.

Both SPI (8 clocks) and QPI (2 clocks) command cycle can accept by this instruction. The SIO[3:1] are don't care when during SPI mode.


The self-timed Sector Erase Cycle time (tSE) is initiated as soon as Chip Select (CS#) goes high. The Write in Progress (WIP) bit still can be checked while the Sector Erase cycle is in progress. The WIP sets 1 during the tSE timing, and clears when Sector Erase Cycle is completed, and the Write Enable Latch (WEL) bit is cleared. If the Block is protected by BP bits (WPSEL=0; Block Protect Mode) or SPB (WPSEL=1; Individual Sector Protect Mode), the Sector Erase (SE) instruction will not be executed on the block.

**Figure 57. Sector Erase (SE) Sequence (SPI Mode)**

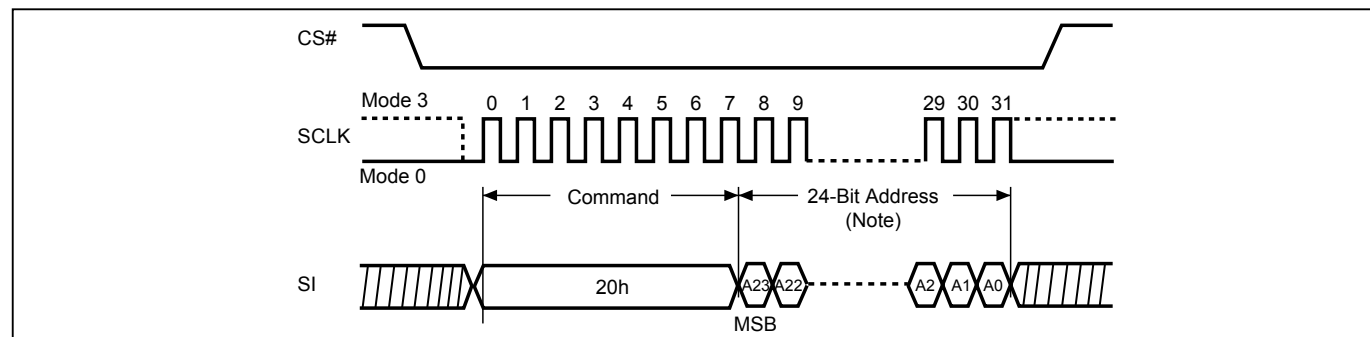

**Note:** Please note the address cycles above are based on 3-byte address mode. For 4-byte address mode, the address cycles will be increased.

**Figure 58. Sector Erase (SE) Sequence (QPI Mode)**

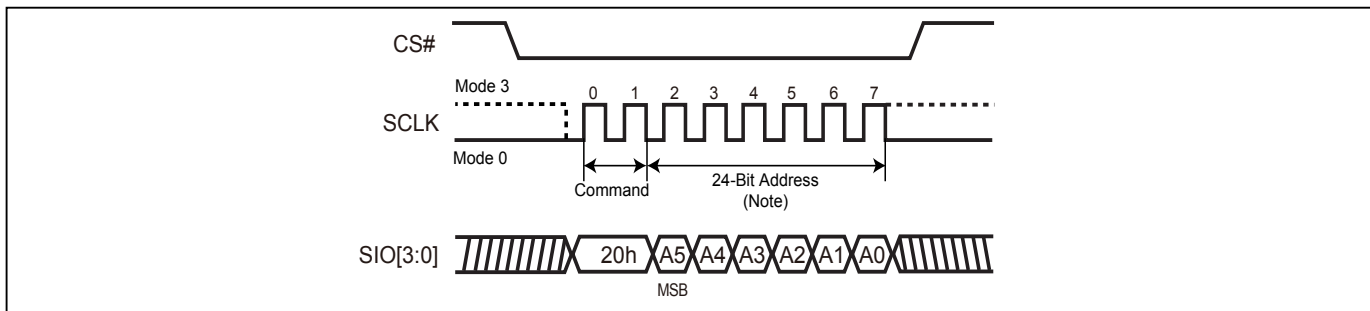

**Note:** Please note the address cycles above are based on 3-byte address mode. For 4-byte address mode, the address cycles will be increased.

## 9-25. Block Erase (BE32K)

The Block Erase (BE32K) instruction is for erasing the data of the chosen block to be "1". The instruction is used for 32K-byte block erase operation. A Write Enable (WREN) instruction be executed to set the Write Enable Latch (WEL) bit before sending the Block Erase (BE32K). Any address of the block (Please refer to ["Table 4. Memory Organization"](#)) is a valid address for Block Erase (BE32K) instruction. The CS# must go high exactly at the byte boundary (the least significant bit of address byte been latched-in); otherwise, the instruction will be rejected and not executed.


Address bits [Am-A15] (Am is the most significant address) select the 32KB block address. The default read mode is 3-byte address, to access higher address (4-byte address) which requires to enter the 4-byte address read mode or to define EAR bit. To enter the 4-byte address mode, please refer to ["9-11. Enter 4-byte mode \(EN4B\)"](#) section.

The sequence of issuing BE32K instruction is: CS# goes low→ sending BE32K instruction code→ 3-byte or 4-byte address on SI→CS# goes high.

Both SPI (8 clocks) and QPI (2 clocks) command cycle can accept by this instruction. The SIO[3:1] are don't care when during SPI mode.


The self-timed Block Erase Cycle time (tBE32K) is initiated as soon as Chip Select (CS#) goes high. The Write in Progress (WIP) bit still can be checked while during the Block Erase cycle is in progress. The WIP sets during the tBE32K timing, and clears when Block Erase Cycle is completed, and the Write Enable Latch (WEL) bit is cleared. If the Block is protected by BP bits (WPSEL=0; Block Protect Mode) or SPB (WPSEL=1; Individual Sector Protect Mode), the Block Erase (BE32K) instruction will not be executed on the block.

**Figure 59. Block Erase 32KB (BE32K) Sequence (SPI Mode)**

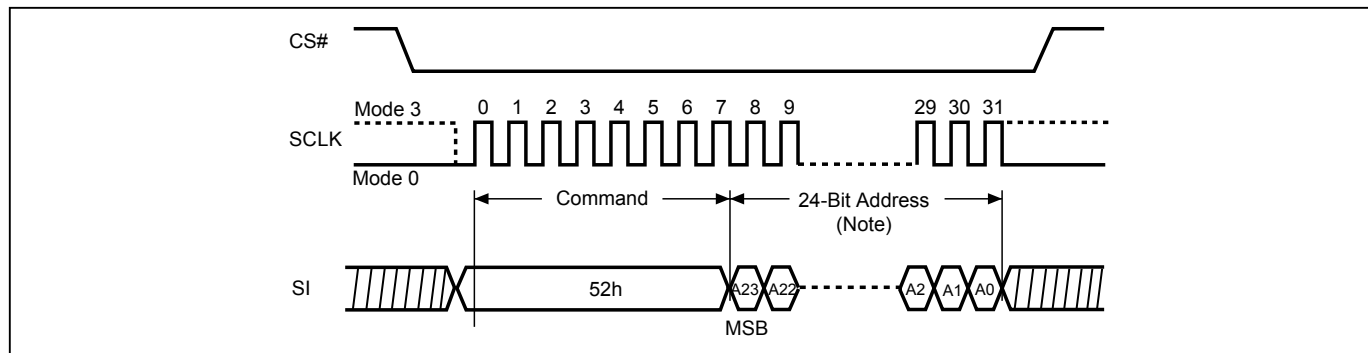

**Note:** Please note the address cycles above are based on 3-byte address mode. For 4-byte address mode, the address cycles will be increased.

**Figure 60. Block Erase 32KB (BE32K) Sequence (QPI Mode)**

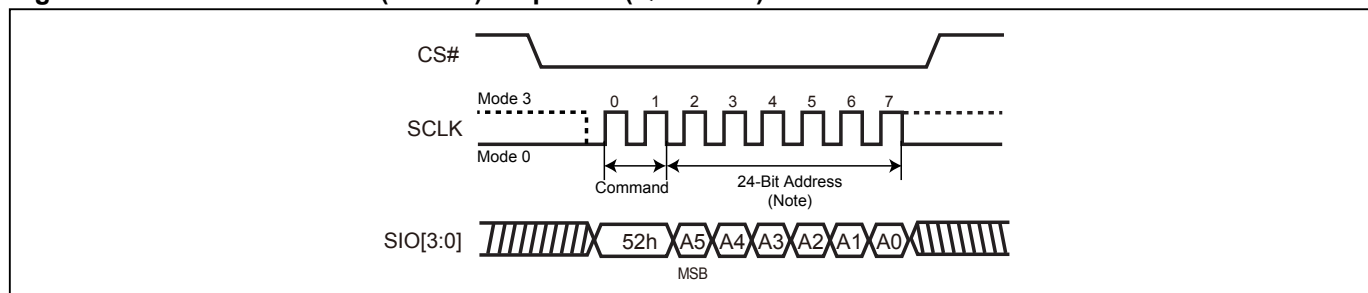

**Note:** Please note the address cycles above are based on 3-byte address mode. For 4-byte address mode, the address cycles will be increased.

## 9-26. Block Erase (BE)

The Block Erase (BE) instruction is for erasing the data of the chosen block to be "1". The instruction is used for 64K-byte block erase operation. A Write Enable (WREN) instruction must be executed to set the Write Enable Latch (WEL) bit before sending the Block Erase (BE). Any address of the block (Please refer to ["Table 4. Memory Organization"](#)) is a valid address for Block Erase (BE) instruction. The CS# must go high exactly at the byte boundary (the least significant bit of address byte been latched-in); otherwise, the instruction will be rejected and not executed.


The default read mode is 3-byte address, to access higher address (4-byte address) which requires to enter the 4-byte address read mode or to define EAR bit. To enter the 4-byte address mode, please refer to the ["9-11. Enter 4-byte mode \(EN4B\)"](#) Mode section.

The sequence of issuing BE instruction is: CS# goes low → sending BE instruction code → 3-byte or 4-byte address on SI → CS# goes high.

Both SPI (8 clocks) and QPI (2 clocks) command cycle can accept by this instruction. The SIO[3:1] are don't care when during SPI mode.


The self-timed Block Erase Cycle time (tBE) is initiated as soon as Chip Select (CS#) goes high. The Write in Progress (WIP) bit still can be checked while the Block Erase cycle is in progress. The WIP sets during the tBE timing, and clears when Block Erase Cycle is completed, and the Write Enable Latch (WEL) bit is reset. If the Block is protected by BP bits (WPSEL=0; Block Protect Mode) or SPB (WPSEL=1; Individual Sector Protect Mode), the Block Erase (BE) instruction will not be executed on the block.

**Figure 61. Block Erase (BE) Sequence (SPI Mode)**

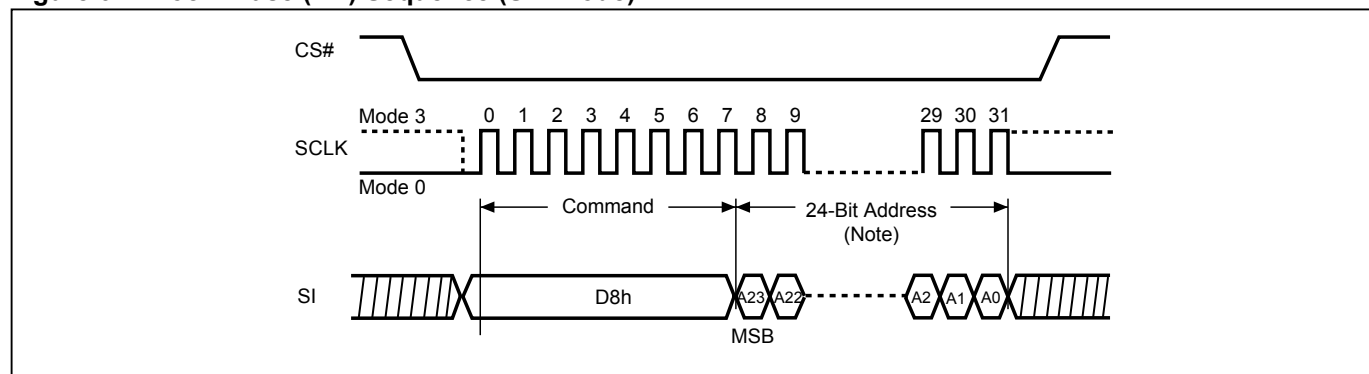

**Note:** Please note the address cycles above are based on 3-byte address mode. For 4-byte address mode, the address cycles will be increased.

**Figure 62. Block Erase (BE) Sequence (QPI Mode)**

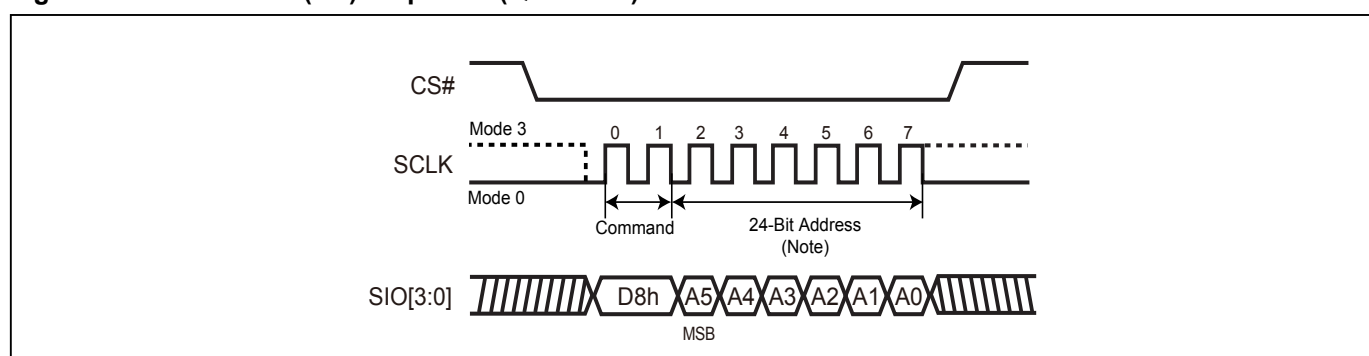

**Note:** Please note the address cycles above are based on 3-byte address mode. For 4-byte address mode, the address cycles will be increased.

## 9-27. Chip Erase (CE)

The Chip Erase (CE) instruction is for erasing the data of the whole chip to be "1". A Write Enable (WREN) instruction must be executed to set the Write Enable Latch (WEL) bit before sending the Chip Erase (CE). The CS# must go high exactly at the byte boundary, otherwise the instruction will be rejected and not executed.

The sequence of issuing CE instruction is: CS# goes low→sending CE instruction code→CS# goes high.


Both SPI (8 clocks) and QPI (2 clocks) command cycle can accept by this instruction. The SIO[3:1] are don't care when during SPI mode.

The self-timed Chip Erase Cycle time ( $t_{CE}$ ) is initiated as soon as Chip Select (CS#) goes high. The Write in Progress (WIP) bit still can be checked while the Chip Erase cycle is in progress. The WIP sets during the  $t_{CE}$  timing, and clears when Chip Erase Cycle is completed, and the Write Enable Latch (WEL) bit is cleared.


When the chip is under "Block protect (BP) Mode" (WPSEL=0). The Chip Erase (CE) instruction will not be executed, if one (or more) sector is protected by BP3-BP0 bits. It will be only executed when BP3-BP0 all set to "0".

When the chip is under "Advances Sector Protect Mode" (WPSEL=1). The Chip Erase (CE) instruction will be executed on unprotected block. The protected Block will be skipped. If one (or more) 4K byte sector was protected in top or bottom 64K byte block, the protected block will also skip the chip erase command.

**Figure 63. Chip Erase (CE) Sequence (SPI Mode)**

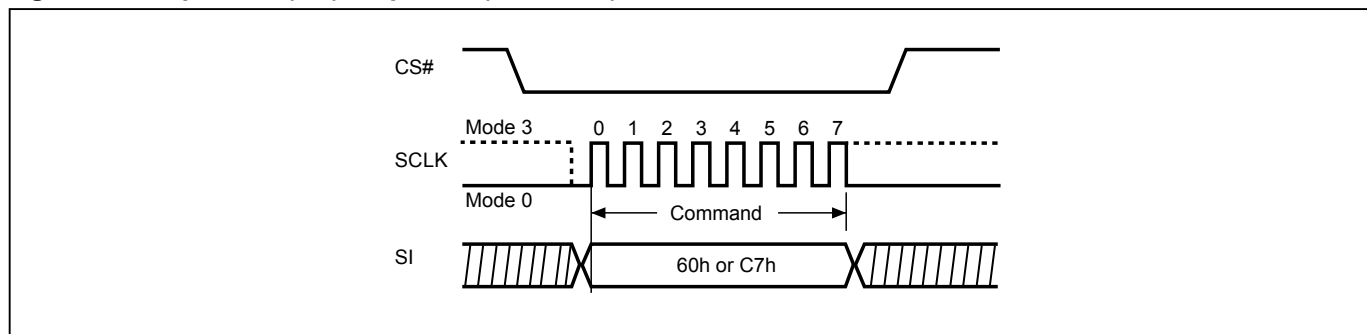

**Figure 64. Chip Erase (CE) Sequence (QPI Mode)**

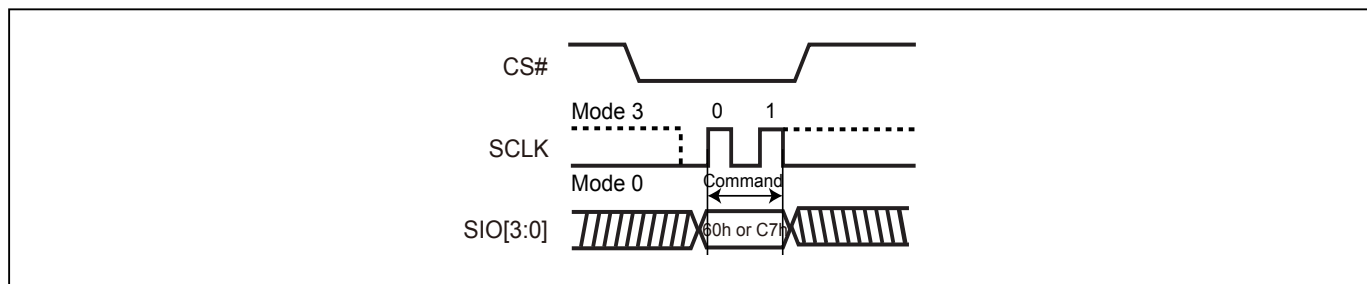

## 9-28. Page Program (PP)

The Page Program (PP) instruction is for programming memory bits to "0". One to 256 bytes can be sent to the device to be programmed. A Write Enable (WREN) instruction must be executed to set the Write Enable Latch (WEL) bit before sending the Page Program (PP). If more than 256 data bytes are sent to the device, only the last 256 data bytes will be accepted and the previous data bytes will be disregarded. The Page Program instruction requires that all the data bytes fall within the same 256-byte page. The low order address byte A[7:0] specifies the starting address within the selected page. Bytes that will cross a page boundary will wrap to the beginning of the selected page. The device can accept (256 minus A[7:0]) data bytes without wrapping. If 256 data bytes are going to be programmed, A[7:0] should be set to 0.

The default read mode is 3-byte address, to access higher address (4-byte address) which requires to enter the 4-byte address read mode or to define EAR bit. To enter the 4-byte address mode, please refer to ["9-11. Enter 4-byte mode \(EN4B\)"](#) section.


The sequence of issuing PP instruction is: CS# goes low→ sending PP instruction code→ 3-byte or 4-byte address on SI→ at least 1-byte on data on SI→ CS# goes high.

The CS# must be kept to low during the whole Page Program cycle; The CS# must go high exactly at the byte boundary (the latest eighth bit of data being latched in), otherwise the instruction will be rejected and will not be executed.

The self-timed Page Program Cycle time (tPP) is initiated as soon as Chip Select (CS#) goes high. The Write in Progress (WIP) bit still can be checked while the Page Program cycle is in progress. The WIP sets during the tPP timing, and clears when Page Program Cycle is completed, and the Write Enable Latch (WEL) bit is cleared. If the page is protected by BP bits (WPSEL=0; Block Protect Mode) or SPB (WPSEL=1; Individual Sector Protect Mode), the Page Program (PP) instruction will not be executed.


Both SPI (8 clocks) and QPI (2 clocks) command cycle can accept by this instruction. The SIO[3:1] are don't care when during SPI mode.

**Figure 65. Page Program (PP) Sequence (SPI Mode)**

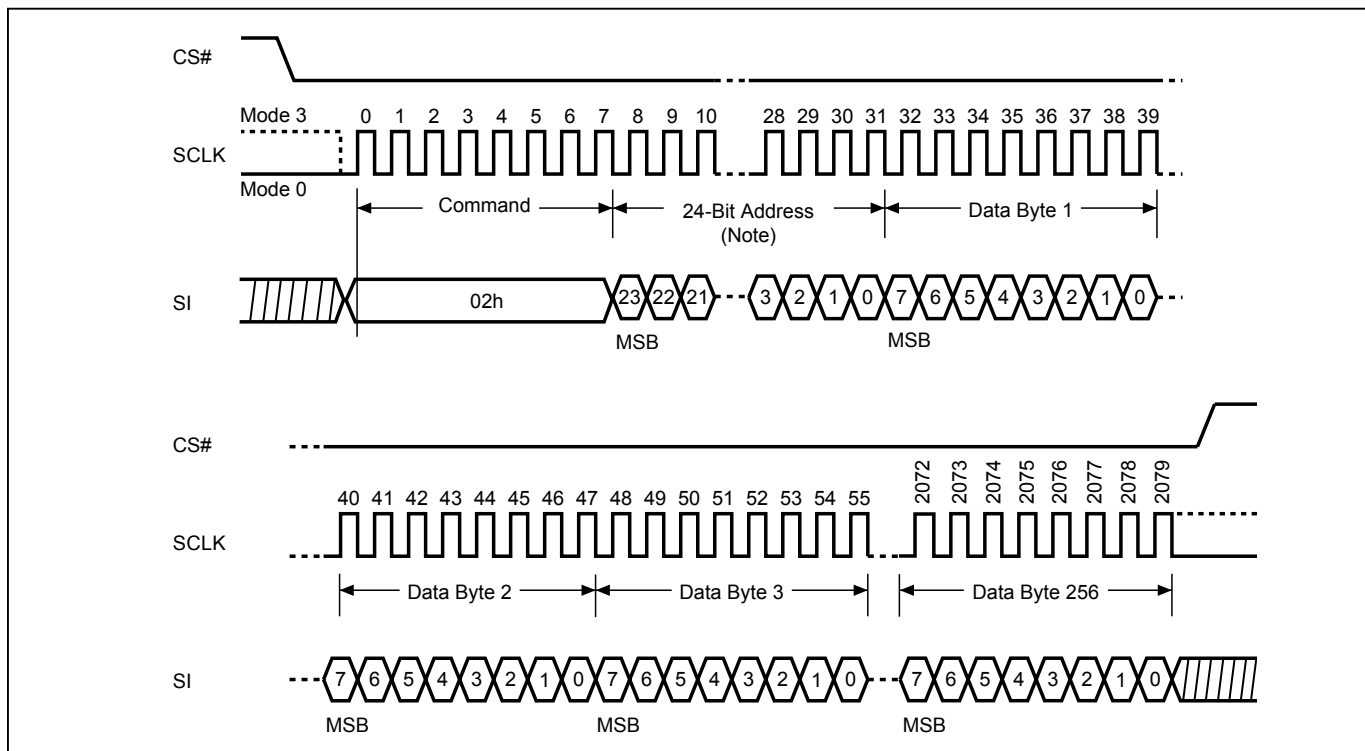

**Note:** Please note the address cycles above are based on 3-byte address mode. For 4-byte address mode, the address cycles will be increased.

**Figure 66. Page Program (PP) Sequence (QPI Mode)**

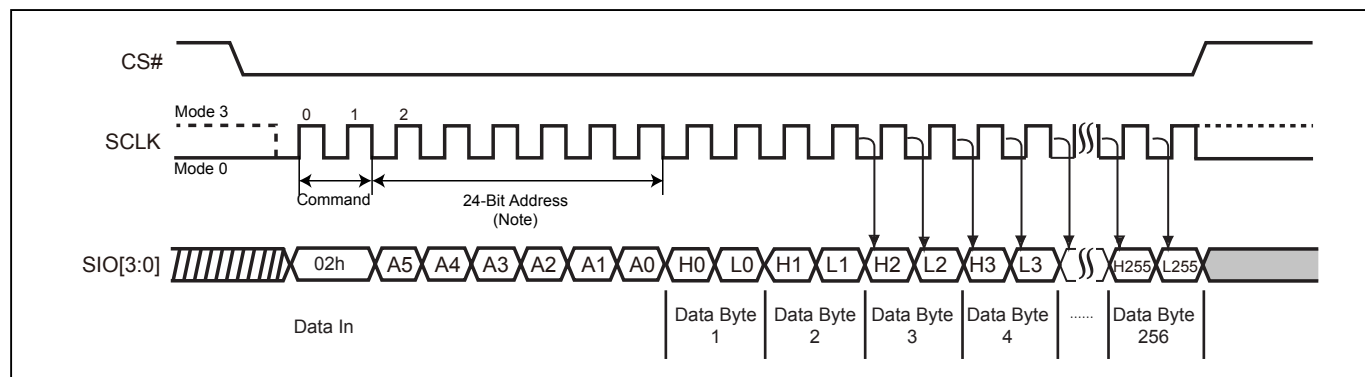

**Note:** Please note the address cycles above are based on 3-byte address mode. For 4-byte address mode, the address cycles will be increased.

## 9-29. 4 x I/O Page Program (4PP)


The Quad Page Program (4PP) instruction is for programming the memory to be "0". A Write Enable (WREN) instruction must be executed to set the Write Enable Latch (WEL) bit and Quad Enable (QE) bit must be set to "1" before sending the Quad Page Program (4PP). The Quad Page Programming takes four pins: SIO0, SIO1, SIO2, and SIO3 as address and data input, which can improve programmer performance and the effectiveness of application. The other function descriptions are as same as standard page program.

The default read mode is 3-byte address, to access higher address (4-byte address) which requires to enter the 4-byte address read mode or to define EAR bit. To enter the 4-byte address mode, please refer to the ["9-11. Enter 4-byte mode \(EN4B\)"](#) section.

The sequence of issuing 4PP instruction is: CS# goes low→ sending 4PP instruction code→ 3-byte or 4-byte address on SIO[3:0]→ at least 1-byte on data on SIO[3:0]→CS# goes high.

If the page is protected by BP bits (WPSEL=0; Block Protect Mode) or SPB (WPSEL=1; Individual Sector Protect Mode), the Quad Page Program (4PP) instruction will not be executed.

**Figure 67. 4 x I/O Page Program (4PP) Sequence (SPI Mode only)**

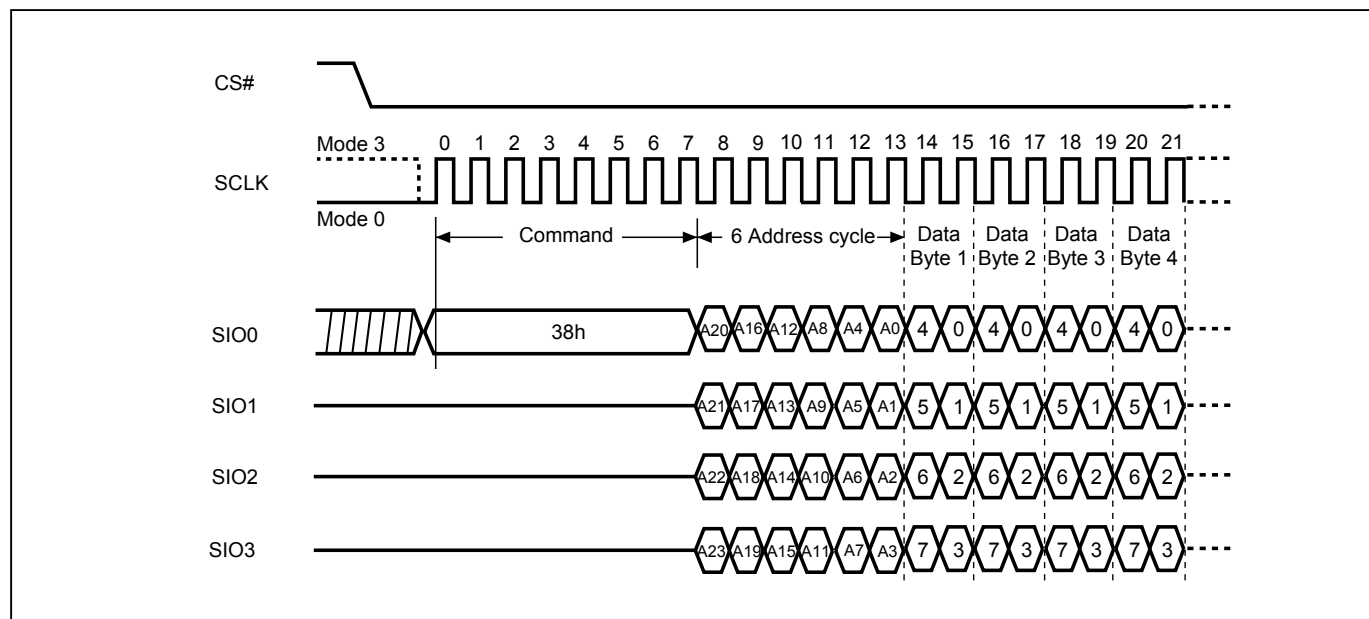

**Note:** Please note the address cycles above are based on 3-byte address mode. For 4-byte address mode, the address cycles will be increased.

### 9-30. Deep Power-down (DP)


The Deep Power-down (DP) instruction places the device into a minimum power consumption state, Deep Power-down mode, in which the quiescent current is reduced from ISB1 to ISB2.

The sequence of issuing DP instruction: CS# goes low→ send DP instruction code→ CS# goes high. The CS# must go high at the byte boundary (after exactly eighth bits of the instruction code have been latched-in); otherwise the instruction will not be executed. Both SPI (8 clocks) and QPI (2 clocks) command cycle can be accepted by this instruction. SIO[3:1] are "don't care".


After CS# goes high there is a delay of  $t_{DP}$  before the device transitions from Stand-by mode to Deep Power-down mode and before the current reduces from ISB1 to ISB2. Once in Deep Power-down mode, all instructions will be ignored except Release from Deep Power-down (RDP).

The device exits Deep Power-down mode and returns to Stand-by mode if it receives a Release from Deep Power-down (RDP) instruction, power-cycle, or reset.

**Figure 68. Deep Power-down (DP) Sequence (SPI Mode)**

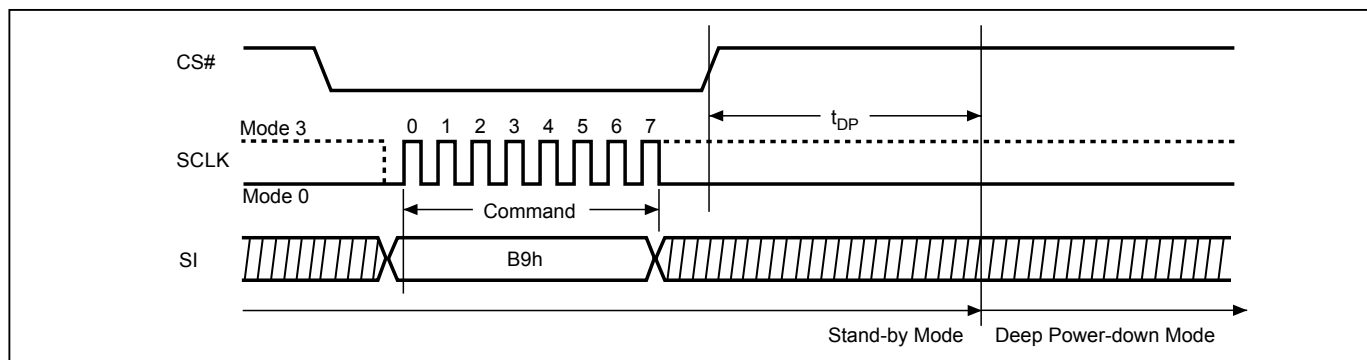

**Figure 69. Deep Power-down (DP) Sequence (QPI Mode)**

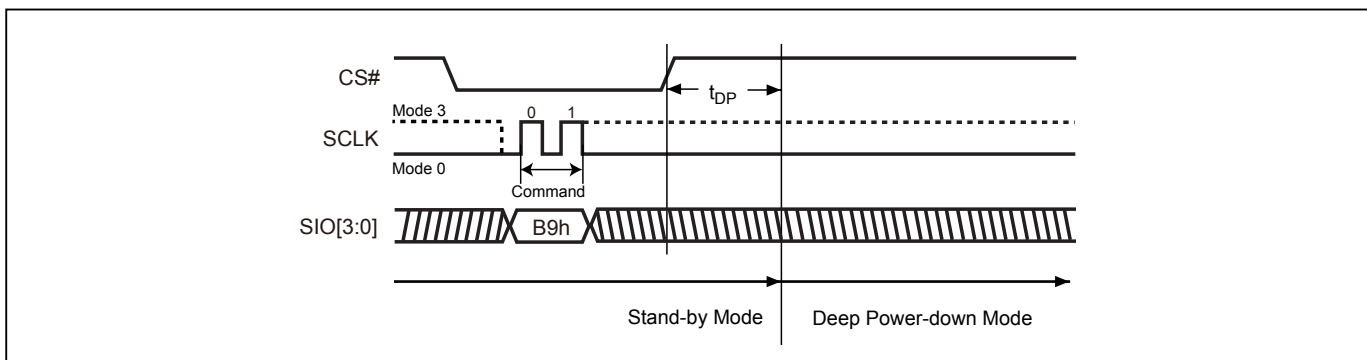

**9-31. Enter Secured OTP (ENSO)**

The ENSO instruction is for entering the additional 4K-bit secured OTP mode. While device is in 4K-bit secured OTP mode, main array access is not available. The additional 4K-bit secured OTP is independent from main array and may be used to store unique serial number for system identifier. After entering the Secured OTP mode, follow standard read or program procedure to read out the data or update data. The Secured OTP data cannot be updated again once it is lock-down.

The sequence of issuing ENSO instruction is: CS# goes low→ send ENSO instruction to enter Secured OTP mode→ CS# goes high.

Both SPI (8 clocks) and QPI (2 clocks) command cycle can accept by this instruction. The SIO[3:1] are don't care when during SPI mode.

Please note that after issuing ENSO command user can only access secure OTP region with standard read or program procedure. Furthermore, once security OTP is lock down, only read related commands are valid.

**9-32. Exit Secured OTP (EXSO)**

The EXSO instruction is for exiting the additional 4K-bit secured OTP mode.

The sequence of issuing EXSO instruction is: CS# goes low→ send EXSO instruction to exit Secured OTP mode→ CS# goes high.

Both SPI (8 clocks) and QPI (2 clocks) command cycle can accept by this instruction. The SIO[3:1] are don't care when during SPI mode.

### 9-33. Write Security Register (WRSCUR)


The WRSCUR instruction is for changing the values of Security Register Bits. The WREN (Write Enable) instruction is required before issuing WRSCUR instruction. The WRSCUR instruction may change the values of bit1 (LDSO bit) for customer to lock-down the 4K-bit Secured OTP area. Once the LDSO bit is set to "1", the Secured OTP area cannot be updated any more.

The sequence of issuing WRSCUR instruction is :CS# goes low→ send WRSCUR instruction → CS# goes high.


Both SPI (8 clocks) and QPI (2 clocks) command cycle can be accepted by this instruction. The SIO[3:1] are don't care during SPI mode.

The CS# must go high exactly at the boundary; otherwise, the instruction will be rejected and not executed.

**Figure 70. Write Security Register (WRSCUR) Sequence (SPI Mode)**

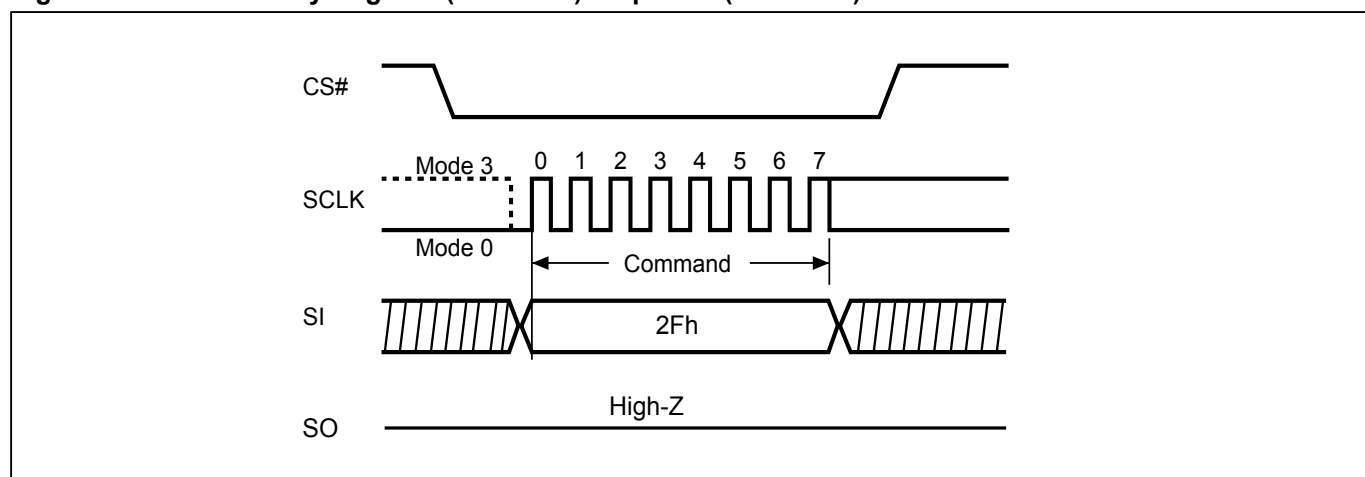

**Figure 71. Write Security Register (WRSCUR) Sequence (QPI Mode)**

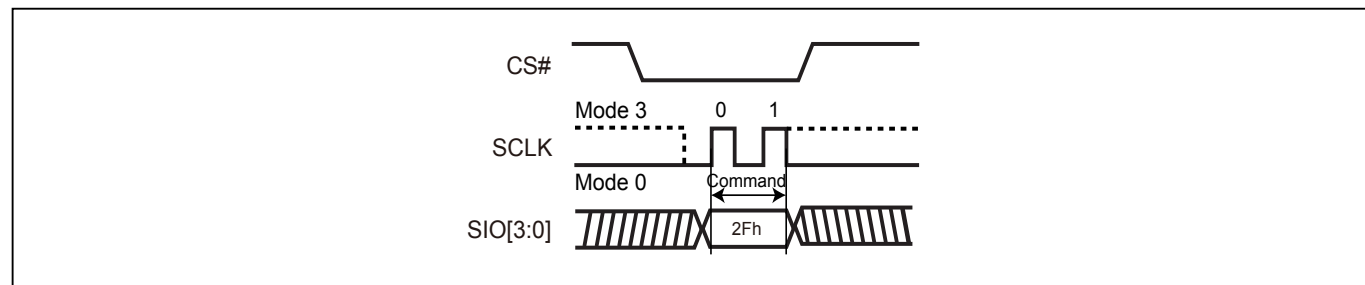


### 9-34. Read Security Register (RDSCUR)

The RDSCUR instruction is for reading the value of Security Register bits. The Read Security Register can be read at any time (even in program/erase/write status register/write security register condition) and continuously.


The sequence of issuing RDSCUR instruction is : CS# goes low→send RDSCUR instruction→Security Register data out on SO→ CS# goes high.

Both SPI (8 clocks) and QPI (2 clocks) command cycle can be accepted by this instruction. The SIO[3:1] are don't care during SPI mode.

### Figure 72. Read Security Register (RDSCUR) Sequence (SPI Mode)

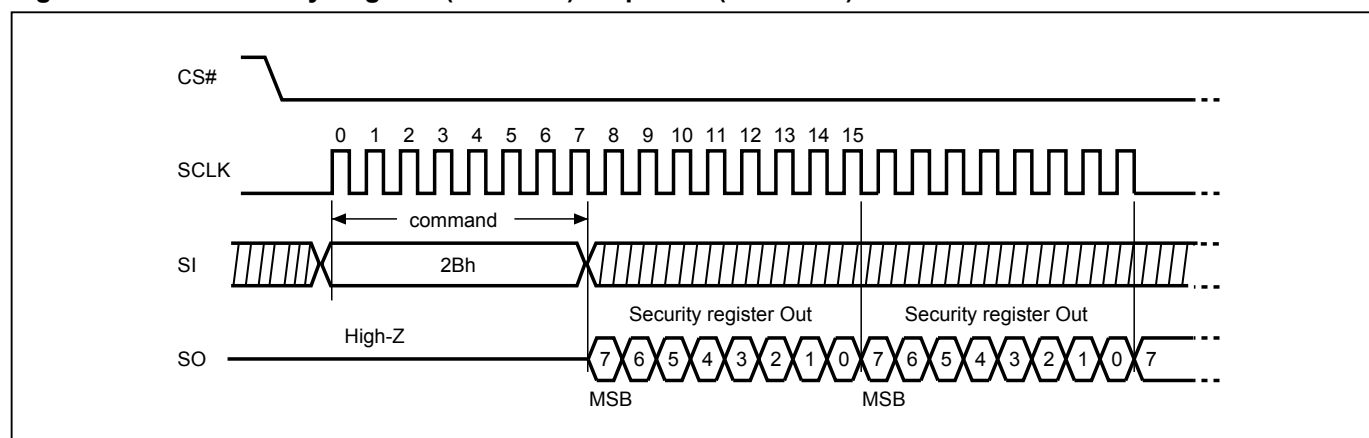

### Figure 73. Read Security Register (RDSCUR) Sequence (QPI Mode)

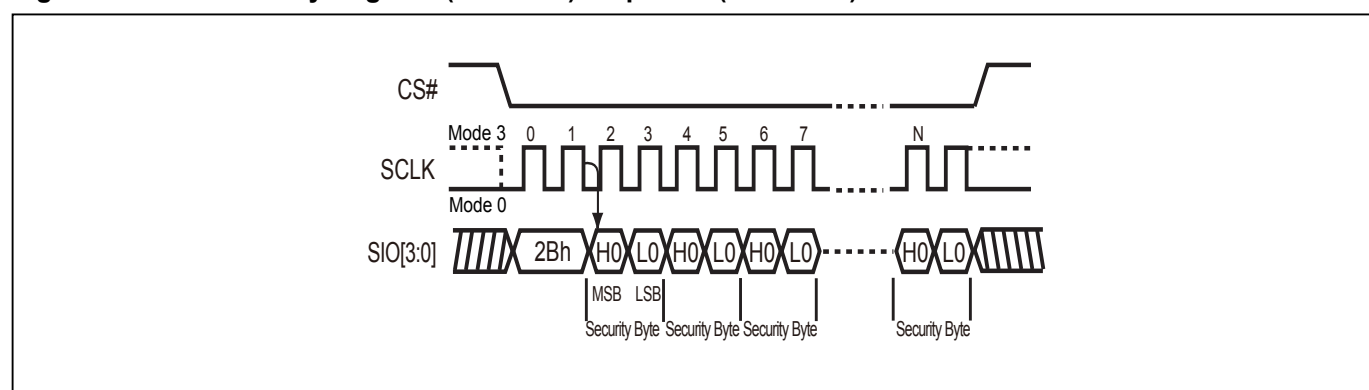

## Security Register

The definition of the Security Register bits is as below:

**Write Protection Selection bit.** Please reference to ["9-35. Write Protection Selection \(WPSEL\)"](#).

**Erase Fail bit.** The Erase Fail bit indicates the status of last Erase operation. The bit will be set to "1" if the erase operation failed or the erase region is protected. It will be automatically cleared to "0" if the next erase operation succeeds. Please note that it does not interrupt or stop any operation in the flash memory.

**Program Fail bit.** The Program Fail bit indicates the status of last Program operation. The bit will be set to "1" if the program operation failed or the program region is protected. It will be automatically cleared to "0" if the next program operation succeeds. Please note that it does not interrupt or stop any operation in the flash memory.

**Erase Suspend bit.** Erase Suspend Bit (ESB) indicates the status of Erase Suspend operation. Users may use ESB to identify the state of flash memory. After the flash memory is suspended by Erase Suspend command, ESB is set to "1". ESB is cleared to "0" after erase operation resumes.

**Program Suspend bit.** Program Suspend Bit (PSB) indicates the status of Program Suspend operation. Users may use PSB to identify the state of flash memory. After the flash memory is suspended by Program Suspend command, PSB is set to "1". PSB is cleared to "0" after program operation resumes.

**Secured OTP Indicator bit.** The Secured OTP indicator bit shows the secured OTP area is locked by factory or not. When it is "0", it indicates non-factory lock; "1" indicates factory-lock.

**Lock-down Secured OTP (LDSO) bit.** By writing WRSCUR instruction, the LDSO bit may be set to "1" for customer lock-down purpose. However, once the bit is set to "1" (lock-down), the LDSO bit and the 4K-bit Secured OTP area cannot be updated any more. While it is in 4K-bit secured OTP mode, main array access is not allowed.

**Table 12. Security Register Definition**

| bit7                                                                                                   | bit6                                                                      | bit5                                                                             | bit4         | bit3                                                                   | bit2                                                                       | bit1                                                                           | bit0                                               |
|--------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|----------------------------------------------------------------------------------|--------------|------------------------------------------------------------------------|----------------------------------------------------------------------------|--------------------------------------------------------------------------------|----------------------------------------------------|
| WPSEL                                                                                                  | E_FAIL                                                                    | P_FAIL                                                                           | Reserved     | ESB<br>(Erase<br>Suspend bit)                                          | PSB<br>(Program<br>Suspend bit)                                            | LDSO<br>(indicate if<br>lock-down)                                             | Secured OTP<br>indicator bit                       |
| 0=Block Lock<br>(BP) protection<br>mode<br>1=Individual<br>Sector<br>protection<br>mode<br>(default=0) | 0=normal<br>Erase<br>succeed<br>1=indicate<br>Erase failed<br>(default=0) | 0=normal<br>Program<br>succeed<br>1=indicate<br>Program<br>failed<br>(default=0) | -            | 0=Erase<br>is not<br>suspended<br>1= Erase<br>suspended<br>(default=0) | 0=Program<br>is not<br>suspended<br>1= Program<br>suspended<br>(default=0) | 0 = not lock-<br>down<br>1 = lock-down<br>(cannot<br>program/<br>erase<br>OTP) | 0 = non-<br>factory<br>lock<br>1 = factory<br>lock |
| Non-volatile bit<br>(OTP)                                                                              | Volatile bit                                                              | Volatile bit                                                                     | Volatile bit | Volatile bit                                                           | Volatile bit                                                               | Non-volatile<br>bit<br>(OTP)                                                   | Non-volatile<br>bit (OTP)                          |

### 9-35. Write Protection Selection (WPSEL)

There are two write protection methods provided on this device, (1) Block Protection (BP) mode or (2) Individual Sector Protection mode. The protection modes are mutually exclusive. The WPSEL bit selects which protection mode is enabled. If WPSEL=0 (factory default), BP mode is enabled and Individual Sector Protection mode is disabled. If WPSEL=1, Individual Sector Protection mode is enabled and BP mode is disabled. The WPSEL command is used to set WPSEL=1. A WREN command must be executed to set the WEL bit before sending the WPSEL command. Please note that the WPSEL bit is an OTP bit. Once WPSEL is set to "1", it cannot be programmed back to "0".

#### When WPSEL = 0: Block Lock (BP) protection mode.


The memory array is write protected by the BP3~BP0 bits.


#### When WPSEL =1: Individual Sector protection mode.

Blocks are individually protected by their own SPB or DPB. On power-up, all blocks are write protected by the Dynamic Protection Bits (DPB) by default. The Individual Sector Protection instructions WRLR, RDLR, WRSPB, ESSPB, WRDPB, RDDPB, GBLK, and GBULK are activated. The BP3~BP0 bits of the Status Register are disabled and have no effect. Hardware protection is performed by driving WP#=0. Once WP#=0 all blocks and sectors are write protected regardless of the state of each SPB or DPB.

The sequence of issuing WPSEL instruction is: CS# goes low → send WPSEL instruction to enable the Individual Sector Protect mode → CS# goes high.

**Figure 74. Write Protection Selection**

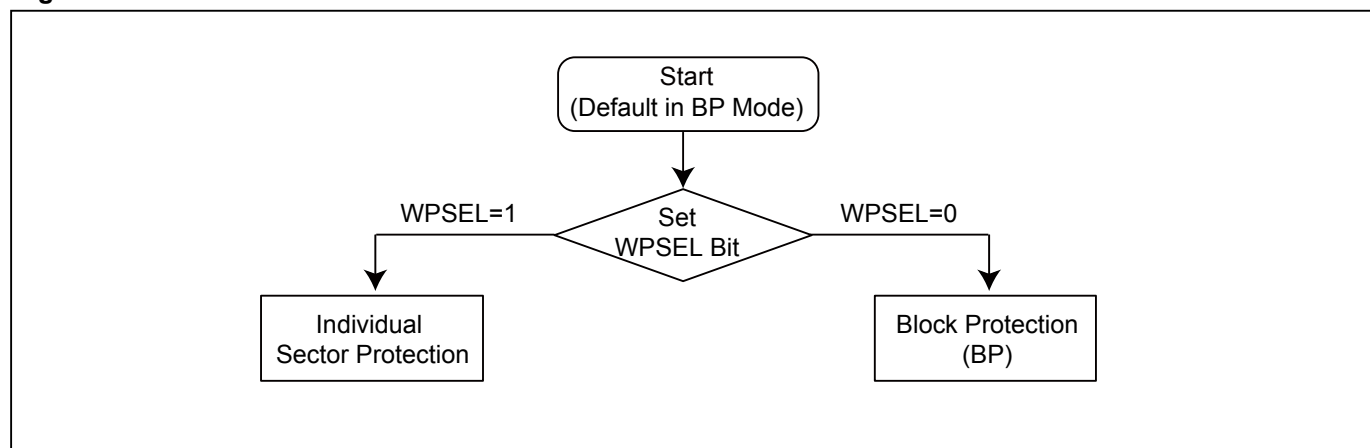

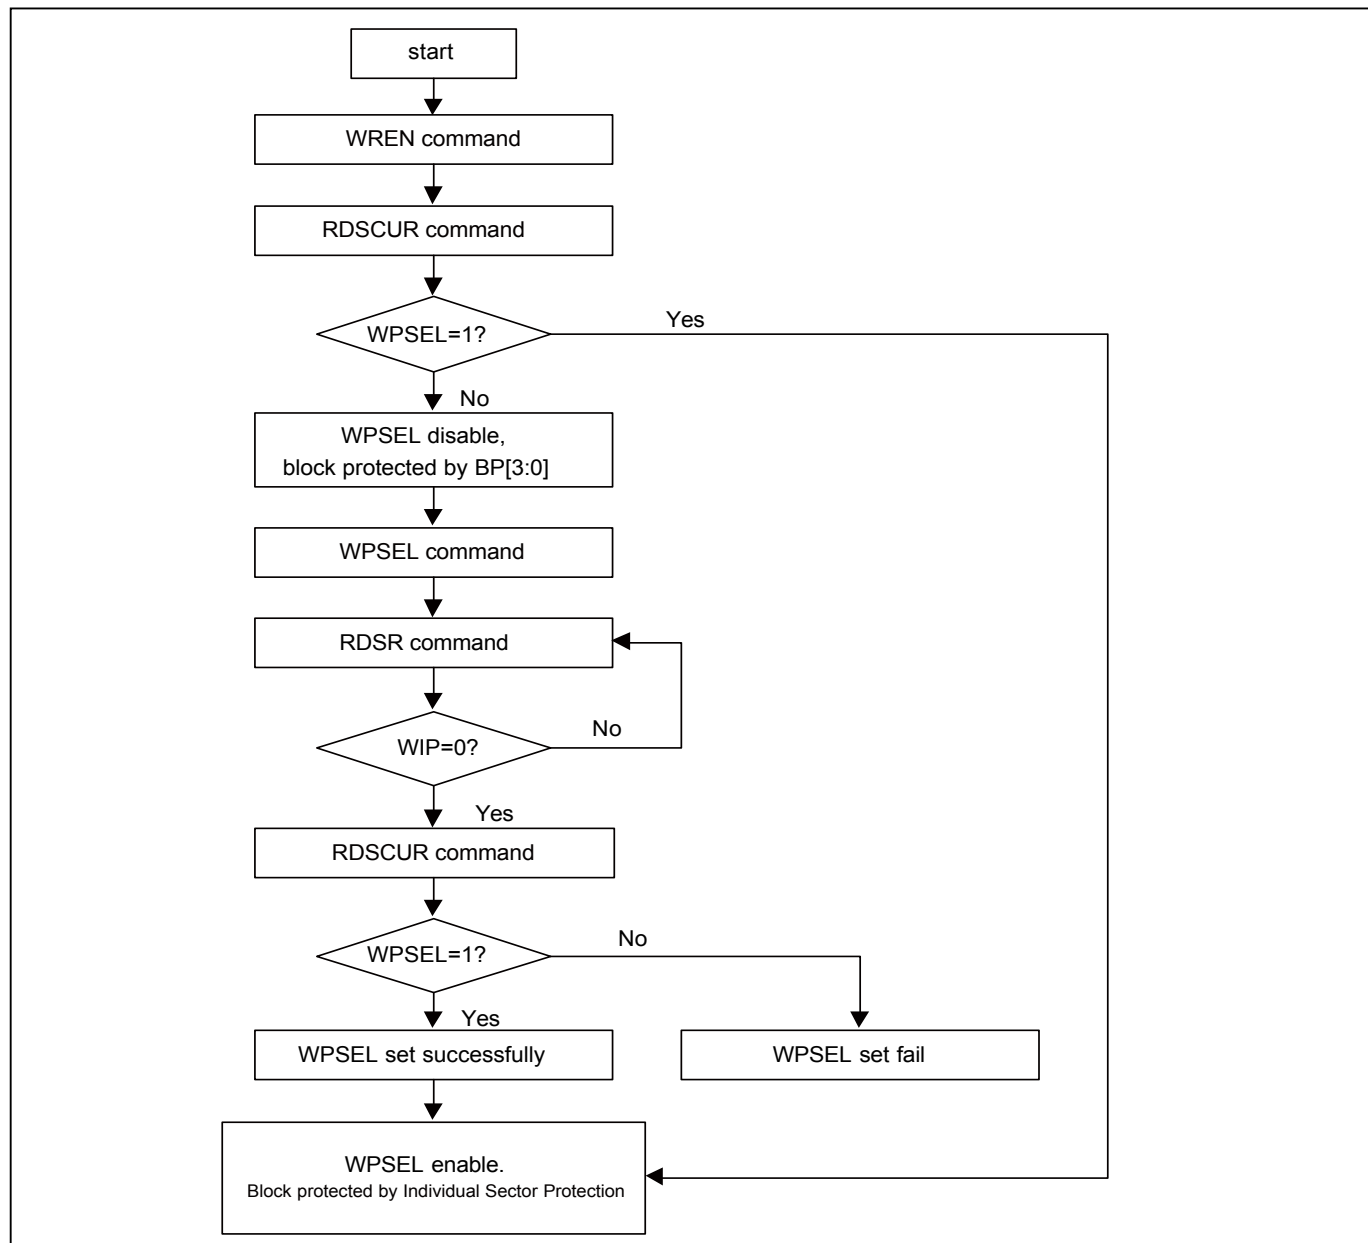**Figure 75. WPSEL Flow**

### 9-36. Advanced Sector Protection


Advanced Sector Protection can protect individual 4KB sectors in the bottom and top 64KB of memory and protect individual 64KB blocks in the rest of memory.

There is one non-volatile Solid Protection Bit (SPB) and one volatile Dynamic Protection Bit (DPB) assigned to each 4KB sector at the bottom and top 64KB of memory and to each 64KB block in the rest of memory. A sector or block is write-protected from programming or erasing when its associated SPB or DPB is set to “1”. The Unprotect Solid Protect Bit (USPB) can temporarily override and disable the write-protection provided by the SPB bits.

The figure below helps describing an overview of these methods. The device is default to the Solid mode when shipped from factory. The detail algorithm of advanced sector protection is shown as follows:

Solid Protection mode permits the SPB bits to be modified after power-on or a reset. The figure below is an overview of Advanced Sector Protection.

**Figure 76. Advanced Sector Protection Overview**

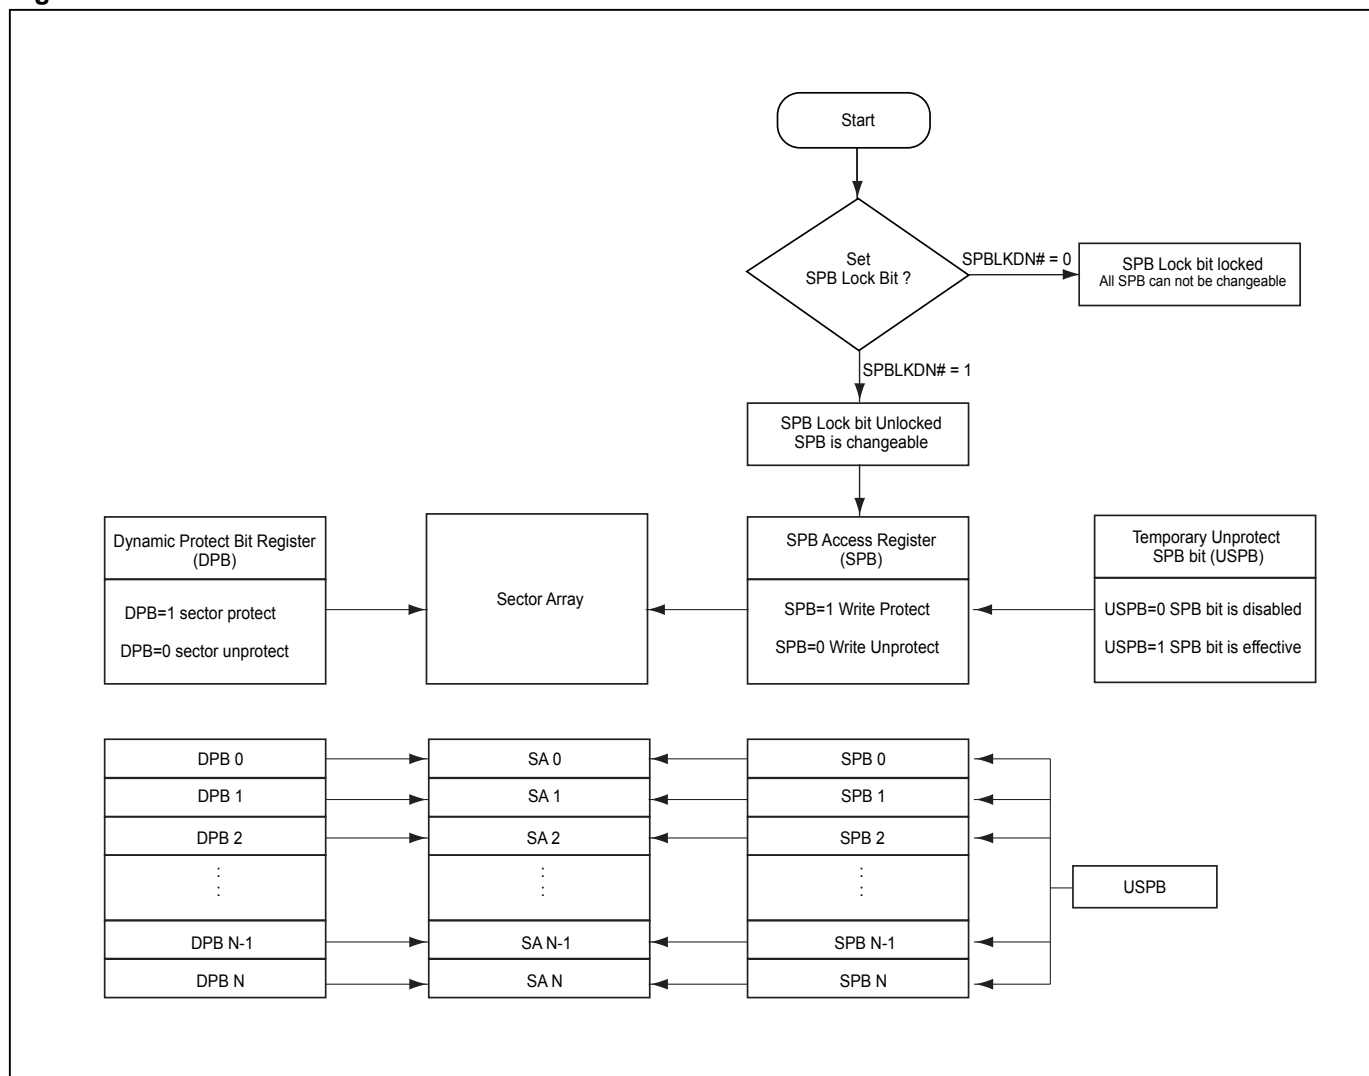

### 9-36-1. Lock Register

The Lock Register is a 16-bit one-time programmable register. Lock Register bit [6] is SPB Lock Down Bit (SPBLKDN) which is an unique bit assigned to control all SPB bit status.


When SPBLKDN is 1, SPB can be changed. When it is locked as 0, all SPB can not be changed anymore, and SPBLKDN bit itself can not be altered anymore, either.

The Lock Register is programmed using the WRLR (Write Lock Register) command. A WREN command must be executed to set the WEL bit before sending the WRLR command.


**Table 13. Lock Register**

| Bits    | Field Name | Function      | Type | Default State | Description                          |
|---------|------------|---------------|------|---------------|--------------------------------------|
| 15 to 7 | RFU        | Reserved      | OTP  | 1             | Reserved for Future Use              |
| 6       | SPBLKDN    | SPB Lock Down | OTP  | 1             | 1 = SPB changeable<br>0 = freeze SPB |
| 5 to 0  | RFU        | Reserved      | OTP  | 1             | Reserved for Future Use              |

**Figure 77. Read Lock Register (RDLR) Sequence**

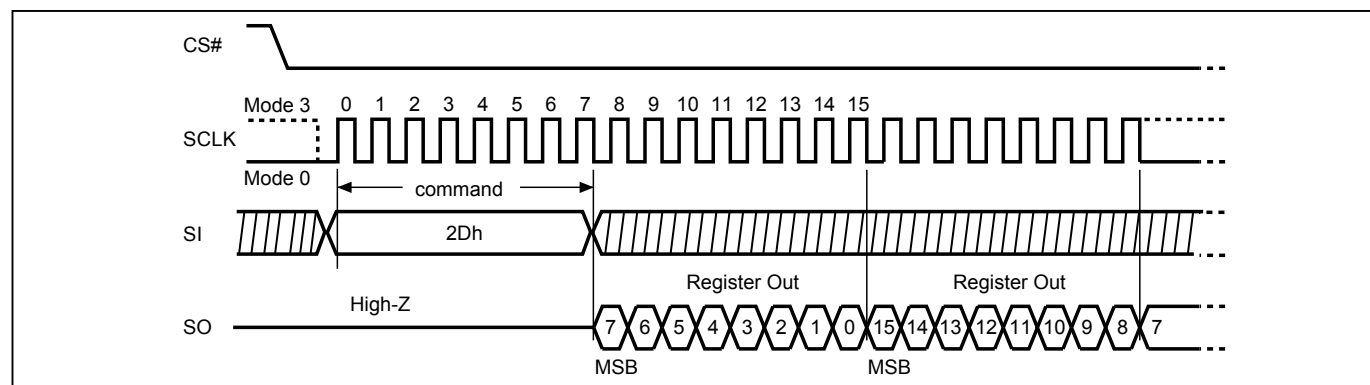

**Figure 78. Write Lock Register (WRLR) Sequence**

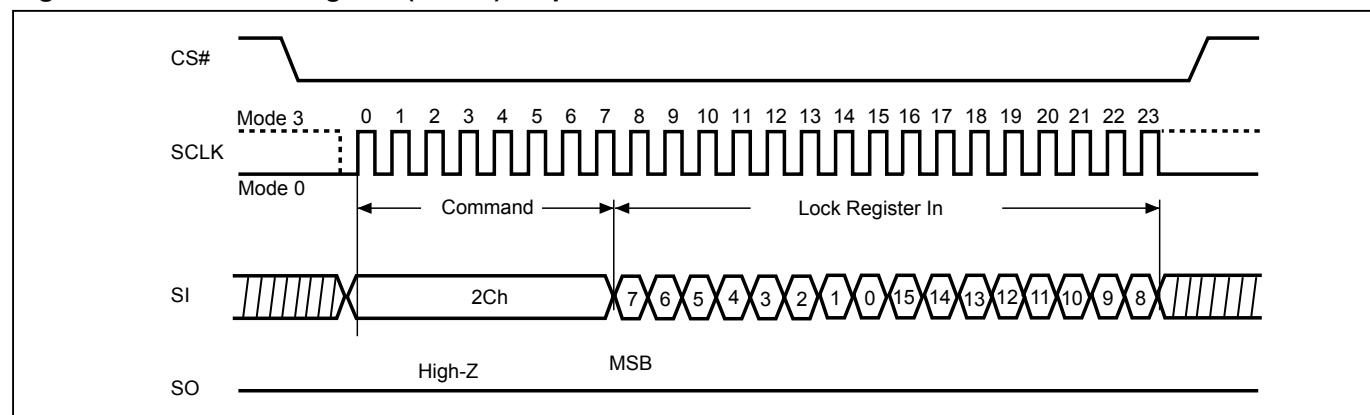

**9-36-2. Solid Protection Bits**

The Solid Protection Bits (SPBs) are nonvolatile bits for enabling or disabling write-protection to sectors and blocks. The SPB bits have the same endurance as the Flash memory. An SPB is assigned to each 4KB sector in the bottom and top 64KB of memory and to each 64KB block in the remaining memory. The factory default state of the SPB bits is “0”, which has the sector/block write-protection disabled.

When an SPB is set to “1”, the associated sector or block is write-protected. Program and erase operations on the sector or block will be inhibited. SPBs can be individually set to “1” by the WRSPB command. However, the SPBs cannot be individually cleared to “0”. Issuing the ESSPB command clears all SPBs to “0”. A WREN command must be executed to set the WEL bit before sending the WRSPB or ESSPB command.

The RDSPB command reads the status of the SPB of a sector or block. The RDSPB command returns 00h if the SPB is “0”, indicating write-protection is disabled. The RDSPB command returns FFh if the SPB is “1”, indicating write-protection is enabled.


In Solid Protection mode, the Unprotect Solid Protect Bit (USPB) can temporarily mask the SPB bits and disable the write-protection provided by the SPB bits.

**Note:** If SPBLKDN=0, commands to set or clear the SPB bits will be ignored.


**Table 14. SPB Register**

| Bit    | Description                | Bit Status                                                     | Default | Type         |
|--------|----------------------------|----------------------------------------------------------------|---------|--------------|
| 7 to 0 | SPB (Solid Protection Bit) | 00h = Unprotect Sector / Block<br>FFh = Protect Sector / Block | 00h     | Non-volatile |


**Figure 79. Read SPB Status (RDSPB) Sequence**

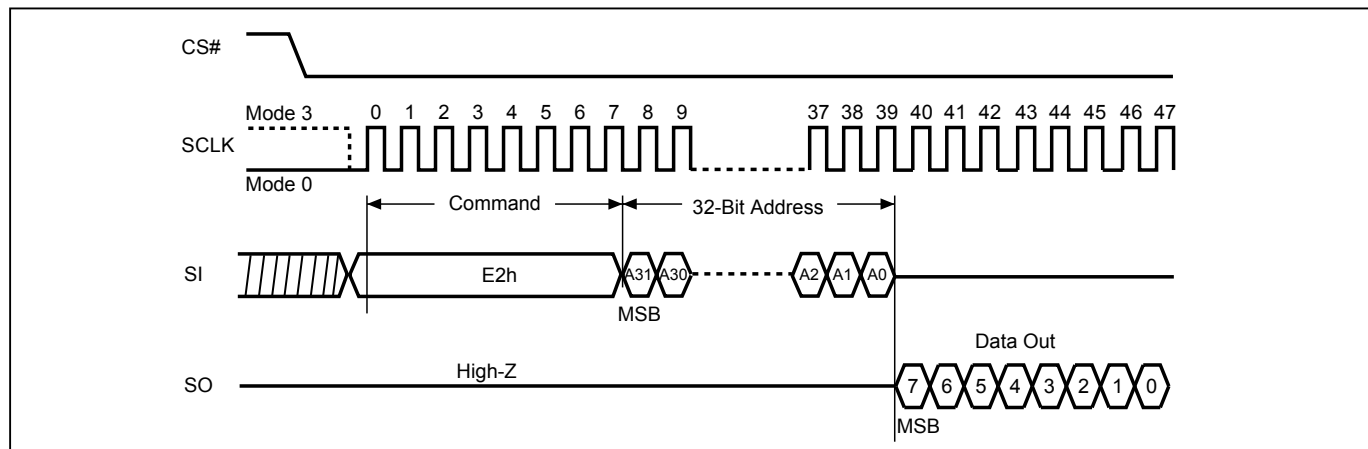

**Figure 80. SPB Erase (ESSPB) Sequence**

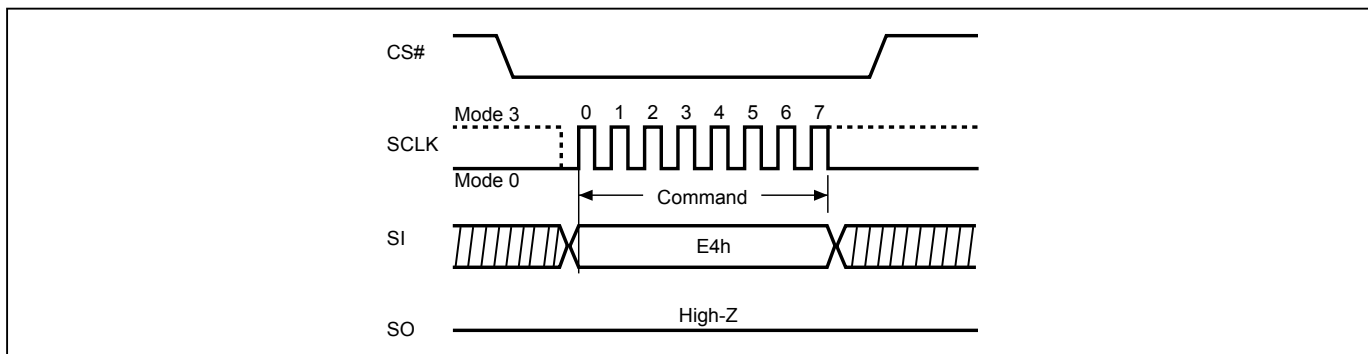

**Figure 81. SPB Program (WRSPB) Sequence**

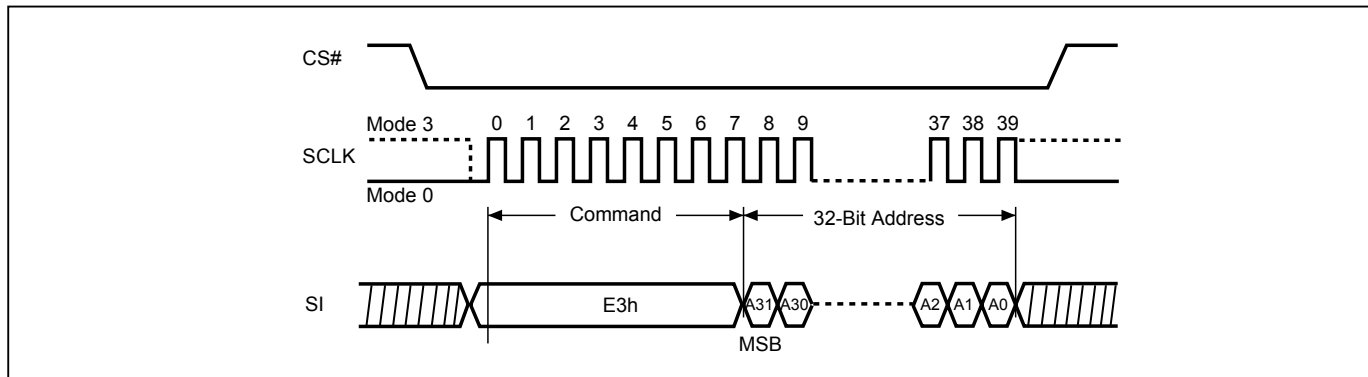

### 9-36-3. Dynamic Protection Bits

The Dynamic Protection Bits (DPBs) are volatile bits for quickly and easily enabling or disabling write-protection to sectors and blocks. A DPB is assigned to each 4KB sector in the bottom and top 64KB of memory and to each 64KB block in the rest of the memory. The DBPs can enable write-protection on a sector or block regardless of the state of the corresponding SPB. However, the DPB bits can only unprotect sectors or blocks whose SPB bits are “0” (unprotected).

When a DPB is “1”, the associated sector or block will be write-protected, preventing any program or erase operation on the sector or block. All DPBs default to “1” after power-on or reset. When a DPB is cleared to “0”, the associated sector or block will be unprotected if the corresponding SPB is also “0”.


DPB bits can be individually set to “1” or “0” by the WRDPB command. The DBP bits can also be globally cleared to “0” with the GBULK command or globally set to “1” with the GBLK command. A WREN command must be executed to set the WEL bit before sending the WRDPB, GBULK, or GBLK command.

The RDDPB command reads the status of the DPB of a sector or block. The RDDPB command returns 00h if the DPB is “0”, indicating write-protection is disabled. The RDDPB command returns FFh if the DPB is “1”, indicating write-protection is enabled.


**Table 15. DPB Register**

| Bit    | Description                  | Bit Status                                                     | Default | Type     |
|--------|------------------------------|----------------------------------------------------------------|---------|----------|
| 7 to 0 | DPB (Dynamic Protection Bit) | 00h = Unprotect Sector / Block<br>FFh = Protect Sector / Block | FFh     | Volatile |

**Figure 82. Read DPB Register (RDDPB) Sequence**

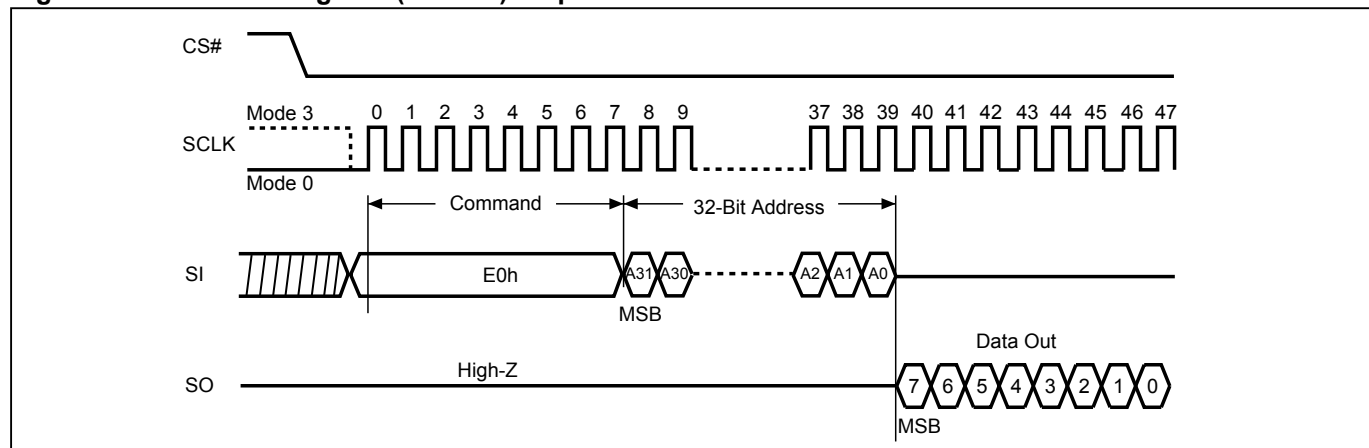

**Figure 83. Write DPB Register (WRDPB) Sequence**

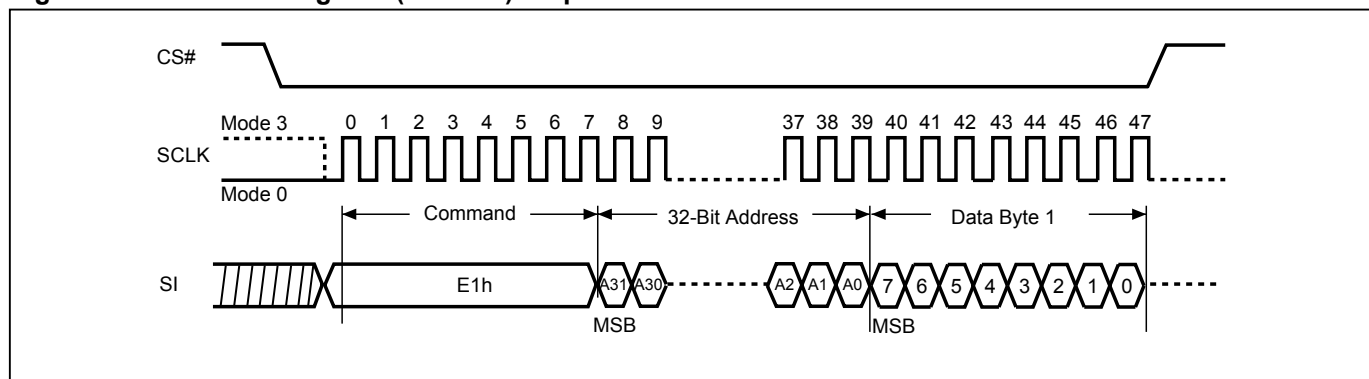

**9-36-4. Unprotect Solid Protect Bit (USPB)**

The Unprotect Solid Protect Bit is a volatile bit that defaults to “1” after power-on or reset. When USPB=1, the SPBs have their normal function. When USPB=0 all SPBs are masked and their write-protected sectors and blocks are temporarily unprotected (as long as their corresponding DPBs are “0”). The USPB provides a means to temporarily override the SPBs without having to issue the ESSPB and WRSPB commands to clear and set the SPBs. The USPB can be set or cleared as often as needed.

Please refer to ["9-36-6. Sector Protection States Summary Table"](#) for the sector state with the protection status of DPB/SPB/USPB bits.

**9-36-5. Gang Block Lock/Unlock (GBLK/GBULK)**

These instructions are only effective if WPSEL=1. The GBLK and GBULK instructions provide a quick method to set or clear all DPB bits at once.

The WREN (Write Enable) instruction is required before issuing the GBLK/GBULK instruction.

The sequence of issuing GBLK/GBULK instruction is: CS# goes low → send GBLK/GBULK (7Eh/98h) instruction → CS# goes high.

The CS# must go high exactly at the byte boundary, otherwise, the instruction will be rejected and not be executed.

**9-36-6. Sector Protection States Summary Table**

| DPB | SPB | USPB | Sector/Block Protection State |
|-----|-----|------|-------------------------------|
| 0   | 0   | 0    | Unprotected                   |
| 0   | 0   | 1    | Unprotected                   |
| 0   | 1   | 0    | Unprotected                   |
| 0   | 1   | 1    | Protected                     |
| 1   | 0   | 0    | Protected                     |
| 1   | 0   | 1    | Protected                     |
| 1   | 1   | 0    | Protected                     |
| 1   | 1   | 1    | Protected                     |

### 9-37. Program/Erase Suspend/Resume

The device allow the interruption of Sector-Erase, Block-Erase or Page-Program operations and conduct other operations.

After issue suspend command, the system can determine if the device has entered the Erase-Suspended mode through Bit2 (PSB) and Bit3 (ESB) of security register. (please refer to "[Table 12. Security Register Definition](#)")

Both SPI (8 clocks) and QPI (2 clocks) command cycle can accept by this instruction. The SIO[3:1] are don't care when during SPI mode.

### 9-38. Erase Suspend

Erase suspend allow the interruption of all erase operations. After the device has entered Erase-Suspended mode, the system can read any sector(s) or Block(s) except those being erased by the suspended erase operation. Reading the sector or Block being erase suspended is invalid.

After erase suspend, WEL bit will be clear, only read related, resume and reset command can be accepted, including: 03h, 0Bh, 3Bh, 6Bh, BBh, EBh, 5Ah, C0h, 06h, 04h, 2Bh, 9Fh, AFh, 05h, ABh, 90h, B1h, C1h, B0h, 30h, 66h, 99h, 00h, 35h, F5h, 15h, 2Dh, E2h, E0h.

If the system issues an Erase Suspend command after the sector erase operation has already begun, the device will not enter Erase-Suspended mode until tESL time has elapsed.

Erase Suspend Bit (ESB) indicates the status of Erase Suspend operation. Users may use ESB to identify the state of flash memory. After the flash memory is suspended by Erase Suspend command, ESB is set to "1". ESB is cleared to "0" after erase operation resumes.


### 9-39. Program Suspend

Program suspend allows the interruption of all program operations. After the device has entered Program-Suspended mode, the system can read any sector(s) or Block(s) except those being programmed by the suspended program operation. Reading the sector or Block being program suspended is invalid.


After program suspend, WEL bit will be cleared, only read related, resume and reset command can be accepted, including: 03h, 0Bh, 3Bh, 6Bh, BBh, EBh, 5Ah, C0h, 06h, 04h, 2Bh, 9Fh, AFh, 05h, ABh, 90h, B1h, C1h, B0h, 30h, 66h, 99h, 00h, 35h, F5h, 15h, 2Dh, E2h, E0h.

Program Suspend Bit (PSB) indicates the status of Program Suspend operation. Users may use PSB to identify the state of flash memory. After the flash memory is suspended by Program Suspend command, PSB is set to "1". PSB is cleared to "0" after program operation resumes.


**Figure 84. Suspend to Read Latency**

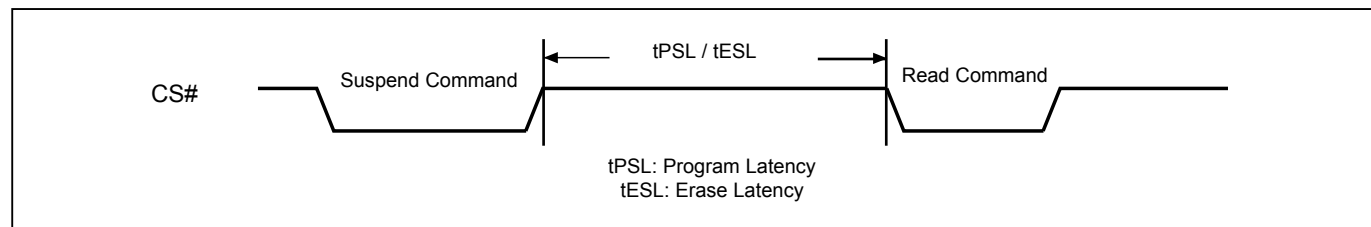

**Figure 85. Resume to Read Latency**

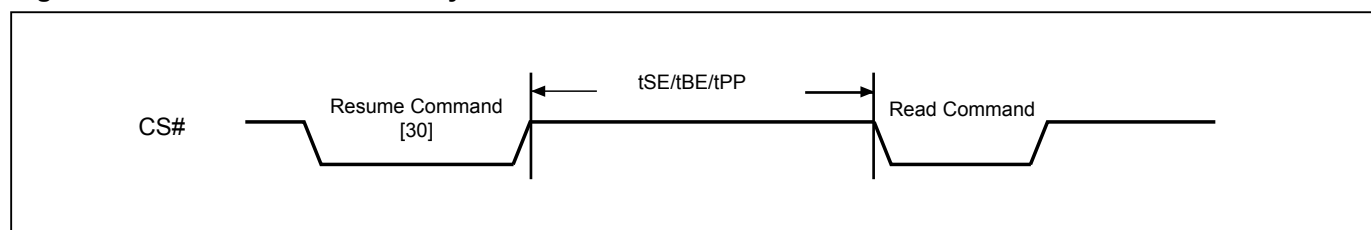

**Figure 86. Resume to Suspend Latency**

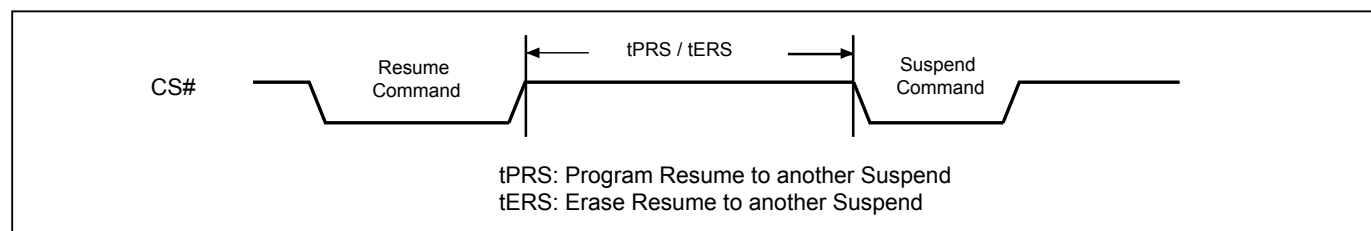

#### 9-40. Write-Resume

The Write operation is being resumed when Write-Resume instruction issued. ESB or PSB (suspend status bit) in Status register will be changed back to "0".

The operation of Write-Resume is as follows: CS# drives low → send write resume command cycle (30H) → drive CS# high. By polling Busy Bit in status register, the internal write operation status could be checked to be completed or not. The user may also wait the time lag of tSE, tBE, tPP for Sector-erase, Block-erase or Page-programming. WREN (command "06h") is not required to issue before resume. Resume to another suspend operation requires latency time of tPRS or tERS, as defined in ["Table 25. AC CHARACTERISTICS \(Temperature = -40°C to 85°C, VCC = 2.7V - 3.6V\)"](#).

Please note that, if "performance enhance mode" is executed during suspend operation, the device can not be resumed. To restart the write command, disable the "performance enhance mode" is required. After the "performance enhance mode" is disabled, the write-resume command is effective.

#### 9-41. No Operation (NOP)

The "No Operation" command is only able to terminate the Reset Enable (RSTEN) command and will not affect any other command.

Both SPI (8 clocks) and QPI (2 clocks) command cycle can accept by this instruction. The SIO[3:1] are don't care during SPI mode.

#### 9-42. Software Reset (Reset-Enable (RSTEN) and Reset (RST))

The Software Reset operation combines two instructions: Reset-Enable (RSTEN) command and Reset (RST) command. It returns the device to standby mode. All the volatile bits and settings will be cleared then, which makes the device return to the default status as power on.


To execute Reset command (RST), the Reset-Enable (RSTEN) command must be executed first to perform the Reset operation. If there is any other command to interrupt after the Reset-Enable command, the Reset-Enable will be invalid.

Both SPI (8 clocks) and QPI (2 clocks) command cycle can accept by this instruction. The SIO[3:1] are don't care when during SPI mode.

If the Reset command is executed during program or erase operation, the operation will be disabled, the data under processing could be damaged or lost.


The reset time is different depending on the last operation. For details, please refer to ["Table 21. Reset Timing-\(Other Operation\)"](#) for tREADY2.

**Figure 87. Software Reset Recovery**

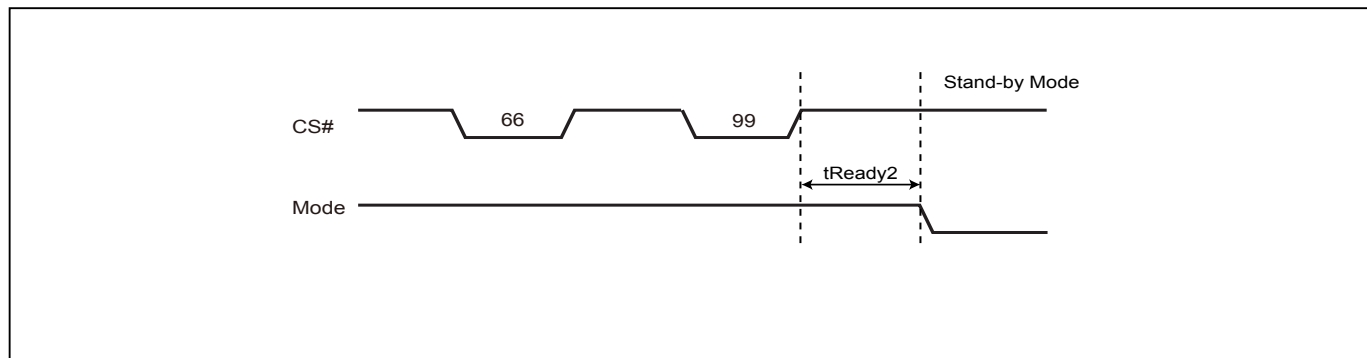


**Note:** Refer to "[Table 21. Reset Timing-\(Other Operation\)](#)" for tREADY2 data.

**Figure 88. Reset Sequence (SPI mode)**

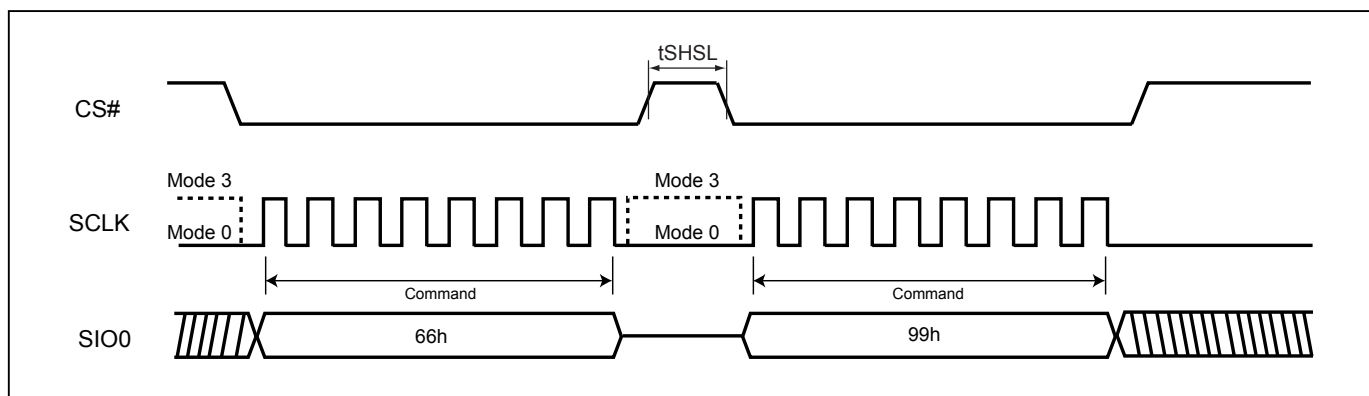

**Figure 89. Reset Sequence (QPI mode)**

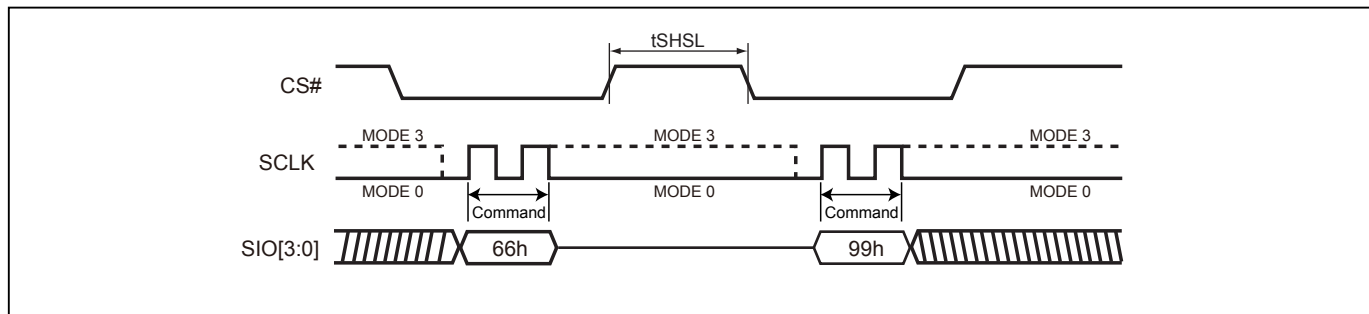


### 9-43. Read SFDP Mode (RDSFDP)

The Serial Flash Discoverable Parameter (SFDP) standard provides a consistent method of describing the functional and feature capabilities of serial flash devices in a standard set of internal parameter tables. These parameter tables can be interrogated by host system software to enable adjustments needed to accommodate divergent features from multiple vendors. The concept is similar to the one found in the Introduction of JEDEC Standard, JESD68 on CFI.

The sequence of issuing RDSFDP instruction is CS# goes low→send RDSFDP instruction (5Ah)→send 3 address bytes on SI pin→send 1 dummy byte on SI pin→read SFDP code on SO→to end RDSFDP operation can use CS# to high at any time during data out.

SFDP is a JEDEC standard, JESD216B.

**Figure 90. Read Serial Flash Discoverable Parameter (RDSFDP) Sequence**

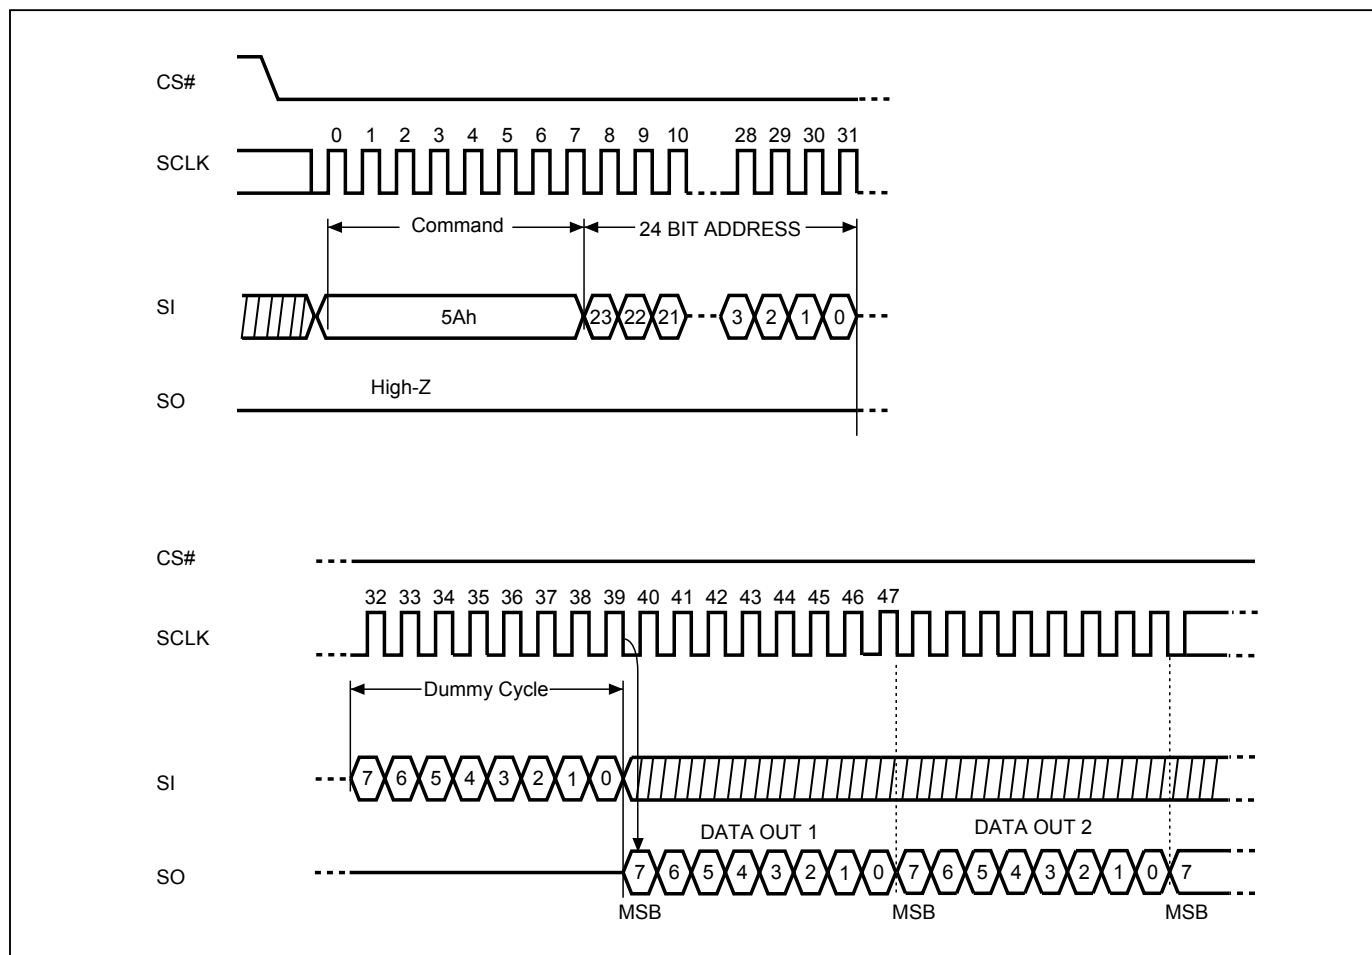

**Table 16. Signature and Parameter Identification Data Values**

SFDP Table (JESD216B) below is for MX25L25645GM2I-10G, MX25L25645GMI-10G, MX25L25645GZ2I-10G, MX25L25645GZNI-10G, MX25L25645GM2I-08G, MX25L25645GMI-08G, MX25L25645GZ2I-08G, MX25L25645GZNI-08G, MX25L25645GXDI-08G, MX25L25645GXCI-08G and MX25L25645GXDI-10G

| Description                                | Comment                                                            | Add (h)<br>(Byte) | DW Add<br>(Bit) | Data (h/b)<br>(Note1) | Data<br>(h) |
|--------------------------------------------|--------------------------------------------------------------------|-------------------|-----------------|-----------------------|-------------|
| SFDP Signature                             | Fixed: 50444653h                                                   | 00h               | 07:00           | 53h                   | 53h         |
|                                            |                                                                    | 01h               | 15:08           | 46h                   | 46h         |
|                                            |                                                                    | 02h               | 23:16           | 44h                   | 44h         |
|                                            |                                                                    | 03h               | 31:24           | 50h                   | 50h         |
| SFDP Minor Revision Number                 | Start from 00h                                                     | 04h               | 07:00           | 06h                   | 06h         |
| SFDP Major Revision Number                 | Start from 01h                                                     | 05h               | 15:08           | 01h                   | 01h         |
| Number of Parameter Headers                | This number is 0-based. Therefore, 0 indicates 1 parameter header. | 06h               | 23:16           | 02h                   | 02h         |
| Unused                                     |                                                                    | 07h               | 31:24           | FFh                   | FFh         |
| ID number (JEDEC)                          | 00h: it indicates a JEDEC specified header.                        | 08h               | 07:00           | 00h                   | 00h         |
| Parameter Table Minor Revision Number      | Start from 00h                                                     | 09h               | 15:08           | 06h                   | 06h         |
| Parameter Table Major Revision Number      | Start from 01h                                                     | 0Ah               | 23:16           | 01h                   | 01h         |
| Parameter Table Length<br>(in double word) | How many DWORDs in the Parameter table                             | 0Bh               | 31:24           | 10h                   | 10h         |
| Parameter Table Pointer (PTP)              | First address of JEDEC Flash Parameter table                       | 0Ch               | 07:00           | 30h                   | 30h         |
|                                            |                                                                    | 0Dh               | 15:08           | 00h                   | 00h         |
|                                            |                                                                    | 0Eh               | 23:16           | 00h                   | 00h         |
| Unused                                     |                                                                    | 0Fh               | 31:24           | FFh                   | FFh         |

SFDP Table below is for MX25L25645GM2I-10G, MX25L25645GMI-10G, MX25L25645GZ2I-10G, MX25L25645GZNI-10G, MX25L25645GM2I-08G, MX25L25645GMI-08G, MX25L25645GZ2I-08G, MX25L25645GZNI-08G, MX25L25645GXDI-08G, MX25L25645GXCI-08G and MX25L25645GXDI-10G

| Description                                | Comment                                           | Add (h)<br>(Byte) | DW Add<br>(Bit) | Data (h/b)<br>(Note1) | Data<br>(h) |
|--------------------------------------------|---------------------------------------------------|-------------------|-----------------|-----------------------|-------------|
| ID number<br>(Macronix manufacturer ID)    | it indicates Macronix manufacturer ID             | 10h               | 07:00           | C2h                   | C2h         |
| Parameter Table Minor Revision Number      | Start from 00h                                    | 11h               | 15:08           | 00h                   | 00h         |
| Parameter Table Major Revision Number      | Start from 01h                                    | 12h               | 23:16           | 01h                   | 01h         |
| Parameter Table Length<br>(in double word) | How many DWORDs in the Parameter table            | 13h               | 31:24           | 04h                   | 04h         |
| Parameter Table Pointer (PTP)              | First address of Macronix Flash Parameter table   | 14h               | 07:00           | 10h                   | 10h         |
|                                            |                                                   | 15h               | 15:08           | 01h                   | 01h         |
|                                            |                                                   | 16h               | 23:16           | 00h                   | 00h         |
| Unused                                     |                                                   | 17h               | 31:24           | FFh                   | FFh         |
| ID number<br>(4-byte Address Instruction)  | 4-byte Address Instruction parameter ID           | 18h               | 07:00           | 84h                   | 84h         |
| Parameter Table Minor Revision Number      | Start from 00h                                    | 19h               | 15:08           | 00h                   | 00h         |
| Parameter Table Major Revision Number      | Start from 01h                                    | 1Ah               | 23:16           | 01h                   | 01h         |
| Parameter Table Length<br>(in double word) | How many DWORDs in the Parameter table            | 1Bh               | 31:24           | 02h                   | 02h         |
| Parameter Table Pointer (PTP)              | First address of 4-byte Address Instruction table | 1Ch               | 07:00           | C0h                   | C0h         |
|                                            |                                                   | 1Dh               | 15:08           | 00h                   | 00h         |
|                                            |                                                   | 1Eh               | 23:16           | 00h                   | 00h         |
| Unused                                     |                                                   | 1Fh               | 31:24           | FFh                   | FFh         |

**Table 17. Parameter Table (0): JEDEC Flash Parameter Tables**

SFDP Table below is for MX25L25645GM2I-10G, MX25L25645GMI-10G, MX25L25645GZ2I-10G, MX25L25645GZNI-10G, MX25L25645GM2I-08G, MX25L25645GMI-08G, MX25L25645GZ2I-08G, MX25L25645GZNI-08G, MX25L25645GXDI-08G, MX25L25645GXCI-08G and MX25L25645GXDI-10G

| Description                                                                      | Comment                                                                                                                                               | Add (h)<br>(Byte) | DW Add<br>(Bit) | Data (h/b)<br>(Note1) | Data<br>(h) |
|----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|-----------------|-----------------------|-------------|
| Block/Sector Erase sizes                                                         | 00: Reserved, 01: 4KB erase,<br>10: Reserved,<br>11: not supported 4KB erase                                                                          | 30h               | 01:00           | 01b                   | E5h         |
| Write Granularity                                                                | 0: 1Byte, 1: 64Byte or larger                                                                                                                         |                   | 02              | 1b                    |             |
| Write Enable Instruction Required<br>for Writing to Volatile Status<br>Registers | 0: not required<br>1: required 00h to be written to the<br>status register                                                                            |                   | 03              | 0b                    |             |
| Write Enable Instruction Select for<br>Writing to Volatile Status Registers      | 0: use 50h instruction<br>1: use 06h instruction<br>Note: If target flash status register is<br>nonvolatile, then bits 3 and 4 must<br>be set to 00b. |                   | 04              | 0b                    |             |
| Unused                                                                           | Contains 111b and can never be<br>changed                                                                                                             |                   | 07:05           | 111b                  |             |
| 4KB Erase Instruction                                                            |                                                                                                                                                       | 31h               | 15:08           | 20h                   | 20h         |
| (1-1-2) Fast Read (Note2)                                                        | 0=not supported 1=supported                                                                                                                           | 32h               | 16              | 1b                    | FBh         |
| Address Bytes Number used in<br>addressing flash array                           | 00: 3Byte only, 01: 3 or 4Byte,<br>10: 4Byte only, 11: Reserved                                                                                       |                   | 18:17           | 01b                   |             |
| Double Transfer Rate (DTR)<br>Clocking                                           | 0=not supported 1=supported                                                                                                                           |                   | 19              | 1b                    |             |
| (1-2-2) Fast Read                                                                | 0=not supported 1=supported                                                                                                                           |                   | 20              | 1b                    |             |
| (1-4-4) Fast Read                                                                | 0=not supported 1=supported                                                                                                                           |                   | 21              | 1b                    |             |
| (1-1-4) Fast Read                                                                | 0=not supported 1=supported                                                                                                                           |                   | 22              | 1b                    |             |
| Unused                                                                           |                                                                                                                                                       |                   | 23              | 1b                    |             |
| Unused                                                                           |                                                                                                                                                       | 33h               | 31:24           | FFh                   | FFh         |
| Flash Memory Density                                                             |                                                                                                                                                       | 37h:34h           | 31:00           | 0FFF FFFFh            |             |
| (1-4-4) Fast Read Number of Wait<br>states (Note3)                               | 0 0000b: Not supported; 0 0100b: 4<br>0 0110b: 6; 0 1000b: 8                                                                                          | 38h               | 04:00           | 0 0100b               | 44h         |
| (1-4-4) Fast Read Number of<br>Mode Bits (Note4)                                 | Mode Bits:<br>000b: Not supported; 010b: 2 bits                                                                                                       |                   | 07:05           | 010b                  |             |
| (1-4-4) Fast Read Instruction                                                    |                                                                                                                                                       | 39h               | 15:08           | EBh                   | EBh         |
| (1-1-4) Fast Read Number of Wait<br>states                                       | 0 0000b: Not supported; 0 0100b: 4<br>0 0110b: 6; 0 1000b: 8                                                                                          | 3Ah               | 20:16           | 0 1000b               | 08h         |
| (1-1-4) Fast Read Number of<br>Mode Bits                                         | Mode Bits:<br>000b: Not supported; 010b: 2 bits                                                                                                       |                   | 23:21           | 000b                  |             |
| (1-1-4) Fast Read Instruction                                                    |                                                                                                                                                       | 3Bh               | 31:24           | 6Bh                   | 6Bh         |

SFDP Table below is for MX25L25645GM2I-10G, MX25L25645GMI-10G, MX25L25645GZ2I-10G, MX25L25645GZNI-10G, MX25L25645GM2I-08G, MX25L25645GMI-08G, MX25L25645GZ2I-08G, MX25L25645GZNI-08G, MX25L25645GXDI-08G, MX25L25645GXCI-08G and MX25L25645GXDI-10G

| Description                             | Comment                                                                            | Add (h)<br>(Byte) | DW Add<br>(Bit) | Data (h/b)<br>(Note1) | Data<br>(h) |
|-----------------------------------------|------------------------------------------------------------------------------------|-------------------|-----------------|-----------------------|-------------|
| (1-1-2) Fast Read Number of Wait states | 0 0000b: Not supported; 0 0100b: 4<br>0 0110b: 6; 0 1000b: 8                       | 3Ch               | 04:00           | 0 1000b               | 08h         |
| (1-1-2) Fast Read Number of Mode Bits   | Mode Bits:<br>000b: Not supported; 010b: 2 bits                                    |                   | 07:05           | 000b                  |             |
| (1-1-2) Fast Read Instruction           |                                                                                    | 3Dh               | 15:08           | 3Bh                   | 3Bh         |
| (1-2-2) Fast Read Number of Wait states | 0 0000b: Not supported; 0 0100b: 4<br>0 0110b: 6; 0 1000b: 8                       | 3Eh               | 20:16           | 0 0100b               | 04h         |
| (1-2-2) Fast Read Number of Mode Bits   | Mode Bits:<br>000b: Not supported; 010b: 2 bits                                    |                   | 23:21           | 000b                  |             |
| (1-2-2) Fast Read Instruction           |                                                                                    | 3Fh               | 31:24           | BBh                   | BBh         |
| (2-2-2) Fast Read                       | 0=not supported 1=supported                                                        | 40h               | 00              | 0b                    | FEh         |
| Unused                                  |                                                                                    |                   | 03:01           | 111b                  |             |
| (4-4-4) Fast Read                       | 0=not supported 1=supported                                                        |                   | 04              | 1b                    |             |
| Unused                                  |                                                                                    |                   | 07:05           | 111b                  |             |
| Unused                                  |                                                                                    | 43h:41h           | 31:08           | FFh                   | FFh         |
| Unused                                  |                                                                                    | 45h:44h           | 15:00           | FFh                   | FFh         |
| (2-2-2) Fast Read Number of Wait states | 0 0000b: Not supported; 0 0100b: 4<br>0 0110b: 6; 0 1000b: 8                       | 46h               | 20:16           | 0 0000b               | 00h         |
| (2-2-2) Fast Read Number of Mode Bits   | Mode Bits:<br>000b: Not supported; 010b: 2 bits                                    |                   | 23:21           | 000b                  |             |
| (2-2-2) Fast Read Instruction           |                                                                                    | 47h               | 31:24           | FFh                   | FFh         |
| Unused                                  |                                                                                    | 49h:48h           | 15:00           | FFh                   | FFh         |
| (4-4-4) Fast Read Number of Wait states | 0 0000b: Not supported; 0 0100b: 4<br>0 0110b: 6; 0 1000b: 8                       | 4Ah               | 20:16           | 0 0100b               | 44h         |
| (4-4-4) Fast Read Number of Mode Bits   | Mode Bits:<br>000b: Not supported; 010b: 2 bits                                    |                   | 23:21           | 010b                  |             |
| (4-4-4) Fast Read Instruction           |                                                                                    | 4Bh               | 31:24           | EBh                   | EBh         |
| Erase Type 1 Size                       | Sector/block size = 2 <sup>N</sup> bytes (Note5)<br>0Ch: 4KB; 0Fh: 32KB; 10h: 64KB | 4Ch               | 07:00           | 0Ch                   | 0Ch         |
| Erase Type 1 Erase Instruction          |                                                                                    | 4Dh               | 15:08           | 20h                   | 20h         |
| Erase Type 2 Size                       | Sector/block size = 2 <sup>N</sup> bytes<br>00h: N/A; 0Fh: 32KB; 10h: 64KB         | 4Eh               | 23:16           | 0Fh                   | 0Fh         |
| Erase Type 2 Erase Instruction          |                                                                                    | 4Fh               | 31:24           | 52h                   | 52h         |
| Erase Type 3 Size                       | Sector/block size = 2 <sup>N</sup> bytes<br>00h: N/A; 0Fh: 32KB; 10h: 64KB         | 50h               | 07:00           | 10h                   | 10h         |
| Erase Type 3 Erase Instruction          |                                                                                    | 51h               | 15:08           | D8h                   | D8h         |
| Erase Type 4 Size                       | 00h: N/A, This sector type doesn't exist                                           | 52h               | 23:16           | 00h                   | 00h         |
| Erase Type 4 Erase Instruction          |                                                                                    | 53h               | 31:24           | FFh                   | FFh         |

SFDP Table below is for MX25L25645GM2I-10G, MX25L25645GMI-10G, MX25L25645GZ2I-10G, MX25L25645GZNI-10G, MX25L25645GM2I-08G, MX25L25645GMI-08G, MX25L25645GZ2I-08G, MX25L25645GZNI-08G, MX25L25645GXDI-08G, MX25L25645GXCI-08G and MX25L25645GXDI-10G

| Description                                                       | Comment                                                                           | Add (h)<br>(Byte) | DW Add<br>(Bit) | Data (h/b)<br>(Note1) | Data<br>(h) |
|-------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------|-----------------|-----------------------|-------------|
| Multiplier from typical erase time to maximum erase time          | Multiplier value: 0h~Fh (0~15)<br>Max. time = 2 * (Multiplier + 1) * Typical Time | 54h               | 03:00           | 0110b                 | D6h         |
| Erase Type 1 Erase Time<br>(Typical)                              | Count value: 00h~1Fh (0~31)<br>Typical Time = (Count + 1) * Units                 | 55h               | 07:04           | 1 1101b               | 59h         |
|                                                                   | Units<br>00: 1ms, 01: 16ms<br>10b: 128ms, 11b: 1s                                 |                   | 08              |                       |             |
|                                                                   |                                                                                   |                   | 10:09           | 00b                   |             |
| EraseType 2 Erase Time<br>(Typical)                               | Count value: 00h~1Fh (0~31)<br>Typical Time = (Count + 1) * Units                 | 56h               | 15:11           | 0 1011b               | DDh         |
|                                                                   | Units<br>00: 1ms, 01: 16ms<br>10b: 128ms, 11b: 1s                                 |                   | 17:16           | 01b                   |             |
| Erase Type 3 Erase Time<br>(Typical)                              | Count value: 00h~1Fh (0~31)<br>Typical Time = (Count + 1) * Units                 | 56h               | 22:18           | 1 0111b               | DDh         |
|                                                                   | Units<br>00: 1 ms, 01: 16 ms<br>10b: 128ms, 11b: 1s                               |                   | 24:23           | 01b                   |             |
|                                                                   |                                                                                   | 57h               | 29:25           | 0 0000b               | 00h         |
| Erase Type 4 Erase Time<br>(Typical)                              | Count value: 00h~1Fh (0~31)<br>Typical Time = (Count + 1) * Units                 |                   | 31:30           | 00b                   |             |
|                                                                   | Units<br>00: 1ms, 01: 16ms<br>10b: 128 ms, 11b: 1 s                               |                   |                 |                       |             |
| Multiplier from typical time to max time for Page or byte program | Multiplier value: 0h~Fh (0~15)<br>Max. time = 2 * (Multiplier + 1) * Typical Time | 58h               | 03:00           | 0010b                 | 82h         |
| Page Program Size                                                 | Page size = 2^N bytes<br>2^8 = 256 bytes, 8h = 1000b                              |                   | 07:04           | 1000h                 |             |
| Page Program Time<br>(Typical)                                    | Count value: 00h~1Fh (0~31)<br>Typical Time = (Count + 1) * Units                 | 59h               | 12:08           | 1 1111b               | 9Fh         |
|                                                                   | Units<br>0: 8us, 1: 64us                                                          |                   | 13              | 0b                    |             |
| Byte Program Time, First Byte<br>(Typical)                        | Count value: 0h~Fh (0~15)<br>Typical Time = (Count + 1) * Units                   | 5Ah               | 15:14           | 1110b                 | 03h         |
|                                                                   | Units<br>0: 1us, 1: 8us                                                           |                   | 17:16           |                       |             |
| Byte Program Time, Additional<br>Byte<br>(Typical)                | Count value: 0h~Fh (0~15)<br>Typical Time = (Count + 1) * Units                   | 5Ah               | 18              | 0b                    |             |
|                                                                   | Units<br>0: 1us, 1: 8us                                                           |                   | 22:19           | 0000b                 |             |
|                                                                   |                                                                                   |                   | 23              | 0b                    |             |

SFDP Table below is for MX25L25645GM2I-10G, MX25L25645GMI-10G, MX25L25645GZ2I-10G, MX25L25645GZNI-10G, MX25L25645GM2I-08G, MX25L25645GMI-08G, MX25L25645GZ2I-08G, MX25L25645GZNI-08G, MX25L25645GXDI-08G, MX25L25645GXCI-08G and MX25L25645GXDI-10G

| Description                                     | Comment                                                                                                                                                                                                                                                                                                                                                                                                       | Add (h)<br>(Byte) | DW Add<br>(Bit) | Data (h/b)<br>(Note1) | Data<br>(h) |
|-------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|-----------------|-----------------------|-------------|
| Chip Erase Time<br>(Typical)                    | Count value: 00h~1Fh (0~31)<br>Typical Time = (Count + 1) * Units                                                                                                                                                                                                                                                                                                                                             | 5Bh               | 27:24<br>28     | 1 1011b               | DBh         |
|                                                 | Units<br>00: 16ms, 01: 256ms<br>10: 4s, 11: 64s                                                                                                                                                                                                                                                                                                                                                               |                   | 30:29           | 10b                   |             |
|                                                 | Reserved                                                                                                                                                                                                                                                                                                                                                                                                      |                   | 31              | 1b                    |             |
| Prohibited Operations During<br>Program Suspend | <ul style="list-style-type: none"> <li>♦ xxx0b: May not initiate a new erase anywhere</li> <li>♦ xx0xb: May not initiate a new page program anywhere</li> <li>♦ x1xxb: May not initiate a read in the program suspended page size</li> <li>♦ 1xxxb: The erase and program restrictions in bits 1:0 are sufficient</li> </ul>                                                                                  | 5Ch               | 03:00           | 0100b                 | 44h         |
| Prohibited Operations During<br>Erase Suspend   | <ul style="list-style-type: none"> <li>♦ xxx0b: May not initiate a new erase anywhere</li> <li>♦ xx1xb: May not initiate a page program in the erase suspended sector size</li> <li>♦ xx0xb: May not initiate a page program anywhere</li> <li>♦ x1xxb: May not initiate a read in the erase suspended sector size</li> <li>♦ 1xxxb: The erase and program restrictions in bits 5:4 are sufficient</li> </ul> |                   | 07:04           | 0100b                 |             |
| Reserved                                        | Reserved: 1b                                                                                                                                                                                                                                                                                                                                                                                                  | 5Dh               | 08              | 1b                    | 03h         |
| Program Resume to Suspend<br>Interval (Typical) | Count value: 0h~Fh (0~15)<br>Typical Time = (Count + 1) * 64us                                                                                                                                                                                                                                                                                                                                                |                   | 12:09           | 0001b                 |             |
| Program Suspend Latency<br>(Max.)               | Count value: 00h~1Fh (0~31)<br>Maximum Time = (Count + 1) * Units                                                                                                                                                                                                                                                                                                                                             | 5Eh               | 15:13<br>17:16  | 1 1000b               | 67h         |
|                                                 | Units<br>00: 128ns, 01: 1us<br>10: 8us, 11: 64us                                                                                                                                                                                                                                                                                                                                                              |                   | 19:18           | 01b                   |             |
| Erase Resume to Suspend<br>Interval (Typical)   | Count value: 0h~Fh (0~15)<br>Typical Time = (Count + 1) * 64us                                                                                                                                                                                                                                                                                                                                                |                   | 23:20           | 0110b                 |             |
| Erase Suspend Latency<br>(Max.)                 | Count value: 00h~1Fh (0~31)<br>Maximum Time = (Count + 1) * Units                                                                                                                                                                                                                                                                                                                                             | 5Fh               | 28:24           | 1 1000b               | 38h         |
|                                                 | Units<br>00: 128ns, 01: 1us<br>10: 8us, 11: 64us                                                                                                                                                                                                                                                                                                                                                              |                   | 30:29           | 01b                   |             |
| Suspend / Resume supported                      | 0= Support 1= Not supported                                                                                                                                                                                                                                                                                                                                                                                   |                   | 31              | 0b                    |             |
| Program Resume Instruction                      | Instruction to Resume a Program                                                                                                                                                                                                                                                                                                                                                                               | 60h               | 07:00           | 30h                   | 30h         |
| Program Suspend Instruction                     | Instruction to Suspend a Program                                                                                                                                                                                                                                                                                                                                                                              | 61h               | 15:08           | B0h                   | B0h         |
| Erase Resume Instruction                        | Instruction to Resume Write/Erase                                                                                                                                                                                                                                                                                                                                                                             | 62h               | 23:16           | 30h                   | 30h         |
| Erase Suspend Instruction                       | Instruction to Suspend Write/Erase                                                                                                                                                                                                                                                                                                                                                                            | 63h               | 31:24           | B0h                   | B0h         |

SFDP Table below is for MX25L25645GM2I-10G, MX25L25645GMI-10G, MX25L25645GZ2I-10G, MX25L25645GZNI-10G, MX25L25645GM2I-08G, MX25L25645GMI-08G, MX25L25645GZ2I-08G, MX25L25645GZNI-08G, MX25L25645GXDI-08G, MX25L25645GXCI-08G and MX25L25645GXDI-10G

| Description                                                    | Comment                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Add (h)<br>(Byte) | DW Add<br>(Bit) | Data (h/b)<br>(Note1) | Data<br>(h) |
|----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|-----------------|-----------------------|-------------|
| Reserved                                                       | Reserved: 11b                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                   | 01:00           | 11b                   |             |
| Status Register Polling Device Busy                            | <ul style="list-style-type: none"> <li>♦ Bit 2: Read WIP bit [0] by 05h Read instruction</li> <li>♦ Bit 3: Read bit 7 of Status Register by 70h Read instruction (0=not supported 1=support)</li> <li>♦ Bit 07:04, Reserved: 1111b</li> </ul>                                                                                                                                                                                                                                | 64h               | 07:02           | 11 1101b              | F7h         |
| Release from Deep Power-down (RDP) Delay (Max.)                | Count value: 00h~1Fh (0~31)<br>Maximum Time = (Count + 1) * Units<br>Units<br>00: 128ns, 01: 1us<br>10: 8us, 11: 64us                                                                                                                                                                                                                                                                                                                                                        | 65h               | 12:08<br>14:13  | 1 1101b<br>01b        | BDh         |
| Release from Deep Power-down (RDP) Instruction                 | Instruction to Exit Deep Power Down<br>♦ FFh: Don't need command                                                                                                                                                                                                                                                                                                                                                                                                             | 66h               | 15<br>22:16     | 1010 1011b<br>(ABh)   | D5h         |
| Enter Deep Power Down Instruction                              | Instruction to Enter Deep Power Down                                                                                                                                                                                                                                                                                                                                                                                                                                         | 67h               | 23<br>30:24     | 1011 1001b<br>(B9h)   | 5Ch         |
| Deep Power Down Supported                                      | 0: Supported 1: Not supported                                                                                                                                                                                                                                                                                                                                                                                                                                                | 67h               | 31              | 0b                    |             |
| 4-4-4 Mode Disable Sequences                                   | Methods to exit 4-4-4 mode<br>♦ xx1xb: issue F5h instruction                                                                                                                                                                                                                                                                                                                                                                                                                 | 68h               | 03:00           | 1010b                 | 4Ah         |
| 4-4-4 Mode Enable Sequences                                    | Methods to enter 4-4-4 mode<br>♦ x x1xxb: issue instruction 35h                                                                                                                                                                                                                                                                                                                                                                                                              |                   | 07:04<br>08     | 0 0100b               |             |
| 0-4-4 Mode Supported                                           | Performance Enhance Mode,<br>Continuous Read, Execute in Place<br>0: Not supported 1: Supported                                                                                                                                                                                                                                                                                                                                                                              |                   | 09              | 1b                    |             |
| 0-4-4 Mode Exit Method                                         | <ul style="list-style-type: none"> <li>♦ xx_1xb: Mode Bits[7:0] = 00h will terminate this mode at the end of the current read operation.</li> <li>♦ xx_xx1xb: If 3-Byte address active, input Fh on DQ0-DQ3 for 8 clocks. If 4-Byte address active, input Fh on DQ0-DQ3 for 10 clocks.</li> <li>♦ xx_x1xxb: Reserved</li> <li>♦ xx_1xxxb: Input Fh (mode bit reset) on DQ0-DQ3 for 8 clocks.</li> <li>♦ x1_1xxxb: Mode Bit[7:0]≠Axh</li> <li>♦ 1x_1xxxb: Reserved</li> </ul> | 69h               | 15:10           | 10 0111b              | 9Eh         |
| 0-4-4 Mode Entry Method                                        | <ul style="list-style-type: none"> <li>♦ xxx1b: Mode Bits[7:0] = A5h Note: QE must be set prior to using this mode</li> <li>♦ x1xxb: Mode Bit[7:0]=Axh</li> <li>♦ 1xxxb: Reserved</li> </ul>                                                                                                                                                                                                                                                                                 |                   | 19:16           | 1001h                 |             |
| Quad Enable (QE) bit Requirements                              | <ul style="list-style-type: none"> <li>♦ 000b: No QE bit. Detects 1-1-4/1-4-4 reads based on instruction</li> <li>♦ 010b: QE is bit 6 of Status Register. where 1=Quad Enable or 0=not Quad Enable</li> <li>♦ 111b: Not Supported</li> </ul>                                                                                                                                                                                                                                 | 6Ah               | 22:20           | 010b                  | 29h         |
| HOLD and RESET Disable by bit 4 of Ext. Configuration Register | 0: Not supported                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                   | 23              | 0b                    |             |

SFDP Table below is for MX25L25645GM2I-10G, MX25L25645GMI-10G, MX25L25645GZ2I-10G, MX25L25645GZNI-10G, MX25L25645GM2I-08G, MX25L25645GMI-08G, MX25L25645GZ2I-08G, MX25L25645GZNI-08G, MX25L25645GXDI-08G, MX25L25645GXCI-08G and MX25L25645GXDI-10G

| Description                                                                          | Comment                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Add (h)<br>(Byte) | DW Add<br>(Bit) | Data (h/b)<br>(Note1) | Data<br>(h) |
|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|-----------------|-----------------------|-------------|
| Reserved                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 6Bh               | 31:24           | FFh                   | FFh         |
| Volatile or Non-Volatile Register and Write Enable Instruction for Status Register 1 | <ul style="list-style-type: none"> <li>♦ xxx_xxx1b: Non-Volatile Status Register 1, powers-up to last written value, use instruction 06h to enable write</li> <li>♦ x1_xxxxb: Reserved</li> <li>♦ 1xx_xxxxb: Reserved</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                    | 6Ch               | 06:00           | 111 0000b             | F0h         |
| Reserved                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                   | 07              | 1b                    |             |
| Soft Reset and Rescue Sequence Support                                               | Return the device to its default power-on state<br>♦ x1_xxxxb: issue reset enable instruction 66h, then issue reset instruction 99h.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 6Dh               | 13:08           | 01 0000b              | 50h         |
| Exit 4-Byte Addressing                                                               | <ul style="list-style-type: none"> <li>♦ xx_xxxx_xxx1b: issue instruction E9h to exit 4-Byte address mode (write enable instruction 06h is not required)</li> <li>♦ xx_xxxx_x1xxb: 8-bit volatile extended address register used to define A[31:A24] bits. Read with instruction C8h. Write instruction is C5h, data length is 1 byte. Return to lowest memory segment by setting A[31:24] to 00h and use 3-Byte addressing.</li> <li>♦ xx_xx1x_xxxxb: Hardware reset</li> <li>♦ xx_x1xx_xxxxb: Software reset (see bits 13:8 in this DWORD)</li> <li>♦ xx_1xxx_xxxxb: Power cycle</li> <li>♦ x1_xxxx_xxxxb: Reserved</li> <li>♦ 1x_xxxx_xxxxb: Reserved</li> </ul> |                   | 15:14           | 01b                   |             |
|                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 6Eh               | 23:16           | 1111 1001b            | F9h         |

SFDP Table below is for MX25L25645GM2I-10G, MX25L25645GMI-10G, MX25L25645GZ2I-10G, MX25L25645GZNI-10G, MX25L25645GM2I-08G, MX25L25645GMI-08G, MX25L25645GZ2I-08G, MX25L25645GZNI-08G, MX25L25645GXDI-08G, MX25L25645GXCI-08G and MX25L25645GXDI-10G

| Description             | Comment                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Add (h)<br>(Byte) | DW Add<br>(Bit) | Data (h/b)<br>(Note1) | Data<br>(h) |
|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|-----------------|-----------------------|-------------|
| Enter 4-Byte Addressing | <ul style="list-style-type: none"> <li>♦ xxxx_xxx1b: issue instruction B7h (preceding write enable not required)</li> <li>♦ xxxx_x1xxb: 8-bit volatile extended address register used to define A[31:24] bits. Read with instruction C8h. Write instruction is C5h with 1 byte of data. Select the active 128 Mbit memory segment by setting the appropriate A[31:24] bits and use 3-Byte addressing.</li> <li>♦ xx1x_xxxxb: Supports dedicated 4-Byte address instruction set. Consult vendor data sheet for the instruction set definition.</li> <li>♦ 1xxx_ xxxxb: Reserved</li> </ul> | 6Fh               | 31:24           | 1000 0101b            | 85h         |

**Table 18. Parameter Table (1): 4-Byte Instruction Tables**

SFDP Table below is for MX25L25645GM2I-10G, MX25L25645GMI-10G, MX25L25645GZ2I-10G, MX25L25645GZNI-10G, MX25L25645GM2I-08G, MX25L25645GMI-08G, MX25L25645GZ2I-08G, MX25L25645GZNI-08G, MX25L25645GXDI-08G, MX25L25645GXCI-08G and MX25L25645GXDI-10G

| Description                                                               | Comment                     | Add (h)<br>(Byte) | DW Add<br>(Bit) | Data (h/b)<br>(Note1) | Data<br>(h) |
|---------------------------------------------------------------------------|-----------------------------|-------------------|-----------------|-----------------------|-------------|
| Support for (1-1-1) READ Command, Instruction=13h                         | 0=not supported 1=supported | C0h               | 00              | 1b                    | 7Fh         |
| Support for (1-1-1) FAST_READ Command, Instruction=0Ch                    | 0=not supported 1=supported |                   | 01              | 1b                    |             |
| Support for (1-1-2) FAST_READ Command, Instruction=3Ch                    | 0=not supported 1=supported |                   | 02              | 1b                    |             |
| Support for (1-2-2) FAST_READ Command, Instruction=BCh                    | 0=not supported 1=supported |                   | 03              | 1b                    |             |
| Support for (1-1-4) FAST_READ Command, Instruction=6Ch                    | 0=not supported 1=supported |                   | 04              | 1b                    |             |
| Support for (1-4-4) FAST_READ Command, Instruction=ECh                    | 0=not supported 1=supported |                   | 05              | 1b                    |             |
| Support for (1-1-1) Page Program Command, Instruction=12h                 | 0=not supported 1=supported |                   | 06              | 1b                    |             |
| Support for (1-1-4) Page Program Command, Instruction=34h                 | 0=not supported 1=supported |                   | 07              | 0b                    |             |
| Support for (1-4-4) Page Program Command, Instruction=3Eh                 | 0=not supported 1=supported | C1h               | 08              | 1b                    | 8Fh         |
| Support for Erase Command – Type 1 size, Instruction lookup in next Dword | 0=not supported 1=supported |                   | 09              | 1b                    |             |
| Support for Erase Command – Type 2 size, Instruction lookup in next Dword | 0=not supported 1=supported |                   | 10              | 1b                    |             |
| Support for Erase Command – Type 3 size, Instruction lookup in next Dword | 0=not supported 1=supported |                   | 11              | 1b                    |             |
| Support for Erase Command – Type 4 size, Instruction lookup in next Dword | 0=not supported 1=supported |                   | 12              | 0b                    |             |
| Support for (1-1-1) DTR_Read Command, Instruction=0Eh                     | 0=not supported 1=supported |                   | 13              | 0b                    |             |
| Support for (1-2-2) DTR_Read Command, Instruction=BEh                     | 0=not supported 1=supported |                   | 14              | 0b                    |             |
| Support for (1-4-4) DTR_Read Command, Instruction=EEh                     | 0=not supported 1=supported |                   | 15              | 1b                    |             |

SFDP Table below is for MX25L25645GM2I-10G, MX25L25645GMI-10G, MX25L25645GZ2I-10G, MX25L25645GZNI-10G, MX25L25645GM2I-08G, MX25L25645GMI-08G, MX25L25645GZ2I-08G, MX25L25645GZNI-08G, MX25L25645GXDI-08G, MX25L25645GXCI-08G and MX25L25645GXDI-10G

| Description                                                                    | Comment                     | Add (h)<br>(Byte) | DW Add<br>(Bit) | Data (h/b)<br>(Note1) | Data<br>(h) |
|--------------------------------------------------------------------------------|-----------------------------|-------------------|-----------------|-----------------------|-------------|
| Support for volatile individual sector lock Read command, Instruction=E0h      | 0=not supported 1=supported | C2h               | 16              | 1b                    | FFh         |
| Support for volatile individual sector lock Write command, Instruction=E1h     | 0=not supported 1=supported |                   | 17              | 1b                    |             |
| Support for non-volatile individual sector lock read command, Instruction=E2h  | 0=not supported 1=supported |                   | 18              | 1b                    |             |
| Support for non-volatile individual sector lock write command, Instruction=E3h | 0=not supported 1=supported |                   | 19              | 1b                    |             |
| Reserved                                                                       | Reserved                    |                   | 23:20           | 1111b                 |             |
| Reserved                                                                       | Reserved                    | C3h               | 31:24           | FFh                   | FFh         |
| Instruction for Erase Type 1                                                   | FFh=not supported           | C4h               | 07:00           | 21h                   | 21h         |
| Instruction for Erase Type 2                                                   | FFh=not supported           | C5h               | 15:08           | 5Ch                   | 5Ch         |
| Instruction for Erase Type 3                                                   | FFh=not supported           | C6h               | 23:16           | DCh                   | DCh         |
| Instruction for Erase Type 4                                                   | FFh=not supported           | C7h               | 31:24           | FFh                   | FFh         |

**Table 19. Parameter Table (2): Macronix Flash Parameter Tables**

SFDP Table below is for MX25L25645GM2I-10G, MX25L25645GMI-10G, MX25L25645GZ2I-10G, MX25L25645GZNI-10G, MX25L25645GM2I-08G, MX25L25645GMI-08G, MX25L25645GZ2I-08G, MX25L25645GZNI-08G, MX25L25645GXDI-08G, MX25L25645GXCI-08G and MX25L25645GXDI-10G

| Description                                                       | Comment                                                                                                | Add (h)<br>(Byte) | DW Add<br>(Bit) | Data (h/b)<br>(Note1) | Data<br>(h) |
|-------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|-------------------|-----------------|-----------------------|-------------|
| Vcc Supply Maximum Voltage                                        | 2000h=2.000V<br>2700h=2.700V<br>3600h=3.600V                                                           | 111h:110h         | 07:00<br>15:08  | 00h<br>36h            | 00h<br>36h  |
| Vcc Supply Minimum Voltage                                        | 1650h=1.650V, 1750h=1.750V<br>2250h=2.250V, 2300h=2.300V<br>2350h=2.350V, 2650h=2.650V<br>2700h=2.700V | 113h: 112h        | 23:16<br>31:24  | 00h<br>27h            | 00h<br>27h  |
| H/W Reset# pin                                                    | 0=not supported 1=supported                                                                            | 115h: 114h        | 00              | 1b                    | F99Dh       |
| H/W Hold# pin                                                     | 0=not supported 1=supported                                                                            |                   | 01              | 0b                    |             |
| Deep Power Down Mode                                              | 0=not supported 1=supported                                                                            |                   | 02              | 1b                    |             |
| S/W Reset                                                         | 0=not supported 1=supported                                                                            |                   | 03              | 1b                    |             |
| S/W Reset Instruction                                             | Reset Enable (66h) should be issued before Reset Instruction                                           |                   | 11:04           | 1001 1001b (99h)      |             |
| Program Suspend/Resume                                            | 0=not supported 1=supported                                                                            |                   | 12              | 1b                    |             |
| Erase Suspend/Resume                                              | 0=not supported 1=supported                                                                            |                   | 13              | 1b                    |             |
| Unused                                                            |                                                                                                        |                   | 14              | 1b                    |             |
| Wrap-Around Read mode                                             | 0=not supported 1=supported                                                                            |                   | 15              | 1b                    |             |
| Wrap-Around Read mode Instruction                                 |                                                                                                        | 116h              | 23:16           | C0h                   | C0h         |
| Wrap-Around Read data length                                      | 08h:support 8B wrap-around read<br>16h:8B&16B<br>32h:8B&16B&32B<br>64h:8B&16B&32B&64B                  | 117h              | 31:24           | 64h                   | 64h         |
| Individual block lock                                             | 0=not supported 1=supported                                                                            | 11Bh: 118h        | 00              | 1b                    | CB85h       |
| Individual block lock bit (Volatile/Nonvolatile)                  | 0=Volatile 1=Nonvolatile                                                                               |                   | 01              | 0b                    |             |
| Individual block lock Instruction                                 |                                                                                                        |                   | 09:02           | 1110 0001b (E1h)      |             |
| Individual block lock Volatile protect bit default protect status | 0=protect 1=unprotect                                                                                  |                   | 10              | 0b                    |             |
| Secured OTP                                                       | 0=not supported 1=supported                                                                            |                   | 11              | 1b                    |             |
| Read Lock                                                         | 0=not supported 1=supported                                                                            |                   | 12              | 0b                    |             |
| Permanent Lock                                                    | 0=not supported 1=supported                                                                            |                   | 13              | 0b                    |             |
| Unused                                                            |                                                                                                        |                   | 15:14           | 11b                   |             |
| Unused                                                            |                                                                                                        |                   | 31:16           | FFh                   | FFh         |
| Unused                                                            |                                                                                                        | 11Fh: 11Ch        | 31:00           | FFh                   | FFh         |



Note 1: h/b is hexadecimal or binary.

Note 2: **(x-y-z)** means I/O mode nomenclature used to indicate the number of active pins used for the opcode (x), address (y), and data (z). At the present time, the only valid Read SFDP instruction modes are: (1-1-1), (2-2-2), and (4-4-4)

Note 3: **Wait States** is required dummy clock cycles after the address bits or optional mode bits.

Note 4: **Mode Bits** is optional control bits that follow the address bits. These bits are driven by the system controller if they are specified. (eg, read performance enhance toggling bits)

Note 5: 4KB=2<sup>0Ch</sup>, 32KB=2<sup>0Fh</sup>, 64KB=2<sup>10h</sup>

Note 6: All unused and undefined area data is blank FFh for SFDP Tables that are defined in Parameter Identification Header. All other areas beyond defined SFDPTable are reserved by Macronix.

## 10. RESET


Driving the RESET# pin low for a period of  $t_{RLRH}$  or longer will reset the device. After the reset cycle, the device is in the following states:

- Standby mode
- All the volatile bits such as WEL/WIP/SRAM lock bit will return to the default status as power on.
- 3-byte address mode

If the device is under programming or erasing, driving the RESET# pin low will also terminate the operation and data could be lost. During the resetting cycle, the SO data becomes high impedance and the current will be reduced to minimum.

While Reset operation is during erase suspend, no matter what status the flash device is in, its Reset Recovery time should be referred to the Recovery time of the Erase activity in progress.

**Figure 91. RESET Timing**

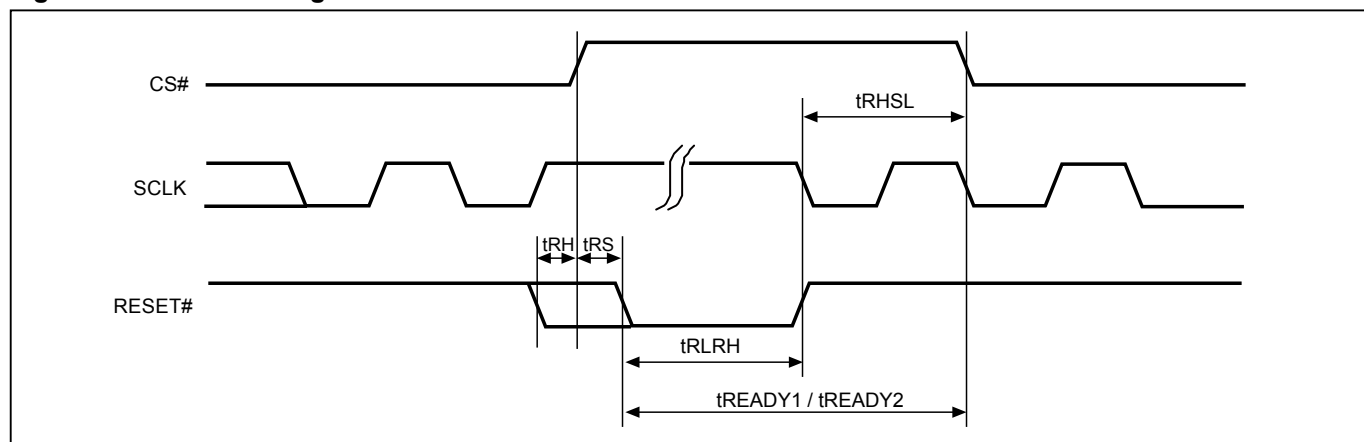

**Table 20. Reset Timing-(Power On)**

| Symbol       | Parameter                  | Min. | Typ. | Max. | Unit |
|--------------|----------------------------|------|------|------|------|
| $t_{RHSL}$   | Reset# high before CS# low | 10   |      |      | us   |
| $t_{RS}$     | Reset# setup time          | 15   |      |      | ns   |
| $t_{RH}$     | Reset# hold time           | 15   |      |      | ns   |
| $t_{RLRH}$   | Reset# low pulse width     | 10   |      |      | us   |
| $t_{READY1}$ | Reset Recovery time        | 35   |      |      | us   |

**Table 21. Reset Timing-(Other Operation)**

| Symbol       | Parameter                                         | Min. | Typ. | Max. | Unit |
|--------------|---------------------------------------------------|------|------|------|------|
| $t_{RHSL}$   | Reset# high before CS# low                        | 10   |      |      | us   |
| $t_{RS}$     | Reset# setup time                                 | 15   |      |      | ns   |
| $t_{RH}$     | Reset# hold time                                  | 15   |      |      | ns   |
| $t_{RLRH}$   | Reset# low pulse width                            | 10   |      |      | us   |
| $t_{READY2}$ | Reset Recovery time (During instruction decoding) | 40   |      |      | us   |
|              | Reset Recovery time (for read operation)          | 35   |      |      | us   |
|              | Reset Recovery time (for program operation)       | 310  |      |      | us   |
|              | Reset Recovery time (for SE4KB operation)         | 12   |      |      | ms   |
|              | Reset Recovery time (for BE64KB/BE32KB operation) | 25   |      |      | ms   |
|              | Reset Recovery time (for Chip Erase operation)    | 100  |      |      | ms   |
|              | Reset Recovery time (for WRSR operation)          | 40   |      |      | ms   |

**Note:** For the Reset activity during Erase suspend, its  $t_{READY2}$  timing should be referred to the Erase activity in progress.

## 11. POWER-ON STATE

The device is in the states below when power-up:

- Standby mode (please note it is not deep power-down mode)
- Write Enable Latch (WEL) bit is reset

The device must not be selected during power-up and power-down stage until the VCC reaches the following levels:

- VCC minimum at power-up stage and then after a delay of tVSL
- GND at power-down

Please note that a pull-up resistor on CS# may ensure a safe and proper power-up/down level.

An internal power-on reset (POR) circuit may protect the device from data corruption and inadvertent data change during power up state. When VCC is lower than VWI (POR threshold voltage value), the internal logic is reset and the flash device has no response to any command.

For further protection on the device, if the VCC does not reach the VCC minimum level, the correct operation is not guaranteed. The write, erase, and program command should be sent after the below time delay:

- tVSL after VCC reached VCC minimum level

The device can accept read command after VCC reached VCC minimum and a time delay of tVSL.

Please refer to the ["Figure 99. Power-up Timing"](#).

### Note:

- To stabilize the VCC level, the VCC rail decoupled by a suitable capacitor close to package pins is recommended. (generally around 0.1uF)
- At power-down stage, the VCC drops below VWI level, all operations are disable and device has no response to any command. The data corruption might occur during this stage if a write, program, erase cycle is in progress.

## 12. ELECTRICAL SPECIFICATIONS


**Table 22. ABSOLUTE MAXIMUM RATINGS**

| RATING                        |                  | VALUE             |
|-------------------------------|------------------|-------------------|
| Ambient Operating Temperature | Industrial grade | -40°C to 85°C     |
| Storage Temperature           |                  | -65°C to 150°C    |
| Applied Input Voltage         |                  | -0.5V to VCC+0.5V |
| Applied Output Voltage        |                  | -0.5V to VCC+0.5V |
| VCC to Ground Potential       |                  | -0.5V to 4.0V     |


**NOTICE:**

1. Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is stress rating only and functional operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended period may affect reliability.
2. Specifications contained within the following tables are subject to change.
3. During voltage transitions, all pins may overshoot to VCC+2.0V or -2.0V for period up to 20ns, and please refer to "[Figure 92. Maximum Negative Overshoot Waveform](#)" and "[Figure 93. Maximum Positive Overshoot Waveform](#)".

**Figure 92. Maximum Negative Overshoot Waveform**

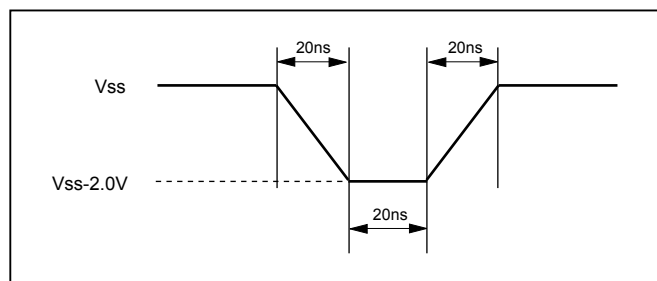


**Figure 93. Maximum Positive Overshoot Waveform**

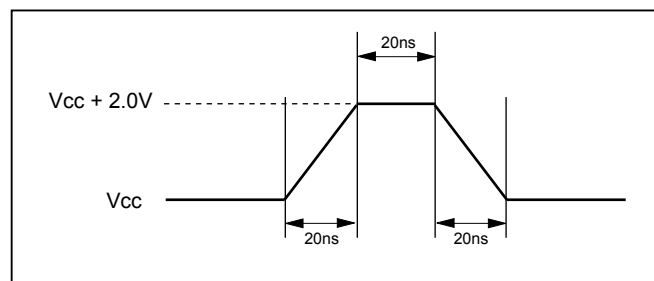


**Table 23. CAPACITANCE TA = 25°C, f = 1.0 MHz**

| Symbol | Parameter          | Min. | Typ. | Max. | Unit | Conditions |
|--------|--------------------|------|------|------|------|------------|
| CIN    | Input Capacitance  |      |      | 8    | pF   | VIN = 0V   |
| COU    | Output Capacitance |      |      | 10   | pF   | VOU = 0V   |


**Figure 94. DATA INPUT TEST WAVEFORMS AND MEASUREMENT LEVEL**

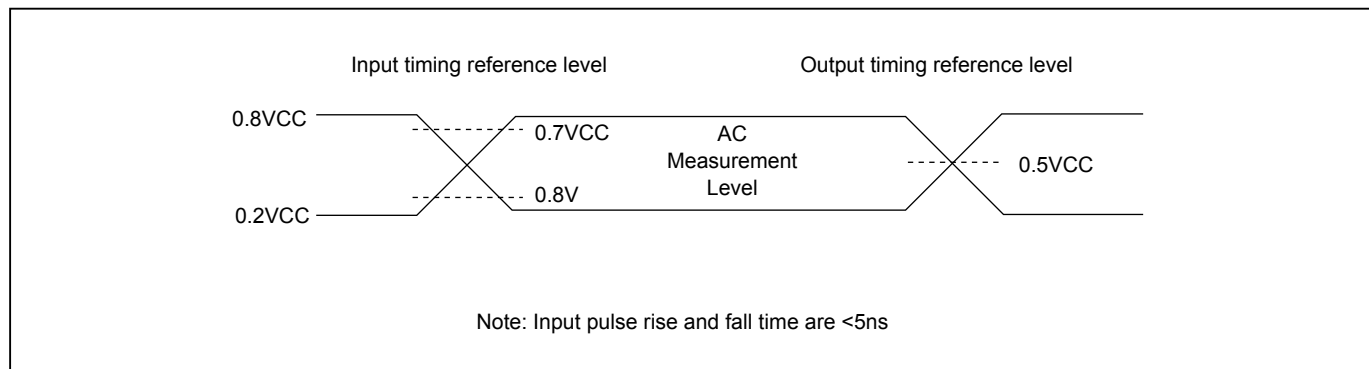

**Figure 95. OUTPUT LOADING**

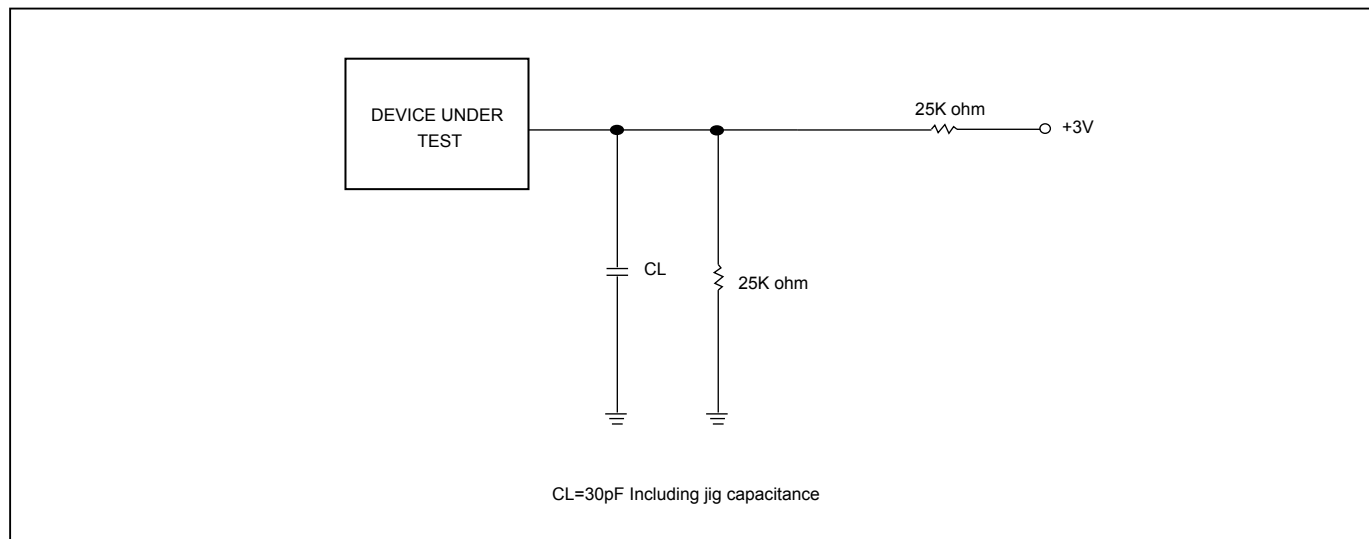

**Figure 96. SCLK TIMING DEFINITION**

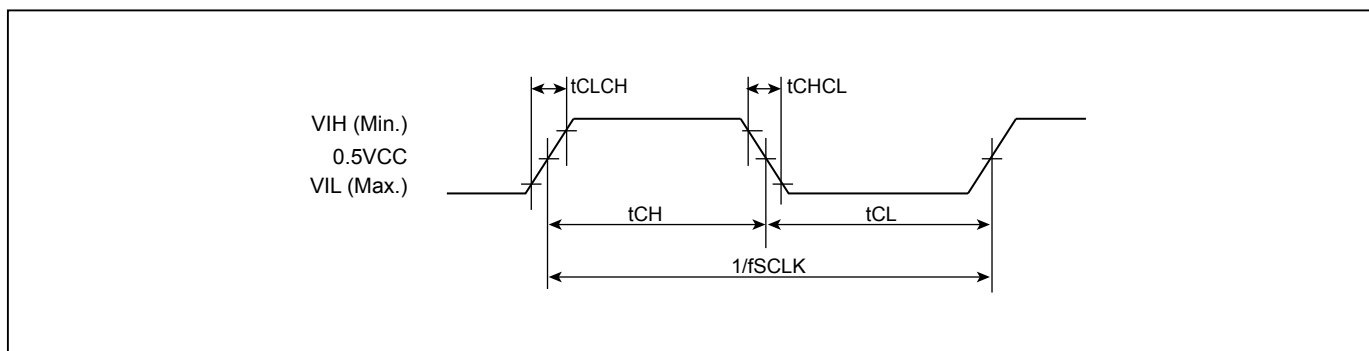

**Table 24. DC CHARACTERISTICS (Temperature = -40°C to 85°C, VCC = 2.7V - 3.6V)**

| Symbol | Parameter                                               | Notes | Min.    | Typ. | Max.    | Units | Test Conditions                                                |
|--------|---------------------------------------------------------|-------|---------|------|---------|-------|----------------------------------------------------------------|
| ILI    | Input Load Current                                      | 1     |         |      | ±2      | μA    | VCC = VCC Max,<br>VIN = VCC or GND                             |
| ILO    | Output Leakage Current                                  | 1     |         |      | ±2      | μA    | VCC = VCC Max,<br>VOU = VCC or GND                             |
| ISB1   | VCC Standby Current                                     | 1     |         | 15   | 100     | μA    | VIN = VCC or GND,<br>CS# = VCC                                 |
| ISB2   | Deep Power-down Current                                 |       |         | 3    | 20      | μA    | VIN = VCC or GND,<br>CS# = VCC                                 |
| ICC1   | VCC Read                                                | 1     |         | 16   | 30      | mA    | f=100MHz, (DTR 4 x I/O read)<br>SCLK=0.1VCC/0.9VCC,<br>SO=Open |
|        |                                                         |       |         | 14   | 25      | mA    | f=133MHz, (4 x I/O read)<br>SCLK=0.1VCC/0.9VCC,<br>SO=Open     |
|        |                                                         |       |         | 12   | 20      | mA    | f=104MHz, (4 x I/O read)<br>SCLK=0.1VCC/0.9VCC,<br>SO=Open     |
|        |                                                         |       |         | 12   | 15      | mA    | f=84MHz,<br>SCLK=0.1VCC/0.9VCC,<br>SO=Open                     |
| ICC2   | VCC Program Current (PP)                                | 1     |         | 12   | 25      | mA    | Program in Progress,<br>CS# = VCC                              |
| ICC3   | VCC Write Status Register (WRSR) Current                |       |         | 10   | 12      | mA    | Program status register in progress, CS#=VCC                   |
| ICC4   | VCC Sector/Block (32K, 64K) Erase Current (SE/BE/BE32K) | 1     |         | 10   | 25      | mA    | Erase in Progress, CS#=VCC                                     |
| ICC5   | VCC Chip Erase Current (CE)                             | 1     |         | 14   | 25      | mA    | Erase in Progress, CS#=VCC                                     |
| VIL    | Input Low Voltage                                       |       | -0.5    |      | 0.8     | V     |                                                                |
| VIH    | Input High Voltage                                      |       | 0.7VCC  |      | VCC+0.4 | V     |                                                                |
| VOL    | Output Low Voltage                                      |       |         |      | 0.2     | V     | IOL = 100μA                                                    |
| VOH    | Output High Voltage                                     |       | VCC-0.2 |      |         | V     | IOH = -100μA                                                   |

**Notes :**

1. Typical values at VCC = 3.3V, T = 25°C. These currents are valid for all product versions (package and speeds).
2. Typical value is calculated by simulation.

**Table 25. AC CHARACTERISTICS (Temperature = -40°C to 85°C, VCC = 2.7V - 3.6V)**

| Symbol                         | Alt. | Parameter                                                  | Min.                                                               | Typ.                    | Max.                    | Unit |
|--------------------------------|------|------------------------------------------------------------|--------------------------------------------------------------------|-------------------------|-------------------------|------|
| fSCLK                          | fC   | Clock Frequency for all commands (except Read)             | D.C.                                                               |                         | 120/133 <sup>(11)</sup> | MHz  |
| fRCLK                          | fR   | Clock Frequency for READ instructions                      |                                                                    |                         | 50                      | MHz  |
| fTCLK                          | fT   | Clock Frequency for 2READ/DREAD instructions               | Please refer to "Table 10. Dummy Cycle and Frequency Table (MHz)". |                         |                         | MHz  |
|                                | fQ   | Clock Frequency for 4READ/QREAD instructions               |                                                                    |                         |                         | MHz  |
| tCH <sup>(1)</sup>             | tCLH | Clock High Time                                            | Others (fSCLK/fTCLK)                                               | > 66MHz                 | 45% x (1/fSCLK)         | ns   |
|                                |      |                                                            |                                                                    | ≤ 66MHz                 | 7                       | ns   |
|                                |      |                                                            | Normal Read (fRCLK)                                                |                         | 7                       | ns   |
| tCL <sup>(1)</sup>             | tCLL | Clock Low Time                                             | Others (fSCLK/fTCLK)                                               | > 66MHz                 | 45% x (1/fSCLK)         | ns   |
|                                |      |                                                            |                                                                    | ≤ 66MHz                 | 7                       | ns   |
|                                |      |                                                            | Normal Read (fRCLK)                                                |                         | 7                       | ns   |
| tCLCH <sup>(5)</sup>           |      | Clock Rise Time (peak to peak)                             |                                                                    | 0.1                     |                         | V/ns |
| tCHCL <sup>(5)</sup>           |      | Clock Fall Time (peak to peak)                             |                                                                    | 0.1                     |                         | V/ns |
| tSLCH                          | tCSS | CS# Active Setup Time (relative to SCLK)                   |                                                                    | 3                       |                         | ns   |
| tCHSL                          |      | CS# Not Active Hold Time (relative to SCLK)                |                                                                    | 3                       |                         | ns   |
| tDVCH/<br>tDVCL                | tDSU | Data In Setup Time                                         |                                                                    | 2                       |                         | ns   |
| tCHDX/<br>tCLDX <sup>(9)</sup> | tDH  | Data In Hold Time                                          | VCC: 2.7V - 3.6V                                                   | 2                       |                         | ns   |
|                                |      |                                                            | VCC: 3.0V - 3.6V<br>(Loading: 15pF/10pF)                           | 1                       |                         | ns   |
| tCHSH                          |      | CS# Active Hold Time (relative to SCLK)                    |                                                                    | 3                       |                         | ns   |
| tSHCH                          |      | CS# Not Active Setup Time (relative to SCLK)               |                                                                    | 3                       |                         | ns   |
| tSHSL                          | tCSH | CS# Deselect Time                                          | From Read to next Read                                             | 7                       |                         | ns   |
|                                |      |                                                            | From Write/Erase/Program to Read Status Register                   | 30                      |                         | ns   |
| tSHQZ <sup>(5)</sup>           | tDIS | Output Disable Time                                        |                                                                    |                         | 8                       | ns   |
| tCLQV <sup>(9)</sup>           | tV   | Clock Low to Output Valid Loading                          | VCC: 2.7V - 3.6V                                                   | Loading: 30pF           | 8                       | ns   |
|                                |      |                                                            |                                                                    | Loading: 15pF           | 6                       | ns   |
|                                |      |                                                            |                                                                    | Loading: 10pF           | 5                       | ns   |
|                                |      |                                                            | VCC: 3.0V - 3.6V <sup>(10)</sup>                                   | Loading: 15pF ODS (0,0) | 5                       | ns   |
|                                |      |                                                            |                                                                    | Loading: 10pF ODS (0,0) | 4.5                     | ns   |
| tCLQX <sup>(9)</sup>           | tHO  | Output Hold Time                                           | Loading: 30pF                                                      | 1                       |                         | ns   |
|                                |      |                                                            | Loading: 15pF/10pF                                                 | 1                       |                         | ns   |
| tWHS <sup>(3)</sup>            |      | Write Protect Setup Time                                   |                                                                    | 20                      |                         | ns   |
| tSHWL <sup>(3)</sup>           |      | Write Protect Hold Time                                    |                                                                    | 100                     |                         | ns   |
| tDP <sup>(5)</sup>             |      | CS# High to Deep Power-down Mode                           |                                                                    |                         | 10                      | us   |
| tRES1 <sup>(5)</sup>           |      | CS# High to Standby Mode without Electronic Signature Read |                                                                    |                         | 30                      | us   |
| tRES2 <sup>(5)</sup>           |      | CS# High to Standby Mode with Electronic Signature Read    |                                                                    |                         | 30                      | us   |
| tW                             |      | Write Status/Configuration Register Cycle Time             |                                                                    |                         | 40                      | ms   |
| tWREAW                         |      | Write Extended Address Register                            |                                                                    | 40                      |                         | ns   |
| tBP                            |      | Byte-Program                                               |                                                                    | 15                      | 30                      | us   |
| tPP                            |      | Page Program Cycle Time                                    |                                                                    | 0.25                    | 0.75                    | ms   |
| tSE                            |      | Sector Erase Cycle Time                                    |                                                                    | 30                      | 400                     | ms   |
| tBE32                          |      | Block Erase (32KB) Cycle Time                              |                                                                    | 180                     | 1000                    | ms   |
| tBE                            |      | Block Erase (64KB) Cycle Time                              |                                                                    | 380                     | 2000                    | ms   |
| tCE                            |      | Chip Erase Cycle Time                                      |                                                                    | 110                     | 210                     | s    |
| tESL <sup>(6)</sup>            |      | Erase Suspend Latency                                      |                                                                    |                         | 25                      | us   |
| tPSL <sup>(6)</sup>            |      | Program Suspend Latency                                    |                                                                    |                         | 25                      | us   |
| tPRS <sup>(7)</sup>            |      | Latency between Program Resume and next Suspend            | 0.3                                                                | 100                     |                         | us   |
| tERS <sup>(8)</sup>            |      | Latency between Erase Resume and next Suspend              | 0.3                                                                | 400                     |                         | us   |
| tQVD <sup>(9)</sup>            |      | Data Output Valid Time Difference among all SIO pins       |                                                                    |                         | 600                     | ps   |

**Notes:**

1.  $t_{CH} + t_{CL}$  must be greater than or equal to  $1/\text{Frequency}$ .
2. Typical values given for  $T_A=25^{\circ}\text{C}$ . Not 100% tested.
3. Only applicable as a constraint for a WRSR instruction when SRWD is set at 1.
4. Test condition is shown as *"Figure 94. DATA INPUT TEST WAVEFORMS AND MEASUREMENT LEVEL"* and *"Figure 95. OUTPUT LOADING"*.
5. The value guaranteed by characterization, not 100% tested in production.
6. Latency time is required to complete Erase/Program Suspend operation until WIP bit is "0".
7. For  $t_{PRS}$ , minimum timing must be observed before issuing the next program suspend command. However, a period equal to or longer than the typical timing is required in order for the program operation to make progress.
8. For  $t_{ERS}$ , minimum timing must be observed before issuing the next erase suspend command. However, a period equal to or longer than the typical timing is required in order for the erase operation to make progress.
9. Not 100% tested.
10. For  $t_{CLQV}$ , please note that the output driver strength (ODS1, ODS0) bits must be configured correctly according to *"Table 9. Output Driver Strength Table"*.
11. 133MHz is valid for  $V_{CC} = 3.0\text{V}-3.6\text{V}$ .


### 13. OPERATING CONDITIONS

#### At Device Power-Up and Power-Down

AC timing illustrated in [Figure 97](#) and [Figure 98](#) are for the supply voltages and the control signals at device power-up and power-down. If the timing in the figures is ignored, the device will not operate correctly.

During power-up and power-down, CS# needs to follow the voltage applied on VCC to keep the device not to be selected. The CS# can be driven low when VCC reach Vcc(min.) and wait a period of tVSL.

**Figure 97. AC Timing at Device Power-Up**

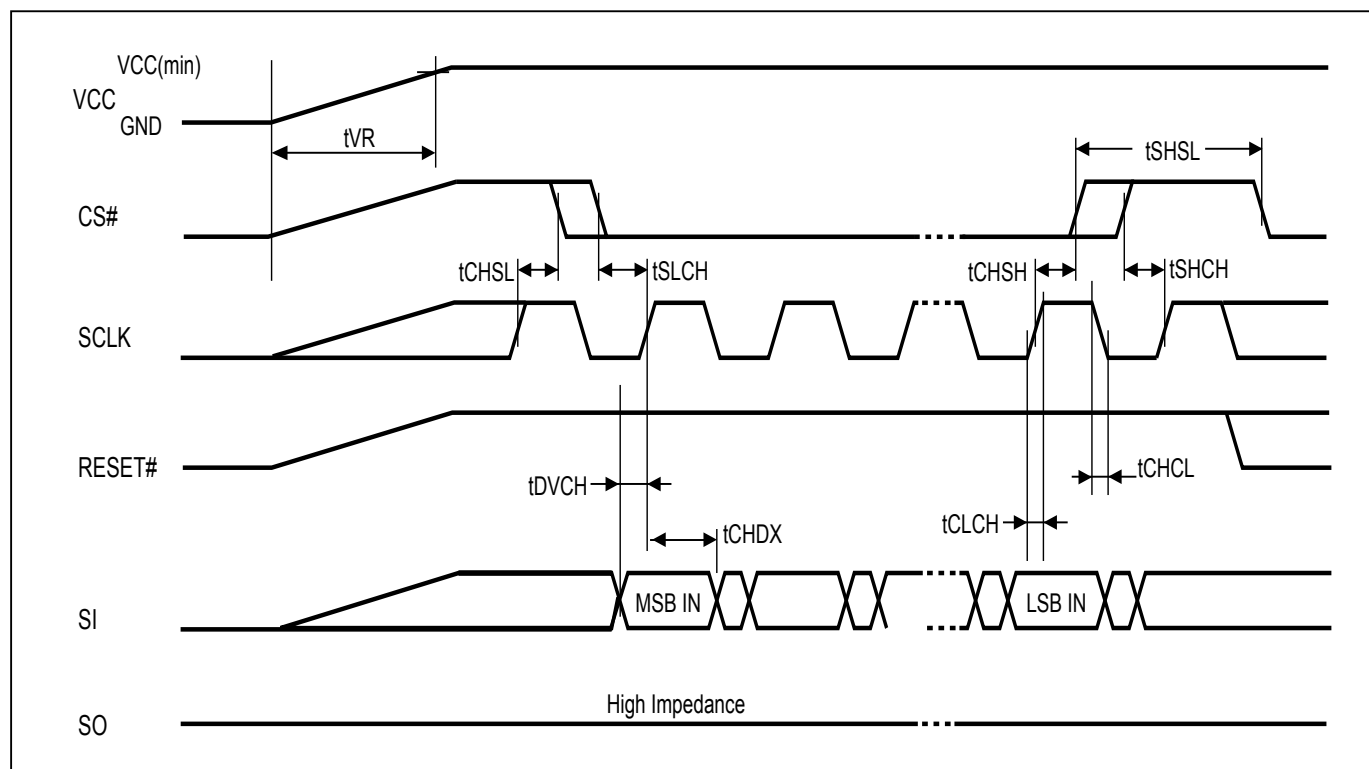


| Symbol | Parameter     | Notes | Min. | Max.   | Unit |
|--------|---------------|-------|------|--------|------|
| tVR    | VCC Rise Time | 1     |      | 500000 | us/V |

**Notes:**


1. Sampled, not 100% tested.
2. For AC spec tCHSL, tSLCH, tDVCH, tCHDX, tSHSL, tCHSH, tSHCH, tCHCL, tCLCH in the figure, please refer to "[Table 25. AC CHARACTERISTICS \(Temperature = -40°C to 85°C, VCC = 2.7V - 3.6V\)](#)".

**Figure 98. Power-Down Sequence**

During power-down, CS# needs to follow the voltage drop on VCC to avoid mis-operation.

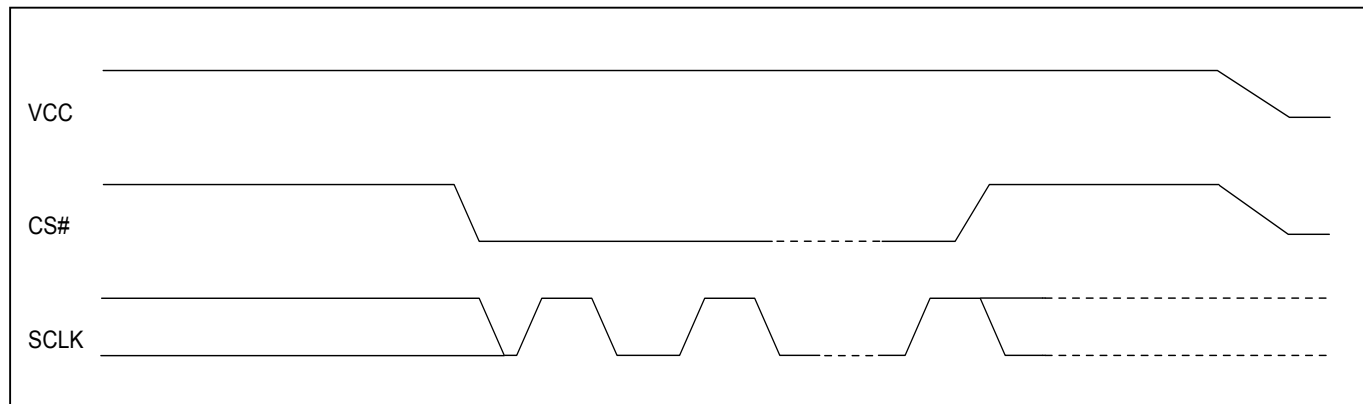


**Figure 99. Power-up Timing**

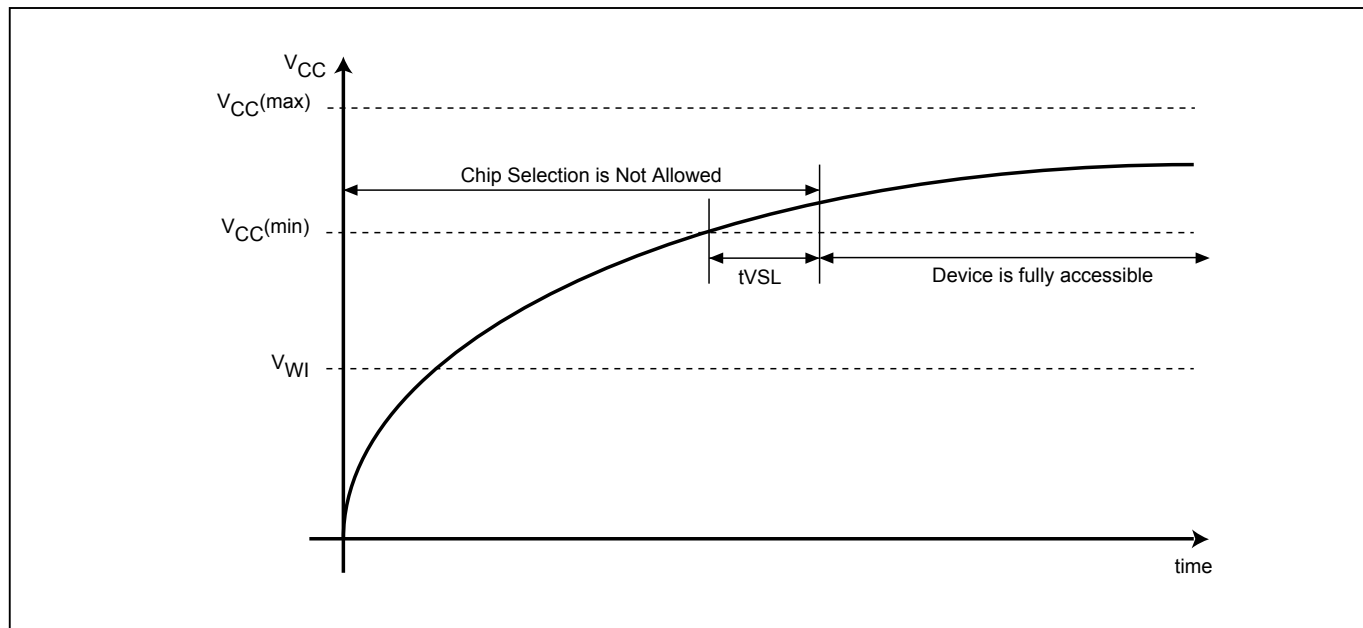

**Figure 100. Power Up/Down and Voltage Drop**

When powering down the device, VCC must drop below  $V_{PWD}$  for at least  $t_{PWD}$  to ensure the device will initialize correctly during power up. Please refer to "Figure 100. Power Up/Down and Voltage Drop" and "Table 26. Power-Up/Down Voltage and Timing" below for more details.

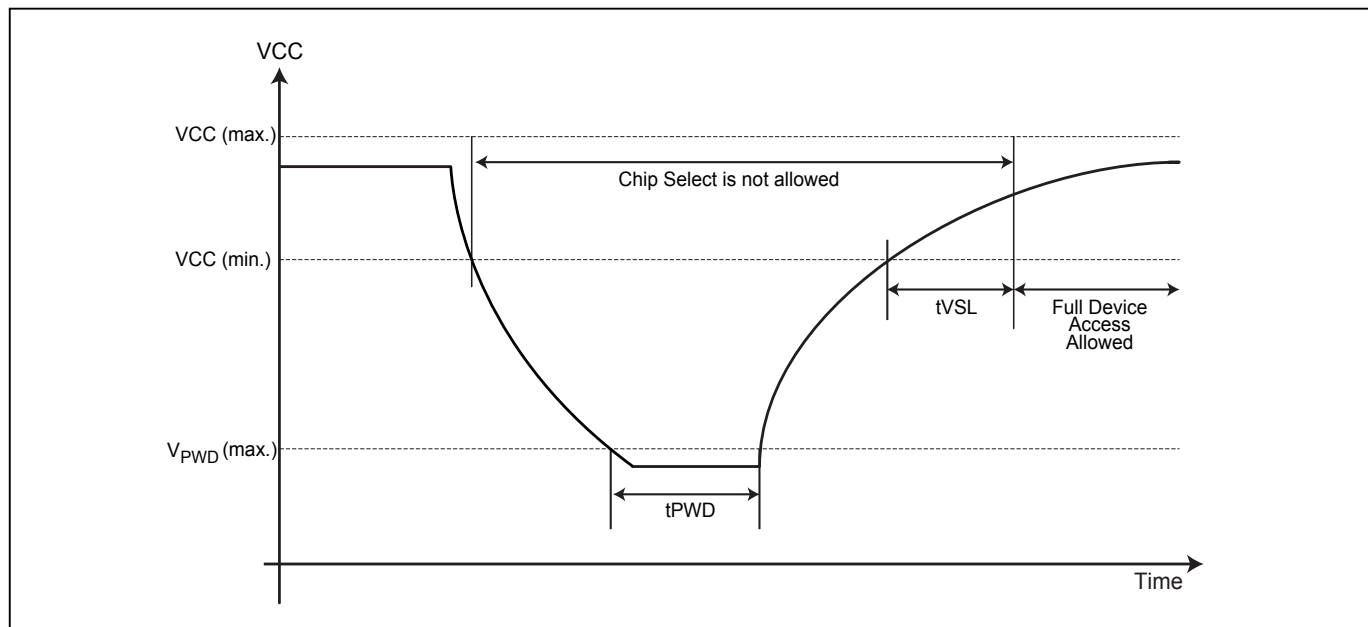

**Table 26. Power-Up/Down Voltage and Timing**

| Symbol    | Parameter                                                                    | Min. | Max.   | Unit |
|-----------|------------------------------------------------------------------------------|------|--------|------|
| $t_{VSL}$ | VCC(min.) to device operation                                                | 3000 |        | us   |
| VWI       | Write Inhibit Voltage                                                        | 1.5  | 2.5    | V    |
| $V_{PWD}$ | VCC voltage needed to below $V_{PWD}$ for ensuring initialization will occur |      | 0.9    | V    |
| $t_{PWD}$ | The minimum duration for ensuring initialization will occur                  | 300  |        | us   |
| $t_{VR}$  | VCC Rise Time                                                                |      | 500000 | us/V |
| VCC       | VCC Power Supply                                                             | 2.7  | 3.6    | V    |

**Note:** These parameters are characterized only.

### 13-1. INITIAL DELIVERY STATE

The device is delivered with the memory array erased: all bits are set to 1 (each byte contains FFh). The Status Register contains 00h (all Status Register bits are 0).

**14. ERASE AND PROGRAMMING PERFORMANCE**

| Parameter                                    | Min. | Typ. <sup>(1)</sup> | Max. <sup>(2)</sup> | Unit   |
|----------------------------------------------|------|---------------------|---------------------|--------|
| Write Status Register Cycle Time             |      |                     | 40                  | ms     |
| Sector Erase Cycle Time (4KB)                |      | 30                  | 400                 | ms     |
| Block Erase Cycle Time (32KB)                |      | 0.18                | 1                   | s      |
| Block Erase Cycle Time (64KB)                |      | 0.38                | 2                   | s      |
| Chip Erase Cycle Time                        |      | 110                 | 210                 | s      |
| Byte Program Time (via page program command) |      | 15                  | 30                  | us     |
| Page Program Time                            |      | 0.25                | 0.75                | ms     |
| Erase/Program Cycle                          |      | 100,000             |                     | cycles |

Note:

1. Typical program and erase time assumes the following conditions: 25°C, 3.3V, and all zero pattern.
2. Under worst conditions of 2.7V, highest operation temperature, post program/erase cycling.
3. System-level overhead is the time required to execute the first-bus-cycle sequence for the programming command.

**15. ERASE AND PROGRAMMING PERFORMANCE (Factory Mode)**

| Parameter                     | Min. | Typ. | Max. | Unit   |
|-------------------------------|------|------|------|--------|
| Sector Erase Cycle Time (4KB) |      | 18   |      | ms     |
| Block Erase Cycle Time (32KB) |      | 100  |      | ms     |
| Block Erase Cycle Time (64KB) |      | 200  |      | ms     |
| Chip Erase Cycle Time         |      | 80   |      | s      |
| Page Program Time             |      | 0.16 |      | ms     |
| Erase/Program Cycle           |      |      | 50   | cycles |

**Notice:**

1. Factory Mode must be operated in 20°C to 45°C and VCC 3.0V-3.6V.
2. In Factory mode, the Erase/Program operation should not exceed 50 cycles, and "ERASE AND PROGRAMMING PERFORMANCE" 100k cycles will not be affected.
3. During factory mode, Suspend command (B0h) cannot be executed.

**16. DATA RETENTION**

| Parameter      | Condition | Min. | Max. | Unit  |
|----------------|-----------|------|------|-------|
| Data retention | 55°C      | 20   |      | years |

**17. LATCH-UP CHARACTERISTICS**

|                                                                                        | Min.   | Max.       |
|----------------------------------------------------------------------------------------|--------|------------|
| Input Voltage with respect to GND on all power pins                                    |        | 1.5 VCCmax |
| Input Current on all non-power pins                                                    | -100mA | +100mA     |
| Test conditions: VCC = VCCmax, one pin at a time (compliant to JEDEC JESD78 standard). |        |            |




## 18. ORDERING INFORMATION

Please contact Macronix regional sales for the latest product selection and available form factors.

| PART NO.           | TEMPERATURE   | PACKAGE                         | Remark               |
|--------------------|---------------|---------------------------------|----------------------|
| MX25L25645GMI-10G  | -40°C to 85°C | 16-SOP (300mil)                 |                      |
| MX25L25645GM2I-10G | -40°C to 85°C | 8-SOP(200mil)                   |                      |
| MX25L25645GZ2I-10G | -40°C to 85°C | 8-WSON (8x6mm)                  |                      |
| MX25L25645GZNI-10G | -40°C to 85°C | 8-WSON (6x5mm)                  |                      |
| MX25L25645GXDI-10G | -40°C to 85°C | 24-Ball BGA<br>(5x5 ball array) |                      |
| MX25L25645GMI-08G  | -40°C to 85°C | 16-SOP (300mil)                 | Support Factory Mode |
| MX25L25645GM2I-08G | -40°C to 85°C | 8-SOP (200mil)                  | Support Factory Mode |
| MX25L25645GZ2I-08G | -40°C to 85°C | 8-WSON (8x6mm)                  | Support Factory Mode |
| MX25L25645GZNI-08G | -40°C to 85°C | 8-WSON (6x5mm)                  | Support Factory Mode |
| MX25L25645GXCI-08G | -40°C to 85°C | 24-Ball BGA<br>(4x6 ball array) | Support Factory Mode |
| MX25L25645GXDI-08G | -40°C to 85°C | 24-Ball BGA<br>(5x5 ball array) | Support Factory Mode |


## 19. PART NAME DESCRIPTION

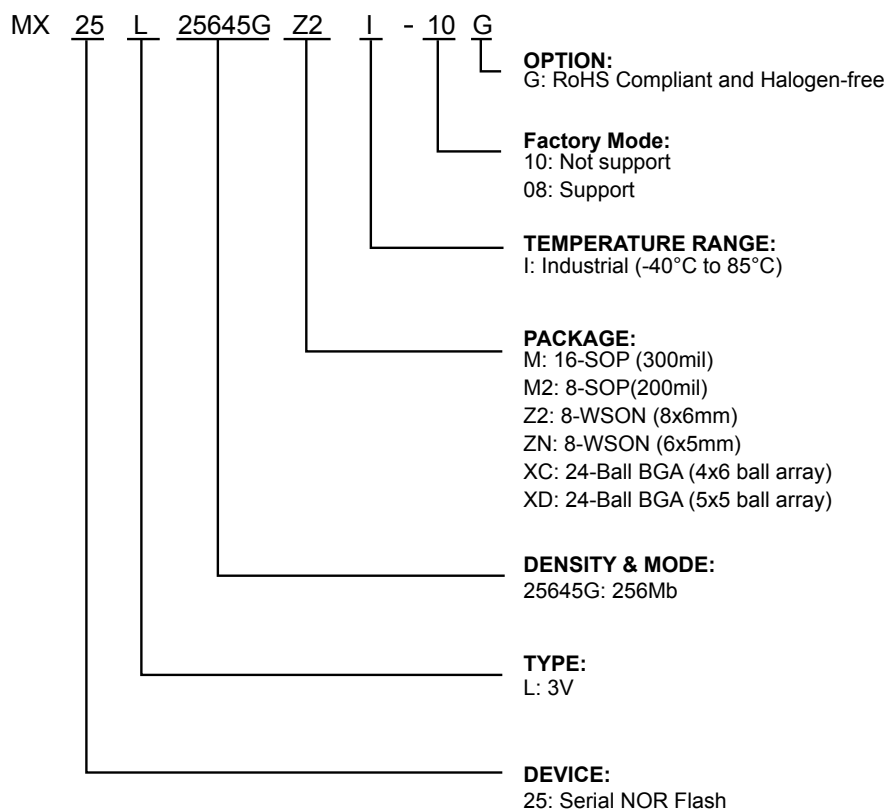

## 20. PACKAGE INFORMATION

### 20-1. 16-pin SOP (300mil)

Doc. Title: Package Outline for SOP 16L (300MIL)

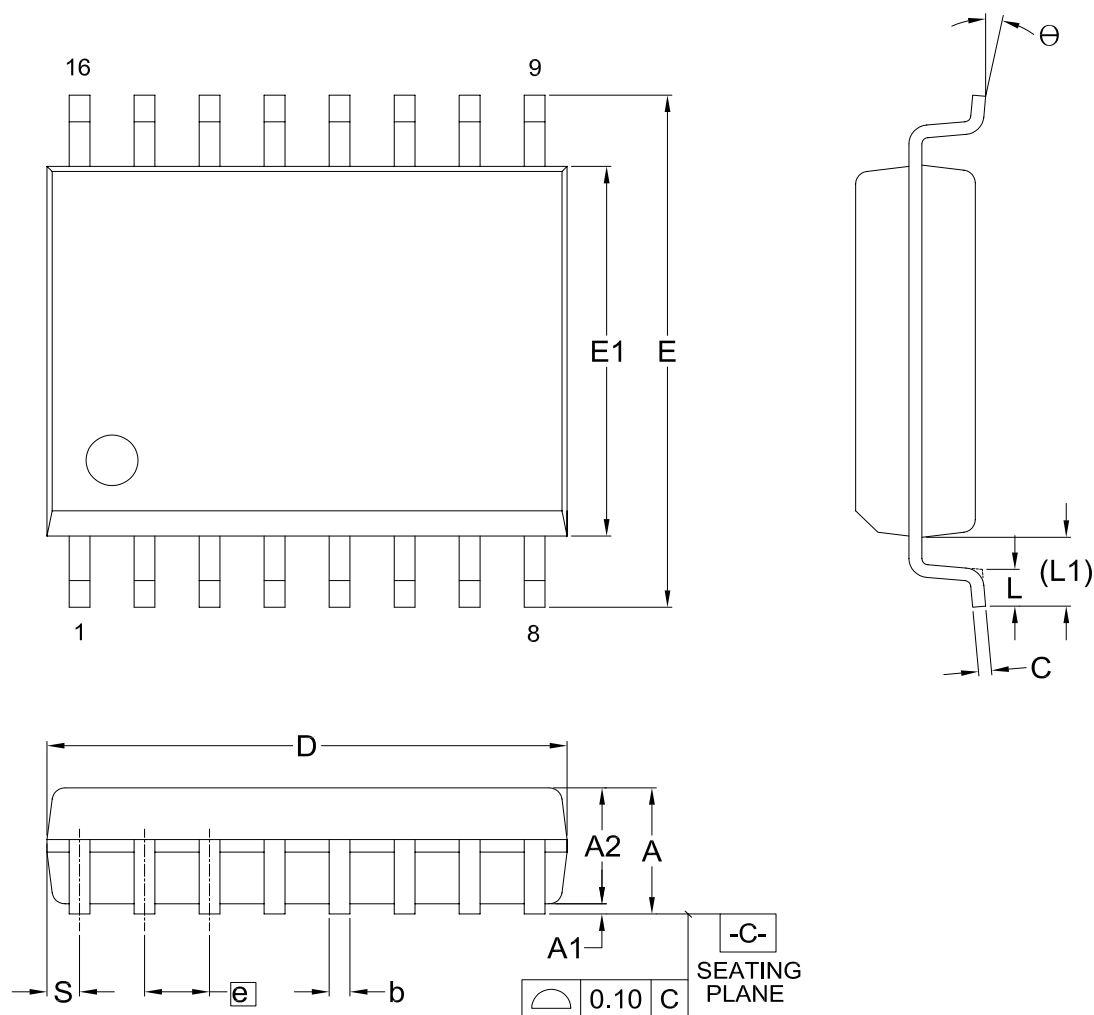


Dimensions (inch dimensions are derived from the original mm dimensions)

| SYMBOL<br>UNIT |      | A     | A1    | A2    | b     | C     | D     | E     | E1    | e     | L     | L1    | S     | Θ  |
|----------------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|----|
| mm             | Min. | —     | 0.10  | 2.25  | 0.31  | 0.20  | 10.10 | 10.10 | 7.42  | —     | 0.40  | 1.31  | 0.51  | 0° |
|                | Nom. | —     | 0.20  | 2.35  | 0.41  | 0.25  | 10.30 | 10.30 | 7.52  | 1.27  | 0.84  | 1.44  | 0.64  | 5° |
|                | Max. | 2.65  | 0.30  | 2.45  | 0.51  | 0.30  | 10.50 | 10.50 | 7.60  | —     | 1.27  | 1.57  | 0.77  | 8° |
| Inch           | Min. | —     | 0.004 | 0.089 | 0.012 | 0.008 | 0.397 | 0.397 | 0.292 | —     | 0.016 | 0.052 | 0.020 | 0° |
|                | Nom. | —     | 0.008 | 0.093 | 0.016 | 0.010 | 0.405 | 0.405 | 0.296 | 0.050 | 0.033 | 0.057 | 0.025 | 5° |
|                | Max. | 0.104 | 0.012 | 0.096 | 0.020 | 0.012 | 0.413 | 0.413 | 0.299 | —     | 0.050 | 0.062 | 0.030 | 8° |

**20-2. 8-pins SOP (200mil)**

Doc. Title: Package Outline for SOP 8L 200MIL

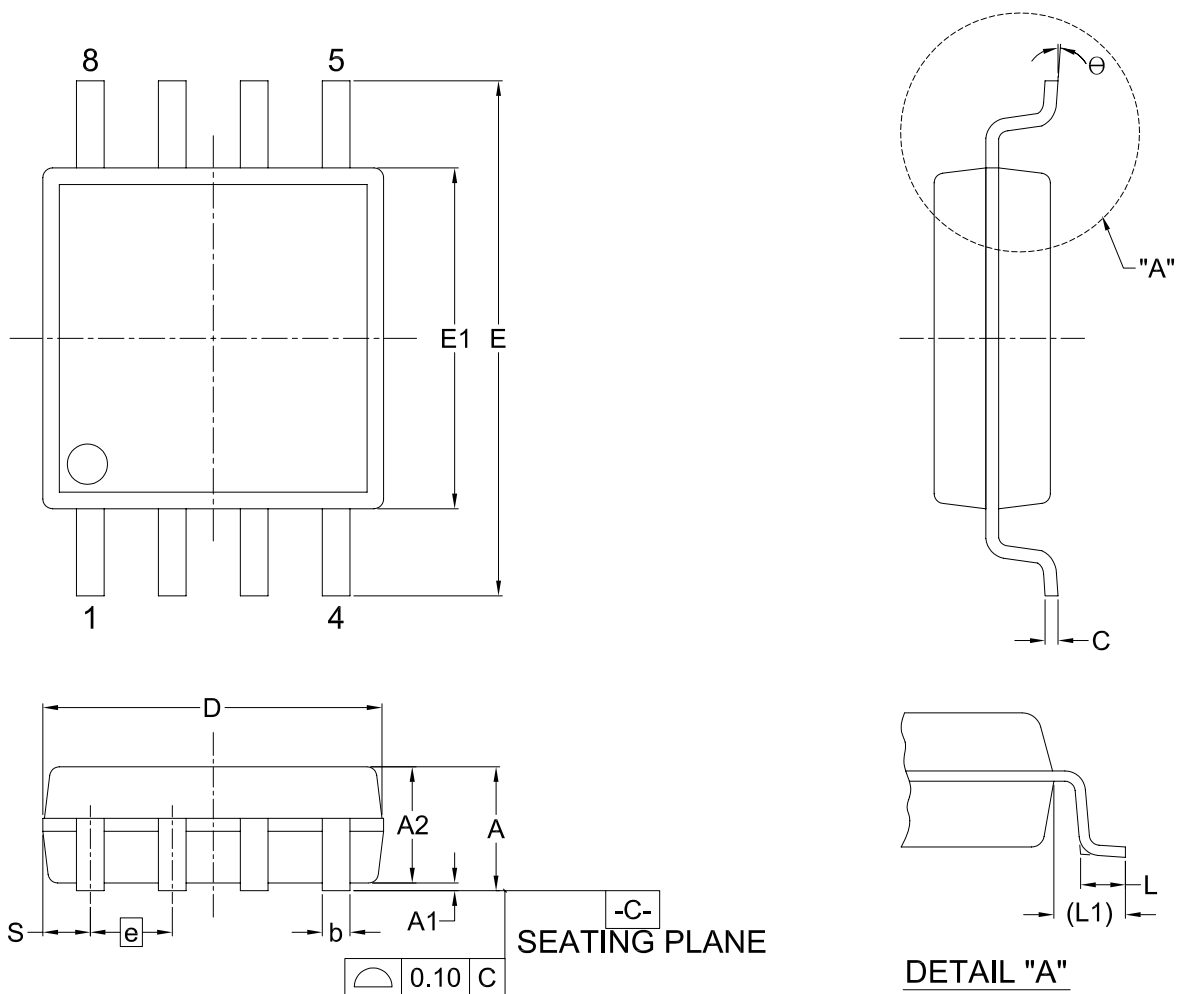


Dimensions (inch dimensions are derived from the original mm dimensions)

| SYMBOL<br>UNIT |      | A     | A1    | A2    | b     | C     | D     | E     | E1    | e     | L     | L1    | S     | $\theta$ |
|----------------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|----------|
| mm             | Min. | 1.75  | 0.05  | 1.70  | 0.36  | 0.19  | 5.13  | 7.70  | 5.18  | —     | 0.50  | 1.21  | 0.62  | 0°       |
|                | Nom. | 1.95  | 0.15  | 1.80  | 0.41  | 0.20  | 5.23  | 7.90  | 5.28  | 1.27  | 0.65  | 1.31  | 0.74  | 5°       |
|                | Max. | 2.16  | 0.20  | 1.91  | 0.51  | 0.25  | 5.33  | 8.10  | 5.38  | —     | 0.80  | 1.41  | 0.88  | 8°       |
| Inch           | Min. | 0.069 | 0.002 | 0.067 | 0.014 | 0.007 | 0.202 | 0.303 | 0.204 | —     | 0.020 | 0.048 | 0.024 | 0°       |
|                | Nom. | 0.077 | 0.006 | 0.071 | 0.016 | 0.008 | 0.206 | 0.311 | 0.208 | 0.050 | 0.026 | 0.052 | 0.029 | 5°       |
|                | Max. | 0.085 | 0.008 | 0.075 | 0.020 | 0.010 | 0.210 | 0.319 | 0.212 | —     | 0.031 | 0.056 | 0.035 | 8°       |

**20-3. 8-land WSON (8x6mm)**

Doc. Title: Package Outline for WSON 8L (8x6x0.8MM, LEAD PITCH 1.27MM)

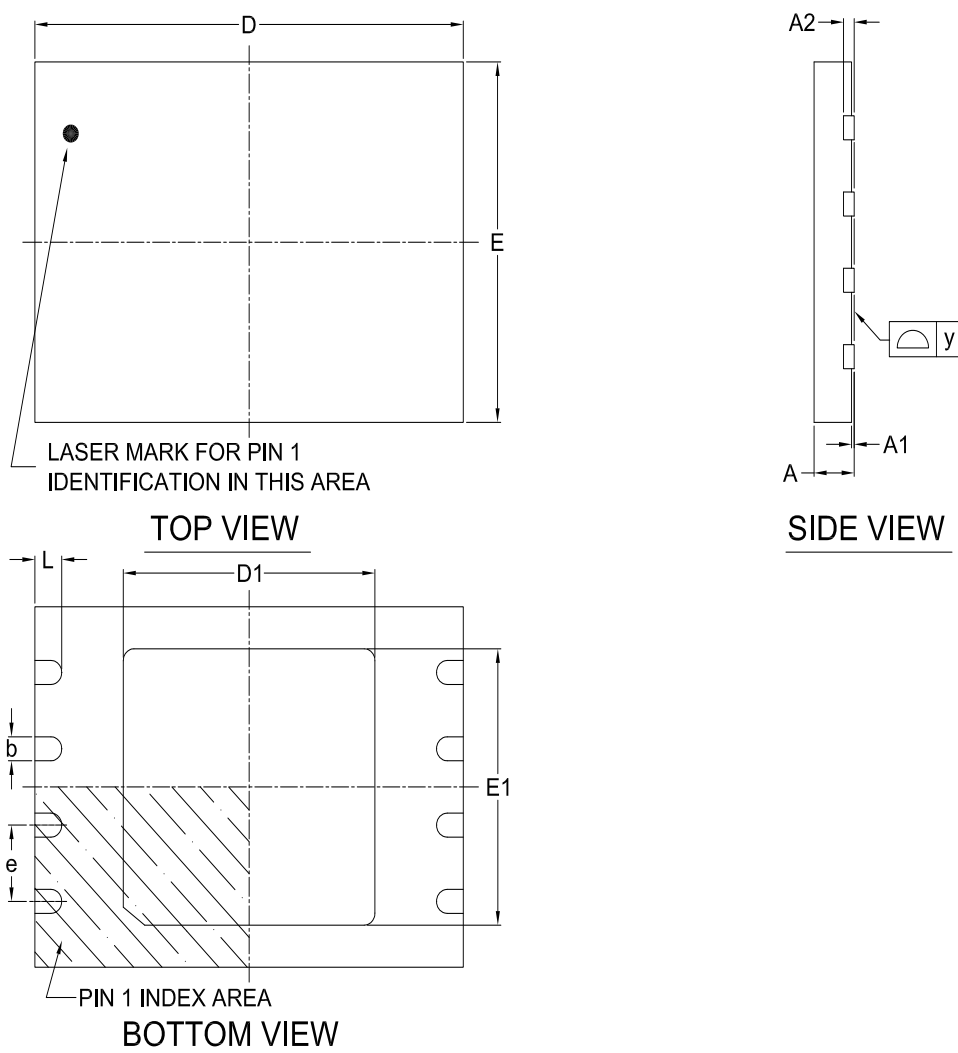

Note:


This package has an exposed metal pad underneath the package. It is recommended to leave the metal pad floating or to connect it to the same ground as the GND pin of the package. Do not connect the metal pad to any other voltage or signal line on the PCB. Avoid placing vias or traces underneath the metal pad. Connection of this metal pad to any other voltage or signal line can result in shorts and/or electrical malfunction of the device.

Dimensions (inch dimensions are derived from the original mm dimensions)

| SYMBOL |      | A     | A1    | A2    | b     | D     | D1    | E     | E1    | L     | e    | y     |
|--------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|-------|
| UNIT   |      |       |       |       |       |       |       |       |       |       |      |       |
| mm     | Min. | 0.70  | —     | —     | 0.35  | 7.90  | 4.65  | 5.90  | 4.55  | 0.45  | —    | 0.00  |
|        | Nom. | —     | —     | 0.20  | 0.40  | 8.00  | 4.70  | 6.00  | 4.60  | 0.50  | 1.27 | —     |
|        | Max. | 0.80  | 0.05  | —     | 0.48  | 8.10  | 4.75  | 6.10  | 4.65  | 0.55  | —    | 0.05  |
| Inch   | Min. | 0.028 | —     | —     | 0.014 | 0.311 | 0.183 | 0.232 | 0.179 | 0.018 | —    | 0.00  |
|        | Nom. | —     | —     | 0.008 | 0.016 | 0.315 | 0.185 | 0.236 | 0.181 | 0.020 | 0.05 | —     |
|        | Max. | 0.032 | 0.002 | —     | 0.019 | 0.319 | 0.187 | 0.240 | 0.183 | 0.022 | —    | 0.002 |

**20-4. 8-land WSON (6x5mm)**

Doc. Title: Package Outline for WSON 8L (6x5x0.8MM, LEAD PITCH 1.27MM)

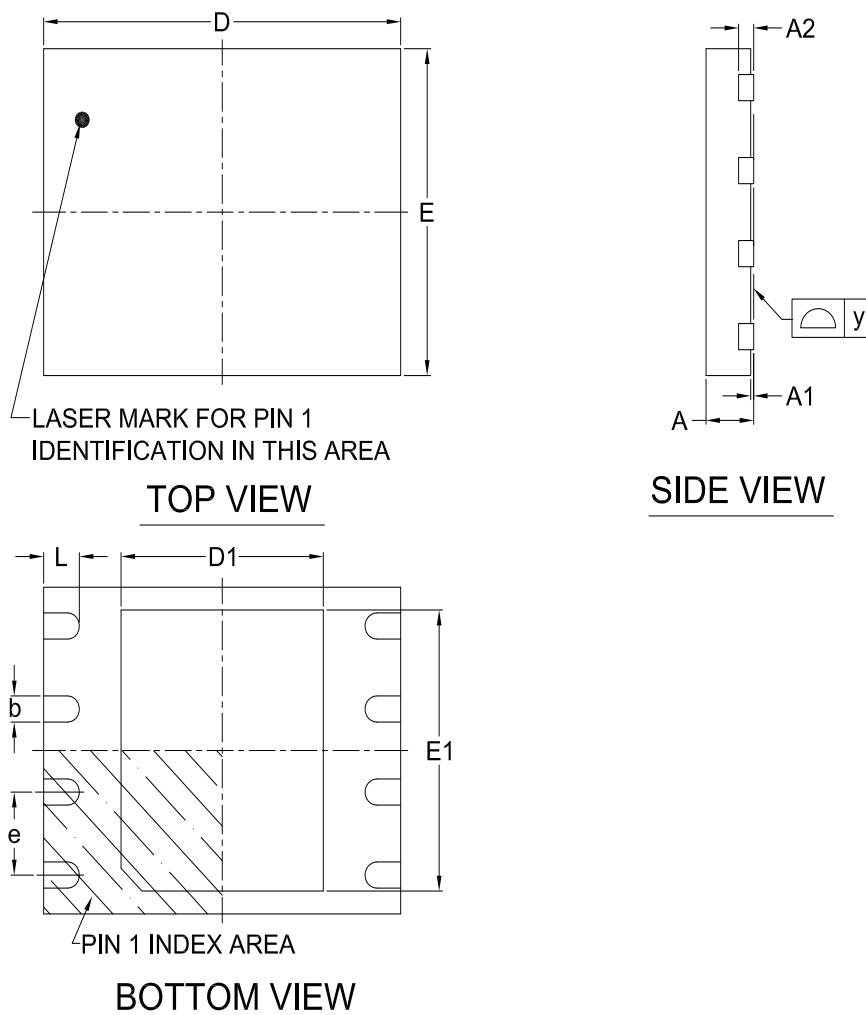

Note:

This package has an exposed metal pad underneath the package. It is recommended to leave the metal pad floating or to connect it to the same ground as the GND pin of the package. Do not connect the metal pad to any other voltage or signal line on the PCB. Avoid placing vias or traces underneath the metal pad. Connection of this metal pad to any other voltage or signal line can result in shorts and/or electrical malfunction of the device.


Dimensions (inch dimensions are derived from the original mm dimensions)

| SYMBOL |      | A     | A1    | A2    | b     | D     | D1    | E     | E1    | L     | e    | y     |
|--------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|-------|
| UNIT   |      |       |       |       |       |       |       |       |       |       |      |       |
| mm     | Min. | 0.70  | ---   | ---   | 0.35  | 5.90  | 3.35  | 4.90  | 3.95  | 0.55  | ---  | 0.00  |
|        | Nom. | ---   | ---   | 0.20  | 0.40  | 6.00  | 3.40  | 5.00  | 4.00  | 0.60  | 1.27 | ---   |
|        | Max. | 0.80  | 0.05  | ---   | 0.48  | 6.10  | 3.45  | 5.10  | 4.05  | 0.65  | ---  | 0.05  |
| Inch   | Min. | 0.028 | ---   | ---   | 0.014 | 0.232 | 0.132 | 0.193 | 0.156 | 0.022 | ---  | 0.00  |
|        | Nom. | ---   | ---   | 0.008 | 0.016 | 0.236 | 0.134 | 0.197 | 0.157 | 0.024 | 0.05 | ---   |
|        | Max. | 0.032 | 0.002 | ---   | 0.019 | 0.240 | 0.136 | 0.201 | 0.159 | 0.026 | ---  | 0.002 |



**20-6. 24-Ball BGA (5x5 ball array)**

Doc. Title: Package Outline for CSP 24BALL (6x8x1.2MM, BALL PITCH 1.0MM, BALL DIAMETER 0.4MM, 5x5 BALL ARRAY)

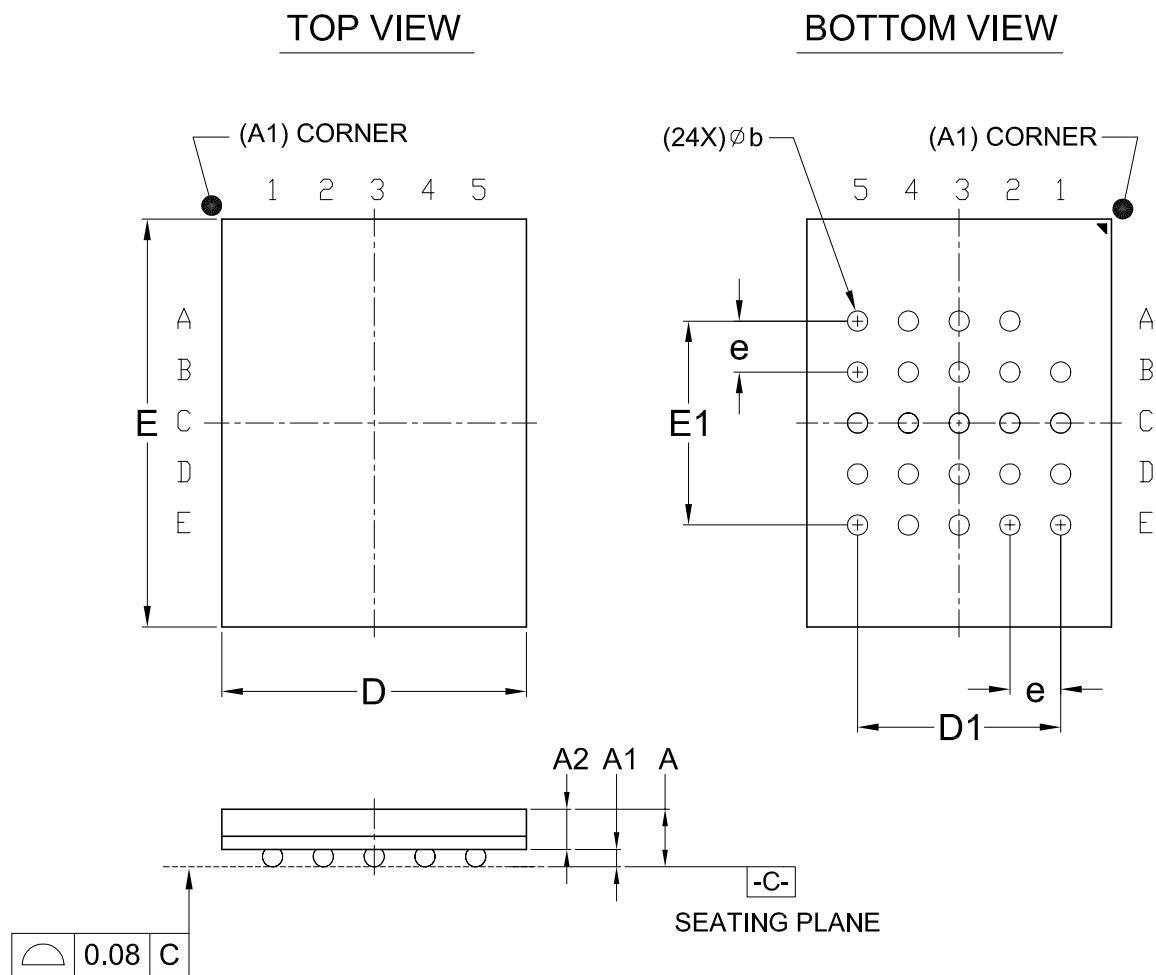

Dimensions (inch dimensions are derived from the original mm dimensions)

| SYMBOL |      | A     | A1    | A2    | b     | D     | D1    | E     | E1    | e     |
|--------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| UNIT   |      |       |       |       |       |       |       |       |       |       |
| mm     | Min. | ---   | 0.25  | 0.65  | 0.35  | 5.90  | ---   | 7.90  | ---   | ---   |
|        | Nom. | ---   | 0.30  | ---   | 0.40  | 6.00  | 4.00  | 8.00  | 4.00  | 1.00  |
|        | Max. | 1.20  | 0.35  | ---   | 0.45  | 6.10  | ---   | 8.10  | ---   | ---   |
| Inch   | Min. | ---   | 0.010 | 0.026 | 0.014 | 0.232 | ---   | 0.311 | ---   | ---   |
|        | Nom. | ---   | 0.012 | ---   | 0.016 | 0.236 | 0.157 | 0.315 | 0.157 | 0.039 |
|        | Max. | 0.047 | 0.014 | ---   | 0.018 | 0.240 | ---   | 0.319 | ---   | ---   |

## 21. REVISION HISTORY

| Revision No. | Description                                                                                              | Page                                           | Date        |
|--------------|----------------------------------------------------------------------------------------------------------|------------------------------------------------|-------------|
| 0.01         | 1. Added ODS information                                                                                 | P34,35                                         | OCT/24/2014 |
|              | 2. Corrected content error                                                                               | All                                            |             |
|              | 3. Added SPBLKDN bit and modified SPBs descriptions.                                                     | P73-74                                         |             |
|              | 4. Updated SFDP parameters and descriptions.                                                             | P82-83,90-91                                   |             |
|              | 5. Updated Input and Output Capacitance.                                                                 | P94                                            |             |
|              | 6. Updated DC/AC/VWI/tVSL parameters and notes.                                                          | P35,96-98,101-102                              |             |
|              | 7. Modified command table for 4READ, RDLR, WRLR.                                                         | P17,20,73                                      |             |
| 0.02         | 1. Updated SFDP parameters and descriptions.                                                             | P84-88,90                                      | NOV/27/2014 |
|              | 2. Content modification.                                                                                 | P4                                             |             |
| 1.0          | 1. Removed "Preliminary" to align the product status.                                                    | All                                            | FEB/19/2016 |
|              | 2. Added Preamble Bit Enable (PBE) bit.                                                                  | P34, 51-54                                     |             |
|              | 3. Updated DC/AC parameters, added tQVD parameter and updated Output Timing (DTR mode) figure.           | P102-104,108                                   |             |
|              | 4. Updated SFDP tables.                                                                                  | P14                                            |             |
|              | 5. Content correction.                                                                                   | P85-96                                         |             |
|              |                                                                                                          | P8,13,20,23,27, 33,46,61,69, 71-72,74,78-79,83 |             |
|              | 6. Added -08G products and 8WSON (6x5mm) package.                                                        | P5,7,109-110,114                               |             |
|              | 7. Added Factory Mode information                                                                        | P19,24-25,109,111                              |             |
| 1.1          | 1. Revised the descriptions of erase/program cycle in Factory Mode.                                      | P109                                           | AUG/10/2016 |
|              | 2. Updated tVR descriptions.                                                                             | P106,108                                       |             |
|              | 3. Added 24-TFBGA (4x6 ball array) package.                                                              | P5, 7, 111-112, 117                            |             |
|              | 4. Added MX25L25645GXDI-08G, MX25L25645GXDI-10G and MX25L25645GXCI-08G.                                  | P5,7,111-112                                   |             |
|              | 5. Content modification.                                                                                 | 118                                            |             |
|              |                                                                                                          | P41, 49, 52-55                                 |             |
|              |                                                                                                          | 59-61, 101, 108                                |             |
|              | 6. Modified "9-28. Page Program (PP)" descriptions.                                                      | P67                                            |             |
|              | 7. Updated Min. tVSL to 3000us.                                                                          | P108                                           |             |
| 1.2          | 1. Updated tCH/tCL/tCE/tPP values.                                                                       | P104, 109                                      | SEP/08/2016 |
| 1.3          | 1. Updated tCLQV descriptions and tCLQX values.                                                          | P104                                           | NOV/04/2016 |
|              | 2. Updated the note for the internal pull up status of RESET# and WP#/SIO2 pins.                         | P7                                             |             |
|              | 4. Content correction.                                                                                   | P11,34,41,72                                   |             |
| 1.4          | 1. Revised "Table 9. Output Driver Strength Table".                                                      | P36                                            | FEB/08/2017 |
|              | 2. Added Key Features on the cover page.                                                                 | P1                                             |             |
|              | 3. Added "Figure 96. SCLK TIMING DEFINITION".                                                            | P102                                           |             |
| 1.5          | 1. Removed the QPI support for WPSEL/GBLK/GBULK commands as a typo correction.                           | P19,20,80                                      | MAY/09/2017 |
| 1.6          | 1. Corrected Release from Deep Power-down (RDP) descriptions.                                            | P26                                            | NOV/07/2017 |
|              | 2. Added WRSCUR and RDSCUR command figures.                                                              | P71-72                                         |             |
|              | 3. Modified Note descriptions of AC Tables.                                                              | P105-106                                       |             |
|              | 4. Modified "19. PART NAME DESCRIPTION".                                                                 | P113                                           |             |
|              | 5. Updated "20-3. 8-land WSON (8x6mm)" and "20-4. 8-land WSON (6x5mm)" in Min./Max. D1, E1 and L values. | P116-117                                       |             |
|              | 6. Content modification.                                                                                 | P5, 16, 36                                     |             |
|              | 7. Format modification.                                                                                  | P114-119                                       |             |

| Revision No. | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Page                                                                                                                                                                                           | Date        |
|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| 1.7          | <ul style="list-style-type: none"> <li>1. Added "Macronix Proprietary" footnote.</li> <li>2. 4READ Action description modification.</li> <li>3. Modified the operation descriptions of how to exit Performance Enhance Mode.</li> <li>4. Figure 93 title modification.</li> <li>5. Modified the fTCLK descriptions.</li> <li>6. Revised the note descriptions of ERASE AND PROGRAMMING PERFORMANCE.</li> </ul>                                                                                                                                                                                    | <ul style="list-style-type: none"> <li>All</li> <li>P17</li> <li>P59</li> <li>P103</li> <li>P105</li> <li>P110</li> </ul>                                                                      | OCT/04/2018 |
| 1.8          | <ul style="list-style-type: none"> <li>1. Modified Serial Input Timing (STR mode/DTR mode).</li> <li>2. Added tDVCL and tCLDX values.</li> <li>3. Description modification.</li> <li>4. Modified 24-Ball BGA TOP View</li> <li>5. Revised Max. Chip erase time.</li> <li>6. Revised the descriptions of Performance Enhance Mode and wrap around feature.</li> <li>7. Added RESET# in <i>"Figure 97. AC Timing at Device Power-Up"</i>.</li> <li>8. Modified the note description of Max. Erase/Program</li> <li>9. Modified the descriptions of <i>"17. LATCH-UP CHARACTERISTICS"</i></li> </ul> | <ul style="list-style-type: none"> <li>P14</li> <li>P14, 106</li> <li>P1,5</li> <li>P7</li> <li>P106, 111</li> <li>P49, 60</li> <li>P108</li> <li>P111</li> <li>P112</li> </ul>                | DEC/20/2019 |
| 1.9          | <ul style="list-style-type: none"> <li>1. Updated the note for the internal pull up status of RESET#/SIO3 pin.</li> <li>2. Added "Support Performance Enhance Mode - XIP (execute-in-place)".</li> <li>3. Corrected "Read Electronic Signature (RES) Sequence" figures.</li> <li>4. Content modification.</li> <li>5. fTCLK description modification.</li> <li>6. Added tCHDX/tCLDX descriptions &amp; tCLQV/tCLQX descriptions for VCC=3.0V-3.6V.</li> <li>7. Revised Doc. Title of package outline.</li> </ul>                                                                                  | <ul style="list-style-type: none"> <li>P7</li> <li>P5, 60</li> <li>P27-28</li> <li>P5, 11, 13, 23, 27, 35, 38, 43-47, 59, 74, 112</li> <li>P106-107</li> <li>P106-107</li> <li>P116</li> </ul> | JUL/07/2020 |
| 2.0          | <ul style="list-style-type: none"> <li>1. fSCLK description modification.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | <ul style="list-style-type: none"> <li>P106-107</li> </ul>                                                                                                                                     | NOV/25/2022 |



MACRONIX  
INTERNATIONAL Co., LTD.

**MX25L25645G**

Except for customized products which has been expressly identified in the applicable agreement, Macronix's products are designed, developed, and/or manufactured for ordinary business, industrial, personal, and/or household applications only, and not for use in any applications which may, directly or indirectly, cause death, personal injury, or severe property damages. In the event Macronix products are used in contradicted to their target usage above, the buyer shall take any and all actions to ensure said Macronix's product qualified for its actual use in accordance with the applicable laws and regulations; and Macronix as well as it's suppliers and/or distributors shall be released from any and all liability arisen therefrom.

Copyright© Macronix International Co., Ltd. 2014-2022. All rights reserved, including the trademarks and tradename thereof, such as Macronix, MXIC, MXIC Logo, MX Logo, Integrated Solutions Provider, Nbit, Macronix NBit, HybridNVM, HybridFlash, HybridXFlash, XtraROM, KH Logo, BE-SONOS, KSMC, Kingtech, MXSMIO, RichBook, OctaBus, ArmorFlash, LybraFlash. The names and brands of third party referred thereto (if any) are for identification purposes only.

For the contact and order information, please visit Macronix's Web site at: <http://www.macronix.com>

MACRONIX INTERNATIONAL CO., LTD. reserves the right to change product and specifications without notice.