

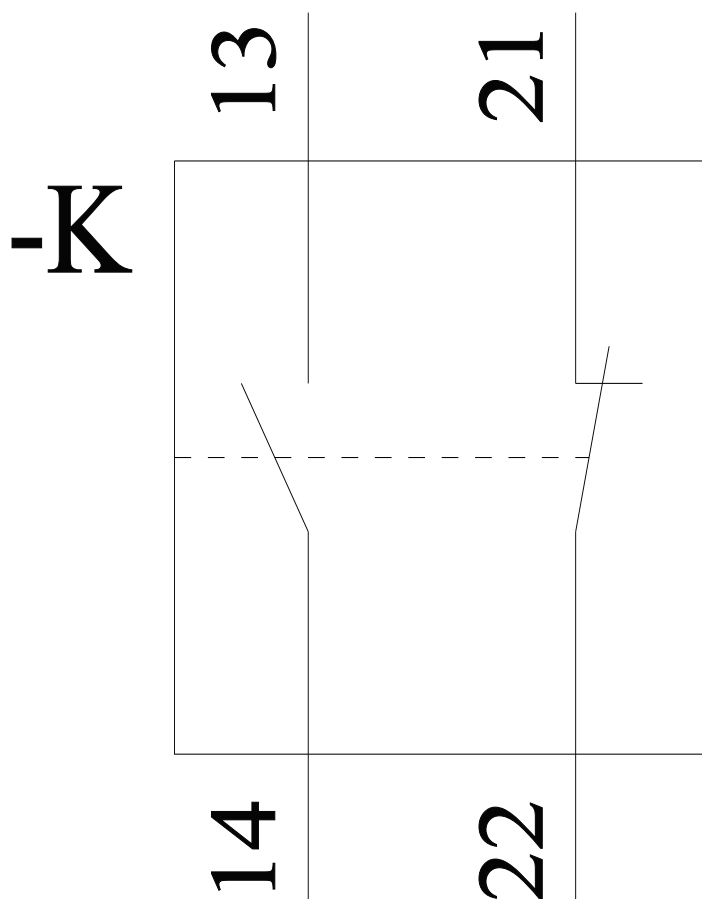


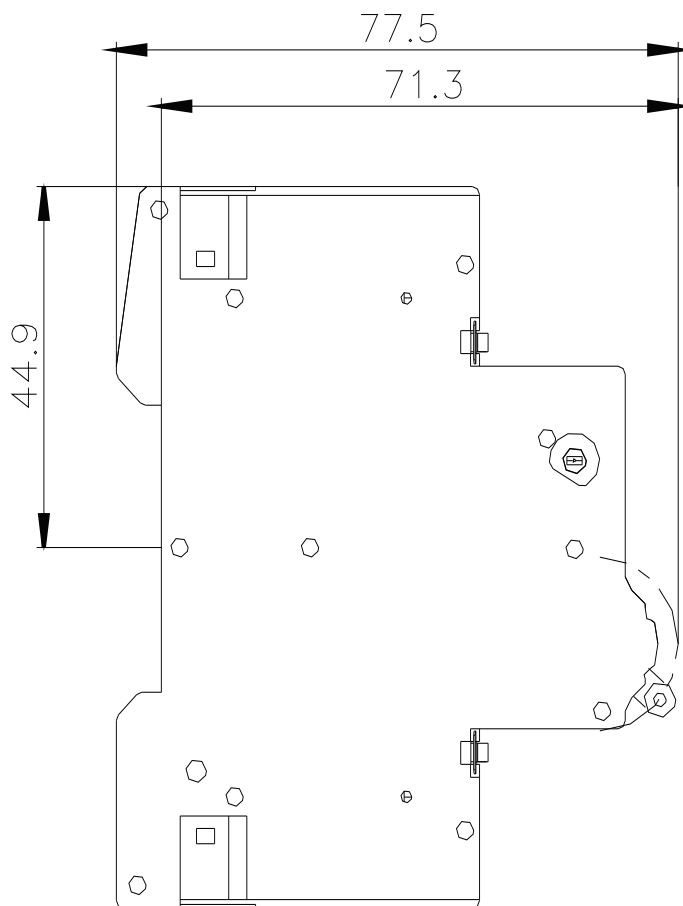


auxiliary switch, 1 NO + 1 NC for miniature circuit breakers 5SL, 5SY, 5SP, incorporated switch 5TL1, RCBO 5SU1 (without 5SU1...FP/FR), RCCB 5SV (for 5SU1, handle coupler 5ST3805-1 is required)

Model	
product brand name	SENTRON
product designation	auxiliary switches
design of the product	Mountable
design of the product factory mounted	No
electrical endurance (operating cycles) typical	10 000
Voltage	
insulation voltage rated value	440 V
surge voltage resistance rated value	4 kV
Current	
operational current at DC rated value	0.01 A
Supply voltage	
supply voltage at DC rated value	
• minimum	12 V
operating voltage	
• rated value	400 V
• at AC rated value minimum	12 V
• at DC rated value minimum	12 V
protection class IP	IP20
Control current	
type of voltage of control voltage	AC/DC
Product details	
product component	
• auxiliary switch	Yes
number of fault signal contacts	0
number of NC contacts	1
number of NO contacts	1
number of CO contacts	0
product extension can be mounted	Universal
product extension	auxiliary switch
product function test function for fault current trip	No
Connections	
connectable conductor cross-section	
• minimum	0.5 mm ²
• maximum	2.5 mm ²
AWG number as coded connectable conductor cross section	
• minimum	24
• maximum	12

tightening torque with screw-type terminals		
• maximum	0.5 N·m	
Mechanical Design		
height	90 mm	
width	9 mm	
depth	70 mm	
number of modular width units	1	
Net Weight	49.7 g	
Environmental conditions		
standard	IEC/EN60947-5-1; IEC/EN62019	
ambient temperature during operation		
• minimum • maximum	-25 °C 55 °C	
ambient temperature during storage minimum	-40 °C	
Approvals Certificates		
Environment		
General Product Approval		
Environmental Con- firmations Environmental Con- firmations    		
General Product Approval		
 Miscellaneous   Confirmation 		
Maritime application	other	Railway
  Confirmation  Miscellaneous Special Test Certificate		
Further information		
Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875		
Information for data generation and storage https://support.industry.siemens.com/cs/ww/en/view/109995012		
Information- and Downloadcenter (Catalogs, Brochures,...) https://www.siemens.com/lowvoltage/catalogs		
Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3010		
Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/5ST3010		
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3010		
CAX-Online-Generator https://www.siemens.com/cax		
Tender specifications https://www.siemens.com/specifications		
Characteristic curves <a href="https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>">https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>		

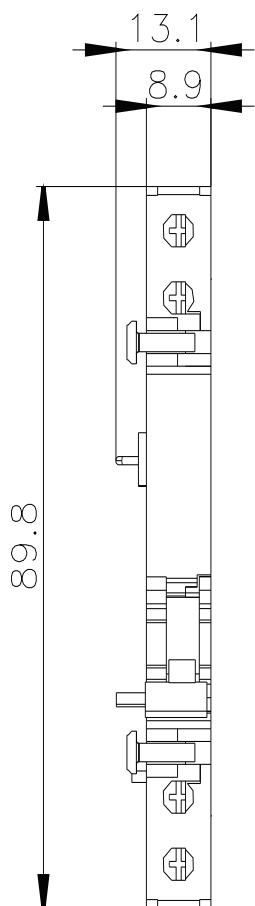

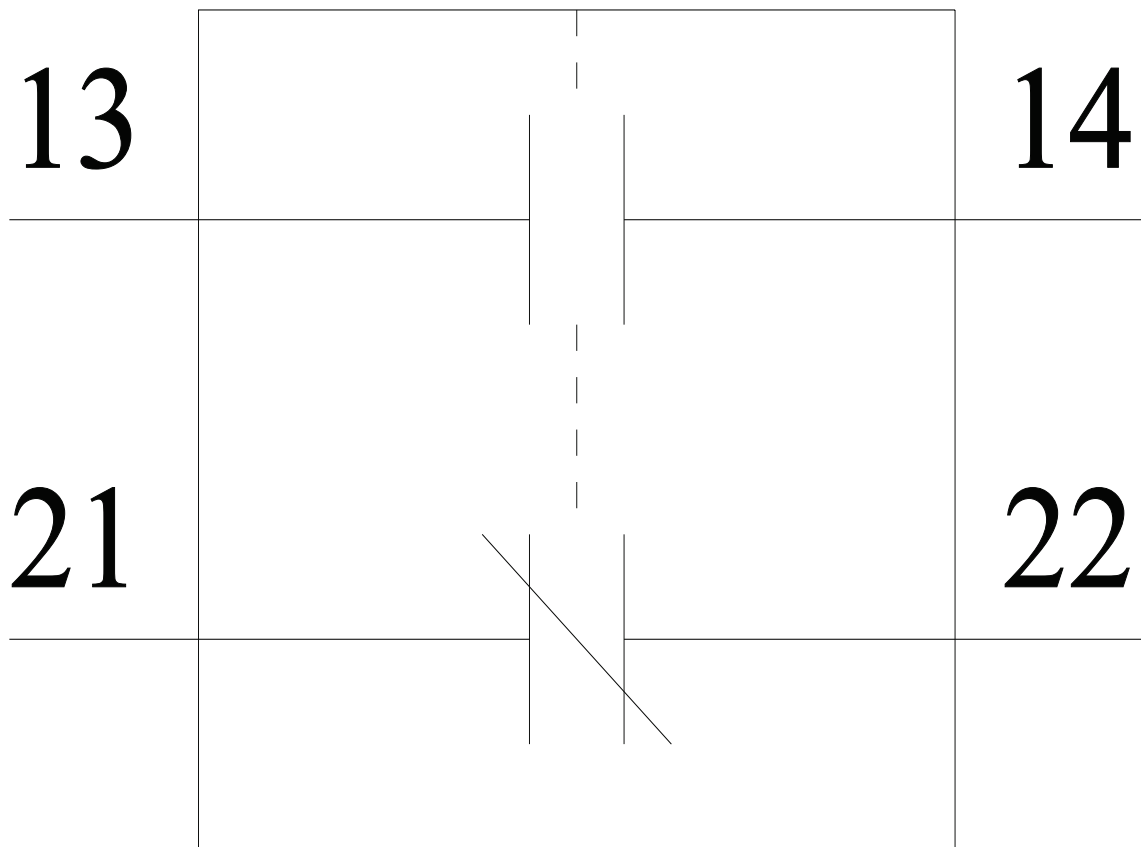

last modified:

5/5/2026 

