




Part Number : [675031020](#)

Product Description : Mini USB, B-Receptacle, Surface Mount, Right-Angle, Solder Tabs with Back Cover and PCB Locator Plastic Pegs, Lead-Free

Series Number : 67503

Status : Active

Product Category : I/O Connectors

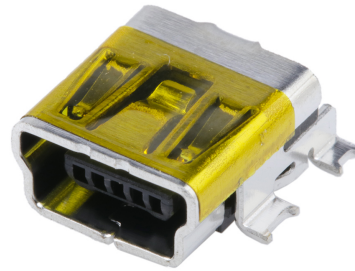

Documents & Resources

Drawings

[Drawing 675031020_sd.pdf](#)

[Packaging Design Drawing PK-67503-001-001.pdf](#)

3D Models and Design Files


[3D Model 675031020_stp.zip](#)

Specifications

[Product Specification PS-67803-001-001.pdf](#)

Product Environment Compliance

Compliance

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2023)8585-DC (23 Jan 2024)
EU RoHS	Compliant per EU 2015/863

Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D

- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

EU RoHS Certificate of Compliance

Part Details

General

Status	Active
Category	I/O Connectors
Series	67503
Description	Mini USB, B-Receptacle, Surface Mount, Right-Angle, Solder Tabs with Back Cover and PCB Locator Plastic Pegs, Lead-Free
Application	Wire-to-Board
Comments	With Back Cover
Component Type	Receptacle
Product Family	USB Connectors: USB Type-A, USB Type-B, and USB Type-C Plugs and Receptacles
Product Name	USB
Standard	USB 2.0
Type	Mini-B
UPC	822348780990

Electrical

Current - Maximum per Contact	1.0A
Shield Type	Full Shield
Shielded	Yes
Voltage - Maximum	30V AC (RMS)/DC

Physical

Circuits (Loaded)	5
Circuits (maximum)	5
Color - Resin	Black
Gender	Female
Lock to Mating Part	Yes

Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Mounting Style	Top-Mount
Net Weight	0.612/g
Number of Rows	1
Orientation	Right Angle
Packaging Type	Embossed Tape on Reel
Panel Mount	No
PCB Locator	Yes
PCB Retention	Yes
Pitch - Mating Interface	0.80mm
Pitch - Termination Interface	0.80mm
Plating min - Mating	0.762µm
Plating min - Termination	1.016µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Ports	1
Temperature Range - Operating	0° to +50°C
Termination Interface Style	Surface Mount
Waterproof / Dustproof	No

Solder Process Data

Max-Duration	10
Lead-Free Process Capability	REFLOW
Max-Cycle	1
Max-Temp	250