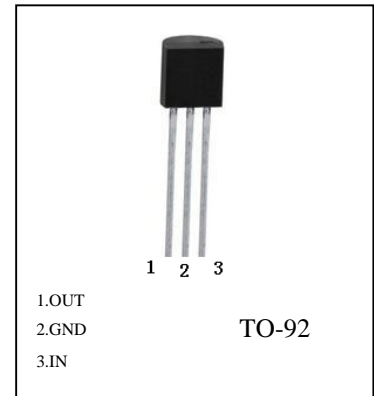


**FEATURES**

 Maximum Output current  $I_O$ : 0.1 A

 Output voltage  $V_O$ : 5 V

 Continuous total dissipation  $P_D$ : 0.625 W ( $T_a = 25^\circ\text{C}$ )

**78L05**

**ABSOLUTE MAXIMUM RATINGS** (Operating temperature range applies)

| Parameter                            | Symbol    | Value   | Unit             |
|--------------------------------------|-----------|---------|------------------|
| Input Voltage                        | $V_I$     | 30      | V                |
| Operating Junction Temperature Range | $T_{OPR}$ | 0-125   | $^\circ\text{C}$ |
| Storage Temperature Range            | $T_{STG}$ | -65-150 | $^\circ\text{C}$ |

**ELECTRICAL CHARACTERISTICS** ( $V_i=10\text{V}, I_o=500\text{mA}, C_i=0.33\mu\text{F}, C_o=0.1\mu\text{F}$ , unless otherwise specified)

| Parameter                | Symbol | Test conditions                   | Min  | Typ  | Max | Unit          |   |
|--------------------------|--------|-----------------------------------|--|------|-----|---------------|---|
| Output voltage           | $V_o$  | $25^\circ\text{C}$                | 4.8  | 5.0  | 5.2 | V             |   |
|                          |        | 0-125 $^\circ\text{C}$            | 7V $V_i$ 20V, $I_o=1\text{mA}\sim 40\text{mA}$ | 4.75 | 5.0 | 5.25          | V |
|                          |        |                                   | $I_o=1\text{mA}\sim 70\text{mA}$               | 4.75 | 5.0 | 5.25          | V |
| Load Regulation          | $V_o$  | $I_o=1\text{mA}\sim 100\text{mA}$ | $25^\circ\text{C}$                             | 15   | 60  | mV            |   |
|                          |        | $I_o=1\text{mA}\sim 40\text{mA}$  | $25^\circ\text{C}$                             | 8    | 30  | mV            |   |
| Line regulation          | $V_o$  | 7V $V_i$ 20V                      |  | 32   | 150 | mV            |   |
|                          |        | 8V $V_i$ 20V                      | $25^\circ\text{C}$                             | 26   | 100 | mV            |   |
| Quiescent Current        | $I_q$  |                                   | $25^\circ\text{C}$                             | 3.8  | 6   | mA            |   |
| Quiescent Current Change | $I_q$  | 8V $V_i$ 20V                      | 0-125 $^\circ\text{C}$                         |      | 1.5 | mA            |   |
|                          | $I_q$  | 1mA $V_i$ 40mA                    | 0-125 $^\circ\text{C}$                         |      | 0.1 | mA            |   |
| Output Noise Voltage     | $V_N$  | 10Hz f 100KHz                     | $25^\circ\text{C}$                             | 42   |     | $\mu\text{V}$ |   |
| Ripple Rejection         | RR     | 8V $V_i$ 20V, $f=120\text{Hz}$    | 0-125 $^\circ\text{C}$                         | 41   | 49  | dB            |   |
| Dropout Voltage          | $V_d$  |                                   | $25^\circ\text{C}$                             | 1.7  |     | V             |   |

**78L05 Typical Performance Characteristics**

