


**FEATURES**

- Maximum Output Current  $I_o$ : 0.1 A
- Output Voltage  $V_o$ : 3.3; 5; 6; 8; 9; 10; 12; 15; 18; 20; 24V
- Thermal Overload Protection
- Short Circuit Protection
- No External Components Are Required
- Continuous Total Dissipation  
 $P_D$ : 0.60 W ( $T_a = 25\text{ }^\circ\text{C}$ )



**TO-92**

**SCHEMATIC DIAGRAM**

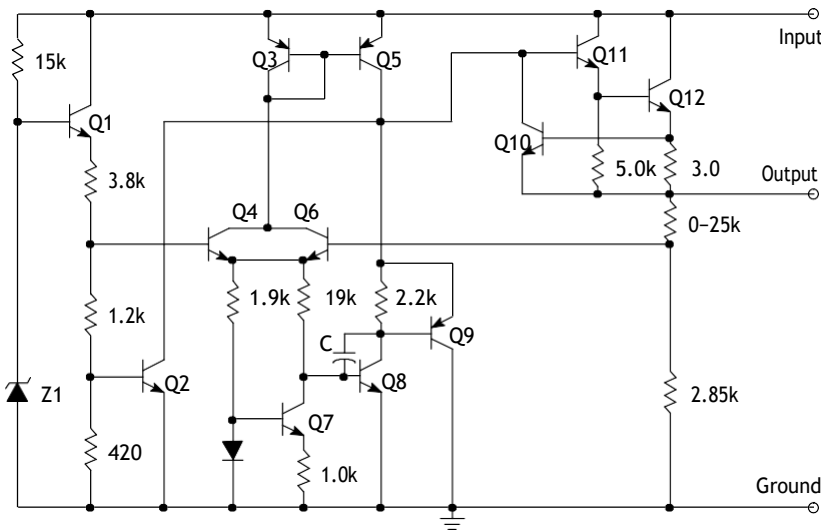


**MECHANICAL DATA**

- Case: TO -92
- Case Material: Molded Plastic. UL flammability
- Classification Rating: 94V-0
- Weight: 0.055 grams (approximate)

**MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)**

Parameter	Symbol	Value	Unit
Input Voltage	$V_i$	$V_o=3.3\text{V to }9\text{V}$	30 V
		$V_o=12\text{V to }15\text{V}$	35 V
		$V_o=18\text{V to }24\text{V}$	40 V
Power Dissipation	$P_D$	600	mW
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	160	$^\circ\text{C/W}$
Operating Temperature	$T_{opr}$	-40~+125	$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	-55 ~+150	$^\circ\text{C}$

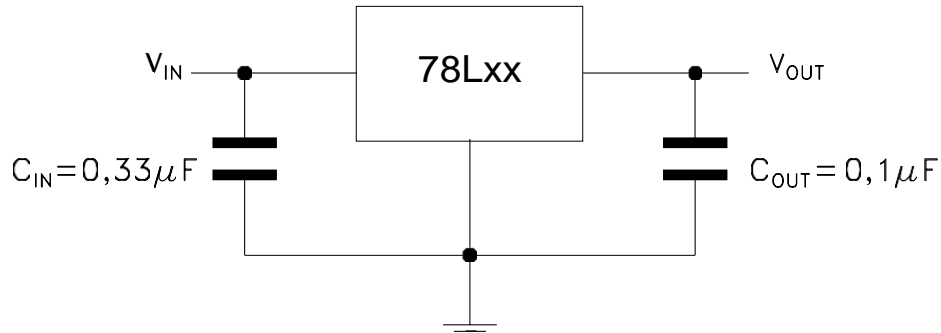**PLASTIC-ENCAPSULATE VOLTAGE REGULATORS**
**TEST CIRCUIT**


Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as Possible to the regulators.

**ELECTRICAL CHARACTERISTICS OF 78L05 AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE (Vi=10V, Io=40mA, Ci=0.33uF, Co=0.1uF, unless otherwise specified )**

Parameter	Symbol	Min	Typ	Max	Unit	Conditions
Output voltage	V <sub>O</sub>	4.80	5.0	5.20	V	T <sub>J</sub> =+25°C
		4.75	5.0	5.25	V	7V ≤ V <sub>i</sub> ≤ 20V, I <sub>o</sub> =1mA~40mA, 0°C ≤ T <sub>J</sub> ≤ +125°C
		4.75	5.0	5.25	V	7V ≤ V <sub>i</sub> ≤ 20V, I <sub>o</sub> =1mA~70mA, 0°C ≤ T <sub>J</sub> ≤ +125°C
Load Regulation	ΔV <sub>O</sub>		15	60	mV	I <sub>o</sub> =1mA~100mA, T <sub>J</sub> =+25°C
			8	30	mV	I <sub>o</sub> =1mA~40mA, T <sub>J</sub> =+25°C
Line regulation	ΔV <sub>O</sub>		32	150	mV	7V ≤ V <sub>i</sub> ≤ 20V
			26	100	mV	8V ≤ V <sub>i</sub> ≤ 20V, T <sub>J</sub> =+25°C
Quiescent Current	I <sub>q</sub>		3.8	6	mA	T <sub>J</sub> =+25°C
Quiescent Current Change	ΔI <sub>q</sub>			1.5	mA	8V ≤ V <sub>i</sub> ≤ 20V, -25°C ≤ T <sub>J</sub> ≤ +125°C
				0.1	mA	1mA ≤ I <sub>i</sub> ≤ 40mA, -25°C ≤ T <sub>J</sub> ≤ +125°C
Output Noise Voltage	V <sub>N</sub>		42		μV/V <sub>O</sub>	10Hz ≤ f ≤ 100kHz, T <sub>J</sub> =+25°C
Ripple Rejection	RR	41	49		dB	8V ≤ V <sub>i</sub> ≤ 20V, f=120Hz, -25°C ≤ T <sub>J</sub> ≤ +125°C
Dropout Voltage	V <sub>d</sub>		1.7		V	T <sub>J</sub> =+25°C

\*Pulse Test

**PLASTIC-ENCAPSULATE VOLTAGE REGULATORS**
**ELECTRICAL CHARACTERISTICS OF 78L06 AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE  
( $V_i=10V, I_o=40mA, C_i=0.33\mu F, C_o=0.1\mu F$ , unless otherwise specified )**

Parameter	Symbol	Min	Typ	Max	Unit	Conditions
Output voltage	$V_o$	5.75	6.0	6.25	V	$T_J=+25^\circ C$
		5.7	6.0	6.3	V	$8V \leq V_i \leq 20V, I_o=1mA \sim 40mA, 0^\circ C \leq T_J \leq +125^\circ C$
		5.7	6.0	6.3	V	$8V \leq V_i \leq 20V, I_o=1mA \sim 70mA, 0^\circ C \leq T_J \leq +125^\circ C$
Load Regulation	$\Delta V_o$		16	80	mV	$I_o=1mA \sim 100mA, T_J=+25^\circ C$
			9	40	mV	$I_o=1mA \sim 40mA, T_J=+25^\circ C$
Line regulation	$\Delta V_o$		35	175	mV	$8V \leq V_i \leq 20V$
			29	125	mV	$9V \leq V_i \leq 20V, T_J=+25^\circ C$
Quiescent Current	$I_q$		3.9	6	mA	$T_J=+25^\circ C$
Quiescent Current Change	$\Delta I_q$			1.5	mA	$9V \leq V_i \leq 20V, 0^\circ C \leq T_J \leq +125^\circ C$
				0.1	mA	$1mA \leq I_o \leq 40mA, 0^\circ C \leq T_J \leq +125^\circ C$
Output Noise Voltage	$V_N$		46		$\mu V/V_o$	$10Hz \leq f \leq 100kHz, T_J=+25^\circ C$
Ripple Rejection	RR	40	48		dB	$9V \leq V_i \leq 19V, f=120Hz, 0^\circ C \leq T_J \leq +125^\circ C$
Dropout Voltage	$V_d$		1.7		V	$T_J=+25^\circ C$

\*Pulse Test

**ELECTRICAL CHARACTERISTICS OF 78L08 AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE  
( $V_i=10V, I_o=40mA, C_i=0.33\mu F, C_o=0.1\mu F$ , unless otherwise specified )**

Parameter	Symbol	Min	Typ	Max	Unit	Conditions
Output voltage	$V_o$	7.7	8.0	8.3	V	$T_J=+25^\circ C$
		7.6	8.0	8.4	V	$10.5V \leq V_i \leq 23V, I_o=1mA \sim 40mA, 0^\circ C \leq T_J \leq +125^\circ C$
		7.6	8.0	8.4	V	$10.5V \leq V_i \leq 23V, I_o=1mA \sim 70mA, 0^\circ C \leq T_J \leq +125^\circ C$
Load Regulation	$\Delta V_o$		18	80	mV	$I_o=1mA \sim 100mA, T_J=+25^\circ C$
			10	40	mV	$I_o=1mA \sim 40mA, T_J=+25^\circ C$
Line regulation	$\Delta V_o$		42	175	mV	$10.5V \leq V_i \leq 23V$
			36	125	mV	$11V \leq V_i \leq 23V, T_J=+25^\circ C$
Quiescent Current	$I_q$		4	6	mA	$T_J=+25^\circ C$
Quiescent Current Change	$\Delta I_q$			1.5	mA	$11V \leq V_i \leq 23V, 0^\circ C \leq T_J \leq +125^\circ C$
				0.1	mA	$1mA \leq I_o \leq 40mA, 0^\circ C \leq T_J \leq +125^\circ C$
Output Noise Voltage	$V_N$		54		$\mu V/V_o$	$10Hz \leq f \leq 100kHz, T_J=+25^\circ C$
Ripple Rejection	RR	37	46		dB	$13V \leq V_i \leq 23V, f=120Hz, 0^\circ C \leq T_J \leq +125^\circ C$
Dropout Voltage	$V_d$		1.7		V	$T_J=+25^\circ C$

\*Pulse Test

**PLASTIC-ENCAPSULATE VOLTAGE REGULATORS**
**ELECTRICAL CHARACTERISTICS OF 78L09 AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE  
( $V_i=16V, I_o=40mA, C_i=0.33\mu F, C_o=0.1\mu F$ , unless otherwise specified )**

Parameter	Symbol	Min	Typ	Max	Unit	Conditions
Output voltage	$V_o$	8.64	9.0	9.36	V	$T_J=+25^\circ C$
		8.55	9.0	9.45	V	$12V \leq V_i \leq 24V, I_o=1mA \sim 40mA, 0^\circ C \leq T_J \leq +125^\circ C$
		8.55	9.0	9.45	V	$12V \leq V_i \leq 24V, I_o=1mA \sim 70mA, 0^\circ C \leq T_J \leq +125^\circ C$
Load Regulation	$\Delta V_o$		19	90	mV	$I_o=1mA \sim 100mA, T_J=+25^\circ C$
			11	40	mV	$I_o=1mA \sim 40mA, T_J=+25^\circ C$
Line regulation	$\Delta V_o$		45	175	mV	$12V \leq V_i \leq 24V$
			40	125	mV	$13V \leq V_i \leq 24V, T_J=+25^\circ C$
Quiescent Current	$I_q$		4.1	6.0	mA	$T_J=+25^\circ C$
Quiescent Current Change	$\Delta I_q$			1.5	mA	$13V \leq V_i \leq 24V, 0^\circ C \leq T_J \leq +125^\circ C$
				0.1	mA	$1mA \leq I_o \leq 40mA, 0^\circ C \leq T_J \leq +125^\circ C$
Output Noise Voltage	$V_N$	58			$\mu V/V_o$	$10Hz \leq f \leq 100kHz, T_J=+25^\circ C$
Ripple Rejection	RR		45		dB	$15V \leq V_i \leq 25V, f=120Hz, 0^\circ C \leq T_J \leq +125^\circ C$
Dropout Voltage	$V_d$		1.7		V	$T_J=+25^\circ C$

\*Pulse Test

**ELECTRICAL CHARACTERISTICS OF 78L10 AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE  
( $V_i=16V, I_o=40mA, C_i=0.33\mu F, C_o=0.1\mu F$ , unless otherwise specified )**

Parameter	Symbol	Min	Typ	Max	Unit	Conditions
Output voltage	$V_o$	9.2	10	10.8	V	$T_J=+25^\circ C$
		9	10	11	V	$12.5V \leq V_i \leq 23V, I_o=1mA \sim 40mA, 0^\circ C \leq T_J \leq +125^\circ C$
		9	10	11	V	$V_i=16V, I_o=1mA \sim 70mA, 0^\circ C \leq T_J \leq +125^\circ C$
Load Regulation	$\Delta V_o$		21	80	mV	$I_o=1mA \sim 100mA, T_J=+25^\circ C$
			12	40	mV	$I_o=1mA \sim 40mA, T_J=+25^\circ C$
Line regulation	$\Delta V_o$		50	230	mV	$12.5V \leq V_i \leq 23V, T_J=+25^\circ C$
			45	170	mV	$13V \leq V_i \leq 23V, T_J=+25^\circ C$
Quiescent Current	$I_q$		4.1	6.0	mA	$T_J=+25^\circ C$
Quiescent Current Change	$\Delta I_q$			1.5	mA	$13V \leq V_i \leq 23V, 0^\circ C \leq T_J \leq +125^\circ C$
				0.1	mA	$1mA \leq I_o \leq 40mA, 0^\circ C \leq T_J \leq +125^\circ C$
Output Noise Voltage	$V_N$		60		$\mu V/V_o$	$10Hz \leq f \leq 100kHz, T_J=+25^\circ C$
Ripple Rejection	RR	37	45		dB	$14V \leq V_i \leq 23V, f=120Hz, 0^\circ C \leq T_J \leq +125^\circ C$
Dropout Voltage	$V_d$		1.7		V	$T_J=+25^\circ C$

\*Pulse Test

**PLASTIC-ENCAPSULATE VOLTAGE REGULATORS**
**ELECTRICAL CHARACTERISTICS OF 78L12 AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE  
( $V_i=19V, I_o=40mA, C_i=0.33\mu F, C_o=0.1\mu F$ , unless otherwise specified )**

Parameter	Symbol	Min	Typ	Max	Unit	Conditions
Output voltage	$V_o$	11.5	12	12.5	V	$T_J=+25^\circ C$
		11.4	12	12.6	V	$14V \leq V_i \leq 27V, I_o=1mA \sim 40mA, 0^\circ C \leq T_J \leq +125^\circ C$
		11.4	12	12.6	V	$14V \leq V_i \leq 27V, I_o=1mA \sim 70mA, 0^\circ C \leq T_J \leq +125^\circ C$
Load Regulation	$\Delta V_o$		22	100	mV	$I_o=1mA \sim 100mA, T_J=+25^\circ C$
			13	50	mV	$I_o=1mA \sim 40mA, T_J=+25^\circ C$
Line regulation	$\Delta V_o$		55	250	mV	$14.5V \leq V_i \leq 27V$
			49	200	mV	$16V \leq V_i \leq 27V, T_J=+25^\circ C$
Quiescent Current	$I_q$		4.3	6.5	mA	$T_J=+25^\circ C$
Quiescent Current Change	$\Delta I_q$			1.5	mA	$16V \leq V_i \leq 27V, 0^\circ C \leq T_J \leq +125^\circ C$
				0.1	mA	$1mA \leq I_o \leq 40mA, 0^\circ C \leq T_J \leq +125^\circ C$
Output Noise Voltage	$V_N$		70		$\mu V/V_o$	$10Hz \leq f \leq 100kHz, T_J=+25^\circ C$
Ripple Rejection	RR	37	42		dB	$15V \leq V_i \leq 25V, f=120Hz, 0^\circ C \leq T_J \leq +125^\circ C$
Dropout Voltage	$V_d$		1.7		V	$T_J=+25^\circ C$

\*Pulse Test

**ELECTRICAL CHARACTERISTICS OF 78L15 AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE  
( $V_i=23V, I_o=40mA, C_i=0.33\mu F, C_o=0.1\mu F$ , unless otherwise specified )**

Parameter	Symbol	Min	Typ	Max	Unit	Conditions
Output voltage	$V_o$	14.4	15	15.6	V	$T_J=+25^\circ C$
		14.25	15	15.75	V	$17.5V \leq V_i \leq 30V, I_o=1mA \sim 40mA, 0^\circ C \leq T_J \leq +125^\circ C$
		14.25	15	15.75	V	$V_i=23V, I_o=1mA \sim 70mA, 0^\circ C \leq T_J \leq +125^\circ C$
Load Regulation	$\Delta V_o$		25	150	mV	$V_i=23V, I_o=1mA \sim 100mA, T_J=25^\circ C$
			15	75	mV	$V_i=23V, I_o=1mA \sim 40mA, T_J=25^\circ C$
Line regulation	$\Delta V_o$		65	300	mV	$17.5V \leq V_i \leq 30V, I_o=40mA, T_J=25^\circ C$
			58	250	mV	$19V \leq V_i \leq 30V, I_o=40mA, T_J=25^\circ C$
Quiescent Current	$I_q$		4.6	6.5	mA	$T_J=+25^\circ C$
Quiescent Current Change	$\Delta I_q$			1.5	mA	$19V \leq V_i \leq 30V, I_o=40mA, 0^\circ C \leq T_J \leq +125^\circ C$
				0.1	mA	$1mA \leq I_o \leq 40mA, V_i=23V, 0^\circ C \leq T_J \leq +125^\circ C$
Output Noise Voltage	$V_N$		82		$\mu V/V_o$	$10Hz \leq f \leq 100kHz, T_J=+25^\circ C$
Ripple Rejection	RR	34	39		dB	$18.5V \leq V_i \leq 28.5V, f=120Hz, 0^\circ C \leq T_J \leq +125^\circ C$
Dropout Voltage	$V_d$		1.7		V	$T_J=+25^\circ C$

\*Pulse Test

**PLASTIC-ENCAPSULATE VOLTAGE REGULATORS**
**ELECTRICAL CHARACTERISTICS OF 78L18 AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE  
( $V_i=26V, I_o=40mA, C_i=0.33\mu F, C_o=0.1\mu F$ , unless otherwise specified )**

Parameter	Symbol	Min	Typ	Max	Unit	Conditions
Output voltage	$V_o$	17.3	18	18.7	V	$T_J=+25^\circ C$
		17.1	18	18.9	V	$20.5V \leq V_i \leq 33V, I_o=1mA \sim 40mA, 0^\circ C \leq T_J \leq +125^\circ C$
		17.1	18	18.9	V	$V_i=26V, I_o=1mA \sim 70mA, 0^\circ C \leq T_J \leq +125^\circ C$
Load Regulation	$\Delta V_o$		27	180	mV	$V_i=26V, I_o=1mA \sim 100mA, T_J=25^\circ C$
			19	90	mV	$V_i=26V, I_o=1mA \sim 40mA, T_J=25^\circ C$
Line regulation	$\Delta V_o$		70	360	mV	$20.5V \leq V_i \leq 33V, I_o=40mA, T_J=25^\circ C$
			64	300	mV	$22V \leq V_i \leq 33V, I_o=40mA, T_J=25^\circ C$
Quiescent Current	$I_q$		4.7	6.5	mA	$T_J=+25^\circ C$
Quiescent Current Change	$\Delta I_q$			1.5	mA	$22V \leq V_i \leq 33V, I_o=40mA, 0^\circ C \leq T_J \leq +125^\circ C$
				0.1	mA	$1mA \leq I_o \leq 40mA, V_i=26V, 0^\circ C \leq T_J \leq +125^\circ C$
Output Noise Voltage	$V_N$		89		$\mu V/V_o$	$10Hz \leq f \leq 100kHz, T_J=+25^\circ C$
Ripple Rejection	RR	32	36		dB	$21.5V \leq V_i \leq 31.5V, f=120Hz, 0^\circ C \leq T_J \leq +125^\circ C$
Dropout Voltage	$V_d$		1.7		V	$T_J=+25^\circ C$

\*Pulse Test

**ELECTRICAL CHARACTERISTICS OF 78L20 AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE  
( $V_i=29V, I_o=40mA, C_i=0.33\mu F, C_o=0.1\mu F$ , unless otherwise specified )**

Parameter	Symbol	Min	Typ	Max	Unit	Conditions
Output voltage	$V_o$	18.4	20	21.6	V	$T_J=+25^\circ C$
		18	20	22	V	$24V \leq V_i \leq 33V, I_o=1mA \sim 40mA, 0^\circ C \leq T_J \leq +125^\circ C$
		18	20	22	V	$V_i=29V, I_o=1mA \sim 70mA, 0^\circ C \leq T_J \leq +125^\circ C$
Load Regulation	$\Delta V_o$		29	180	mV	$V_i=29V, I_o=1mA \sim 100mA, T_J=25^\circ C$
			17	90	mV	$V_i=29V, I_o=1mA \sim 40mA, T_J=25^\circ C$
Line regulation	$\Delta V_o$		75	330	mV	$22.5V \leq V_i \leq 34V, I_o=40mA, T_J=25^\circ C$
			70	280	mV	$24V \leq V_i \leq 34V, I_o=40mA, T_J=25^\circ C$
Quiescent Current	$I_q$		4.7	6.5	mA	$T_J=+25^\circ C$
Quiescent Current Change	$\Delta I_q$			1.5	mA	$25V \leq V_i \leq 33V, I_o=40mA, 0^\circ C \leq T_J \leq +125^\circ C$
				0.2	mA	$1mA \leq I_o \leq 40mA, V_i=26V, 0^\circ C \leq T_J \leq +125^\circ C$
Output Noise Voltage	$V_N$		120		$\mu V/V_o$	$10Hz \leq f \leq 100kHz, T_J=+25^\circ C$
Ripple Rejection	RR	31	38		dB	$25V \leq V_i \leq 35V, f=120Hz, 0^\circ C \leq T_J \leq +125^\circ C$
Dropout Voltage	$V_d$		1.7		V	$T_J=+25^\circ C$

\*Pulse Test

**PLASTIC-ENCAPSULATE VOLTAGE REGULATORS**
**ELECTRICAL CHARACTERISTICS OF 78L24 AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE  
( $V_i=33V, I_o=40mA, C_i=0.33\mu F, C_o=0.1\mu F$ , unless otherwise specified )**

Parameter	Symbol	Min	Typ	Max	Unit	Conditions
Output voltage	$V_o$	22.1	24	25.9	V	$T_J=+25^\circ C$
		21.6	24	26.4	V	$27V \leq V_i \leq 38V, I_o=1mA \sim 40mA, 0^\circ C \leq T_J \leq +125^\circ C$
		21.6	24	26.4	V	$V_i=33V, I_o=1mA \sim 70mA, 0^\circ C \leq T_J \leq +125^\circ C$
Load Regulation	$\Delta V_o$		29	200	mV	$V_i=33V, I_o=1mA \sim 100mA, T_J=25^\circ C$
			21	100	mV	$V_i=33V, I_o=1mA \sim 40mA, T_J=25^\circ C$
Line regulation	$\Delta V_o$		75	350	mV	$27V \leq V_i \leq 38V, I_o=40mA, T_J=25^\circ C$
			70	300	mV	$28V \leq V_i \leq 38V, I_o=40mA, T_J=25^\circ C$
Quiescent Current	$I_q$		4.7	6.5	mA	$T_J=+25^\circ C$
Quiescent Current Change	$\Delta I_q$			1.5	mA	$28V \leq V_i \leq 38V, I_o=40mA, 0^\circ C \leq T_J \leq +125^\circ C$
				0.2	mA	$1mA \leq I_o \leq 40mA, V_i=33V, 0^\circ C \leq T_J \leq +125^\circ C$
Output Noise Voltage	$V_N$		200		$\mu V/V_o$	$10Hz \leq f \leq 100kHz, T_J=+25^\circ C$
Ripple Rejection	RR	30	37		dB	$29V \leq V_i \leq 35V, f=120Hz, I_o=40mA, 0^\circ C \leq T_J \leq +125^\circ C$
Dropout Voltage	$V_d$		1.7		V	$T_J=+25^\circ C$

\*Pulse Test

**ELECTRICAL CHARACTERISTICS OF 78L33 AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE  
( $V_i=8.3V, I_o=40mA, C_i=0.33\mu F, C_o=0.1\mu F$ , unless otherwise specified )**

Parameter	Symbol	Min	Typ	Max	Unit	Conditions
Output voltage	$V_o$	3.168	3.3	3.432	V	$T_J=+25^\circ C$
		3.135	3.3	3.465	V	$5.3V \leq V_i \leq 20V, I_o=1mA \sim 40mA, -40^\circ C \leq T_J \leq +125^\circ C$
		3.135	3.3	3.465	V	$V_i=8.3V, I_o=1mA \sim 70mA, -40^\circ C \leq T_J \leq +125^\circ C$
Load Regulation	$\Delta V_o$			60	mV	$V_i=8.3V, I_o=1mA \sim 100mA, T_J=25^\circ C$
				30	mV	$V_i=8.3V, I_o=1mA \sim 40mA, T_J=25^\circ C$
Line regulation	$\Delta V_o$			150	mV	$5.3V \leq V_i \leq 20V, I_o=40mA, T_J=25^\circ C$
				100	mV	$6.3V \leq V_i \leq 20V, I_o=40mA, T_J=25^\circ C$
Quiescent Current	$I_q$			6	mA	$T_J=+25^\circ C$
Quiescent Current Change	$\Delta I_q$			1.5	mA	$6.3V \leq V_i \leq 20V, I_o=40mA, -40^\circ C \leq T_J \leq +125^\circ C$
				0.1	mA	$1mA \leq I_o \leq 40mA, V_i=8.3V, -40^\circ C \leq T_J \leq +125^\circ C$
Output Noise Voltage	$V_N$		40		$\mu V/V_o$	$10Hz \leq f \leq 100kHz, T_J=+25^\circ C$
Ripple Rejection	RR	41	49		dB	$6.3V \leq V_i \leq 16.3V, f=120Hz, I_o=40mA, -40^\circ C \leq T_J \leq +125^\circ C$
Dropout Voltage	$V_d$		1.7		V	$T_J=+25^\circ C$

\*Pulse Test

PLASTIC-ENCAPSULATE VOLTAGE REGULATORS

Typical Characteristics

Figure 1 : 78L05/12 Output Voltage vs Ambient Temperature

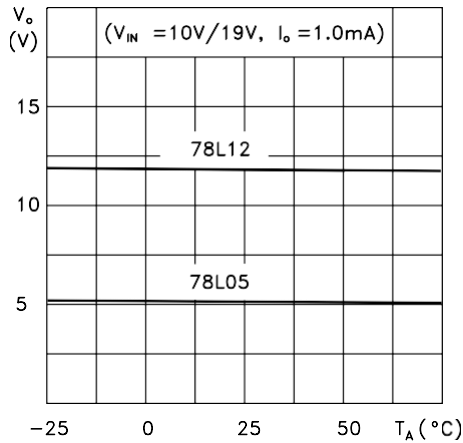


Figure 4 : 78L05/12 Quiescent Current vs Output Current

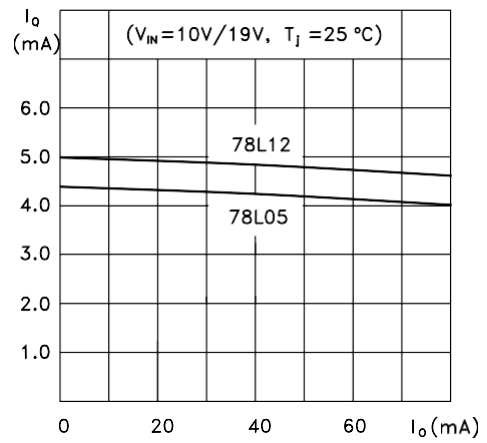


Figure 2 : 78L05/12/24 Load Characteristics

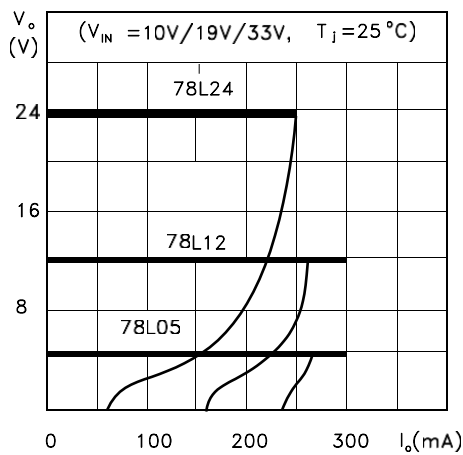


Figure 5 : 78L05 Quiescent Current vs Input Voltage

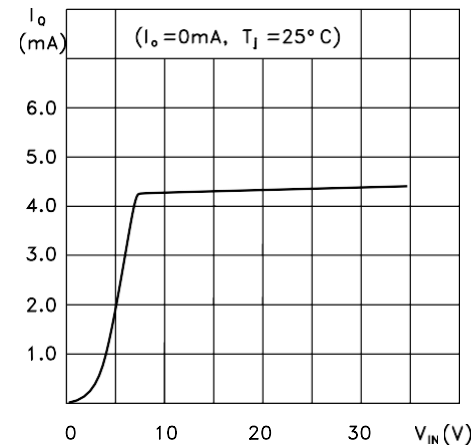


Figure 3 : 78L05/12/24 Thermal Shutdown


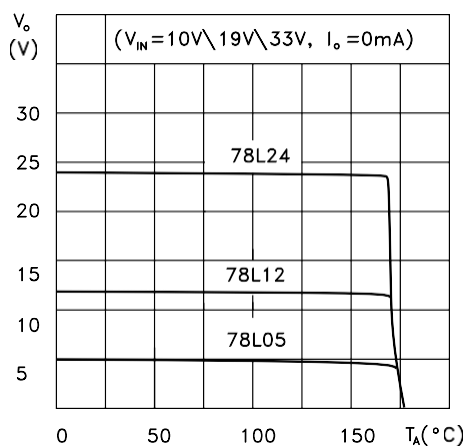



Figure 6 : 78L05/12/24 Output Characteristics



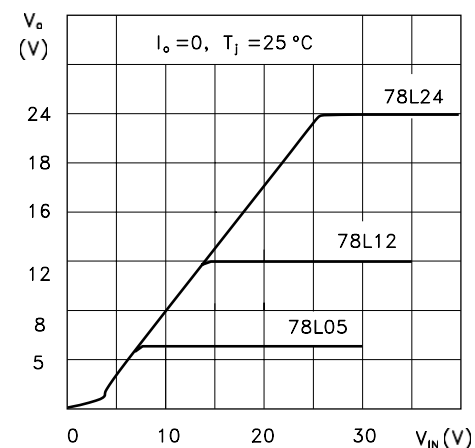


**PLASTIC-ENCAPSULATE VOLTAGE REGULATORS**


**Figure 7 : 78L05/12/24 Ripple Rejection**

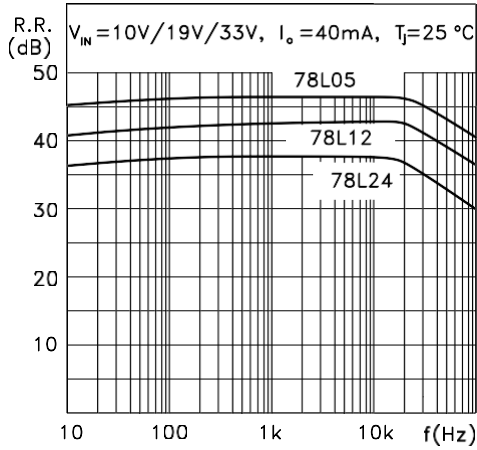

**Figure 9 : 78L00 Series Short Circuit Output Current**

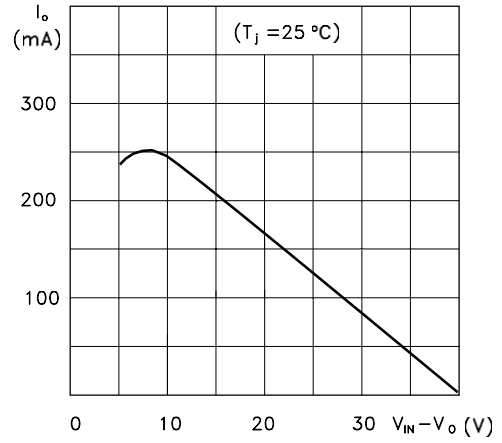


**Figure 8 : 78L05 Dropout Characteristics**

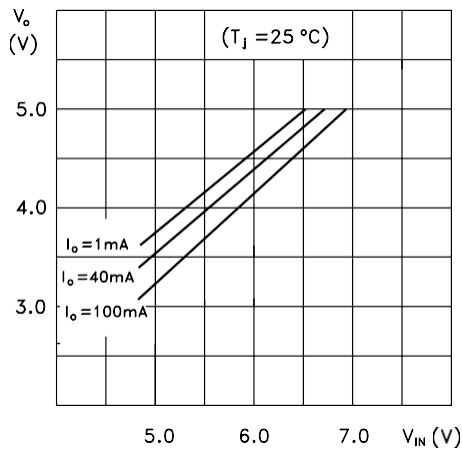


**PLASTIC-ENCAPSULATE VOLTAGE REGULATORS**

**TYPICAL APPLICATION**


**Table 10** : High Output Current Short Circuit Protected

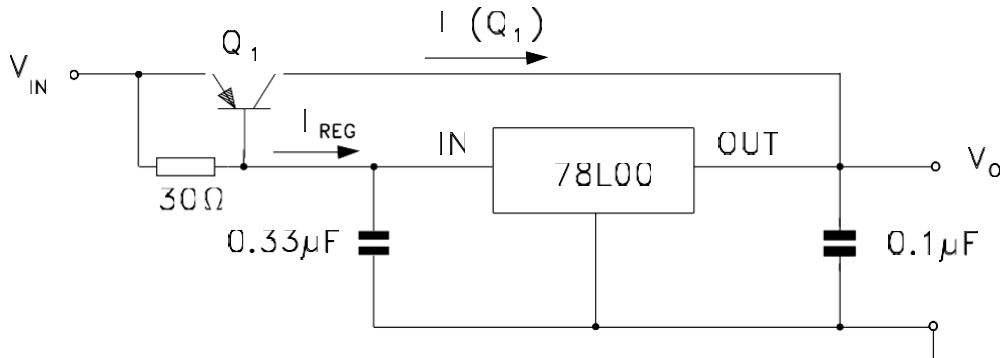


**Figure 11** : Edit Boost Circuit

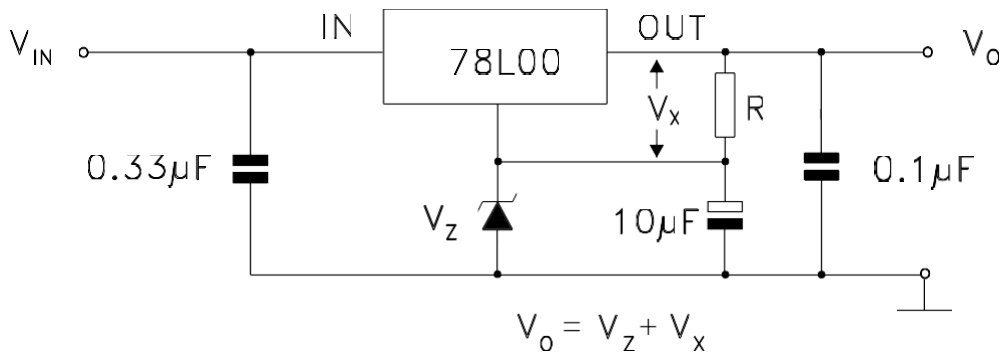

**Figure 12** : Current Regulator


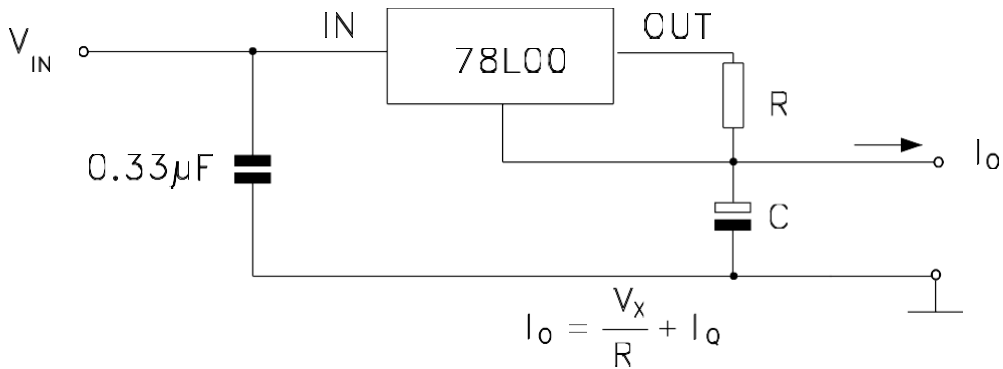


**Figure 13** : Adjustable Output Regulator

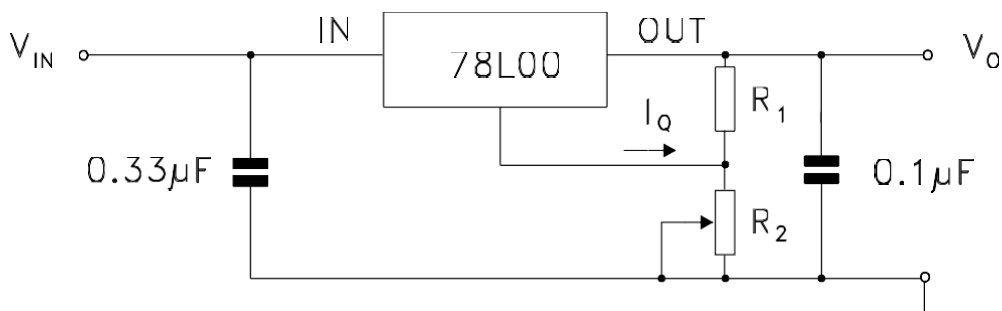


PLASTIC-ENCAPSULATE VOLTAGE REGULATORS

TO-92 Package Outline Dimensions

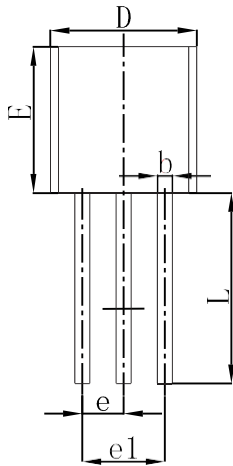

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Mi	Max	Mi	Max
A	3.300	3.700	0.130	0.146
A1	1.100	1.400	0.043	0.055
b	0.380	0.550	0.015	0.022
c	0.360	0.510	0.014	0.020
D	4.300	4.700	0.169	0.185
D1	3.430		0.135	
E	4.300	4.700	0.169	0.185
e	1.270 TYP		0.050 TYP	
e1	2.440	2.640	0.096	0.104
L	14.100	14.500	0.555	0.571
Φ		1.600		0.063
h	0.000	0.380	0.000	0.015

TO-92 Suggested Pad Layout

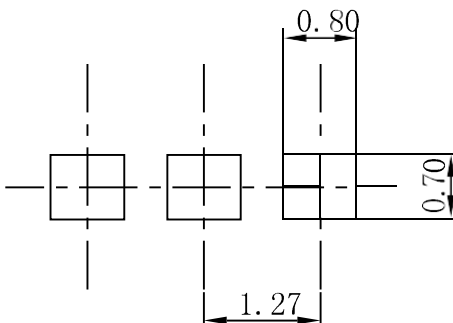


Note:

1. Controlling dimension: in millimeters
2. General tolerance: ±0.05mm
3. The pad layout is for reference purposes only


PLASTIC-ENCAPSULATE VOLTAGE REGULATORS

TO-92 Package Taping Dimensions

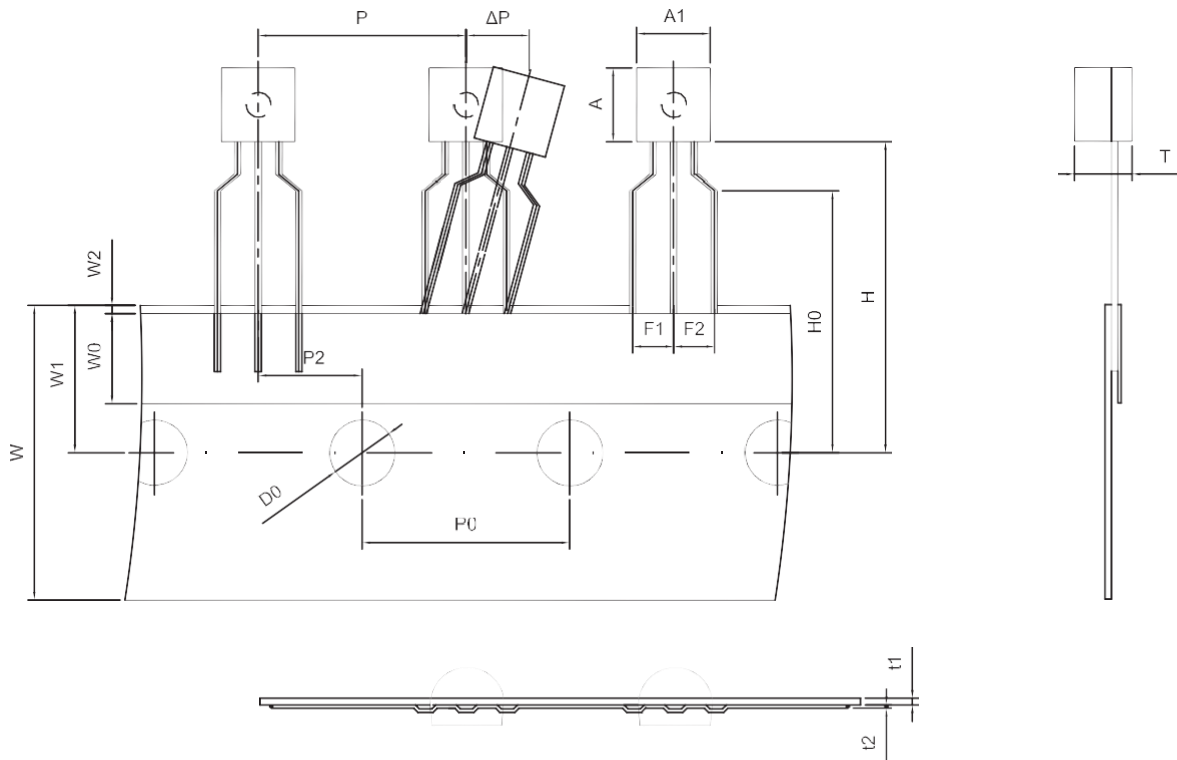

Dimensions are in millimeter

A1	A	T	P	P0	P2	F1	F2	W
4.5	4.5	3.5	12.7	12.7	6.35	2.5	2.5	18.0
W0	W1	W2	H	H0	D0	t1	t2	ΔP
6.0	9.0	1.0 MAX.	19.0	16.0	4.0	0.4	0.2	0

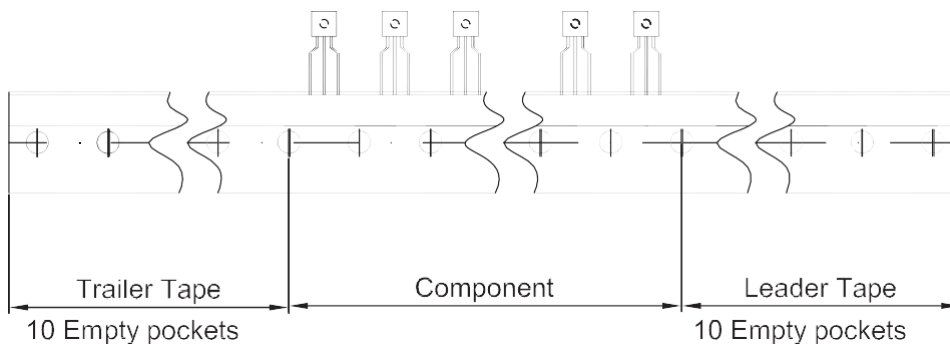

Package	Box	Box Size(mm)	Carton	Carton Size(mm)
TO-92	2000 pcs	333×162×43	20,000 pcs	350×340×250