


AD-A8TQ3

SMA Jack To Snap On TNC Plug **50Ω**
11GHz VSWR 1.2

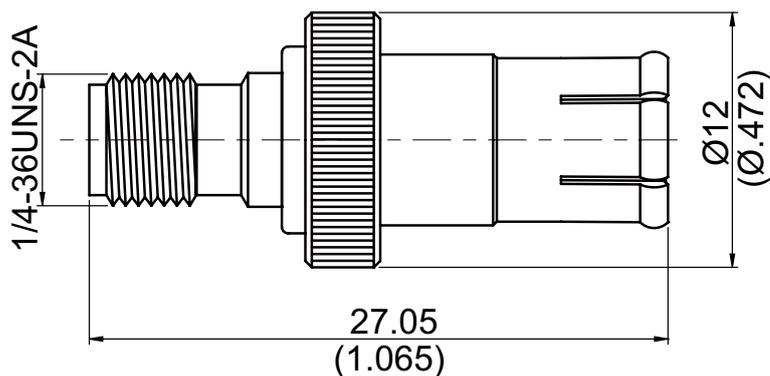

NOTE: Snap on TNC plug without locking mechanism.

Parts	Material	Plating (Micro-inch)
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	
Body	Brass (TNC)	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Body	Brass (SMA)	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20

Weight: 6.3 g

This part number complies with RoHS.


Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-A8TQ3	SMA Jack To Snap On TNC Plug 11GHz VSWR 1.2																
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Interface</div> <p>Standard</p> <p>Mechanically compatible with</p>	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; text-align: center;">SMA Jack Screw Side</td> <td style="width: 50%; text-align: center;">TNC Plug Snap On Side</td> </tr> <tr> <td style="text-align: center;">MIL-STD-348B</td> <td style="text-align: center;">Per JYEBAO Snap On TNC Plug</td> </tr> <tr> <td style="text-align: center;">2.92 & 3.5</td> <td></td> </tr> </table>	SMA Jack Screw Side	TNC Plug Snap On Side	MIL-STD-348B	Per JYEBAO Snap On TNC Plug	2.92 & 3.5											
SMA Jack Screw Side	TNC Plug Snap On Side																
MIL-STD-348B	Per JYEBAO Snap On TNC Plug																
2.92 & 3.5																	
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Electrical Data</div> <p>Impedance</p> <p>Frequency Range</p> <p>VSWR</p> <p>Insertion Loss</p> <p>Insulation Resistance</p> <p>Dielectric Withstanding Voltage (at sea level)</p> <p>Working Voltage (at sea level)</p>	<table style="width: 100%;"> <tr> <td style="width: 50%;">50Ω</td> <td style="width: 50%;"></td> </tr> <tr> <td>DC To 11GHz</td> <td></td> </tr> <tr> <td>≤ 1.2 (DC To 11GHz)</td> <td></td> </tr> <tr> <td>≤ 0.05 x √f(GHz) dB</td> <td></td> </tr> <tr> <td>≥ 5000MΩ</td> <td></td> </tr> <tr> <td>1500 V rms</td> <td></td> </tr> <tr> <td>500 V rms</td> <td></td> </tr> </table>		50Ω		DC To 11GHz		≤ 1.2 (DC To 11GHz)		≤ 0.05 x √f(GHz) dB		≥ 5000MΩ		1500 V rms		500 V rms		
50Ω																	
DC To 11GHz																	
≤ 1.2 (DC To 11GHz)																	
≤ 0.05 x √f(GHz) dB																	
≥ 5000MΩ																	
1500 V rms																	
500 V rms																	
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Mechanical Data</div> <p>Recommended Coupling Nut Torque</p> <p>Coupling Proof Torque</p> <p>Contact Captivation-axial</p> <p>Durability (mating)</p>	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;"></th> <th style="width: 25%; text-align: center;">SMA</th> <th style="width: 25%; text-align: center;">TNC</th> </tr> </thead> <tbody> <tr> <td>Recommended Coupling Nut Torque</td> <td style="text-align: center;">4 in-lbs</td> <td style="text-align: center;">NA (Snap On)</td> </tr> <tr> <td>Coupling Proof Torque</td> <td style="text-align: center;">5.3 in-lbs</td> <td style="text-align: center;">NA (Snap On)</td> </tr> <tr> <td>Contact Captivation-axial</td> <td style="text-align: center;">≥ 6.1 lbs</td> <td style="text-align: center;">≥ 6.1 lbs</td> </tr> <tr> <td>Durability (mating)</td> <td style="text-align: center;">≥ 100</td> <td style="text-align: center;">≥ 500</td> </tr> </tbody> </table>			SMA	TNC	Recommended Coupling Nut Torque	4 in-lbs	NA (Snap On)	Coupling Proof Torque	5.3 in-lbs	NA (Snap On)	Contact Captivation-axial	≥ 6.1 lbs	≥ 6.1 lbs	Durability (mating)	≥ 100	≥ 500
	SMA	TNC															
Recommended Coupling Nut Torque	4 in-lbs	NA (Snap On)															
Coupling Proof Torque	5.3 in-lbs	NA (Snap On)															
Contact Captivation-axial	≥ 6.1 lbs	≥ 6.1 lbs															
Durability (mating)	≥ 100	≥ 500															
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Environmental Data</div> <p>Temperature Range</p> <p>Thermal Shock</p> <p>Moisture Resistance</p> <p>Corrosion</p> <p>RoHS</p>	<p style="text-align: center;">-65°C to +165°C</p> <p>MIL-STD-202, Method 107, Condition B</p> <p>MIL-STD-202, Method 106</p> <p>MIL-STD-202, Method 101, Condition B</p> <p>Compliant</p>																

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-A8TQ3

SoftPlot Measurement Presentation
VSWR S11

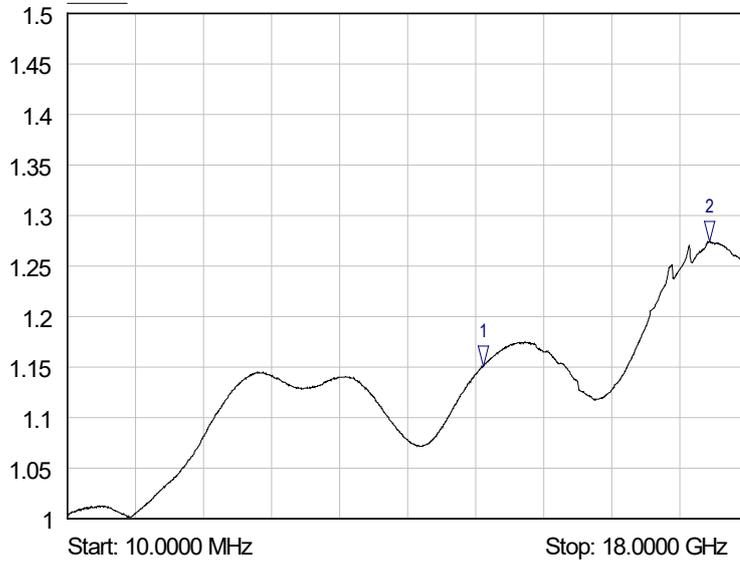

- 1 S11
▽ 11.0000 GHz
1.15 VSWR
- 2 S11
▽ 16.9800 GHz
1.27 VSWR