


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	DRAWING REPLACES SD121-09-0D1	6/24/14	D. DESJARDIN
B	ECN 8417: UPDATED OVERALL DESIGN AND DRAWING FORMAT	7/13/16	D. DESJARDIN
C	ECN 8792: CHG FINISH FROM CHROMATE TO NICKEL PLATED	5/30/17	R.CLARK

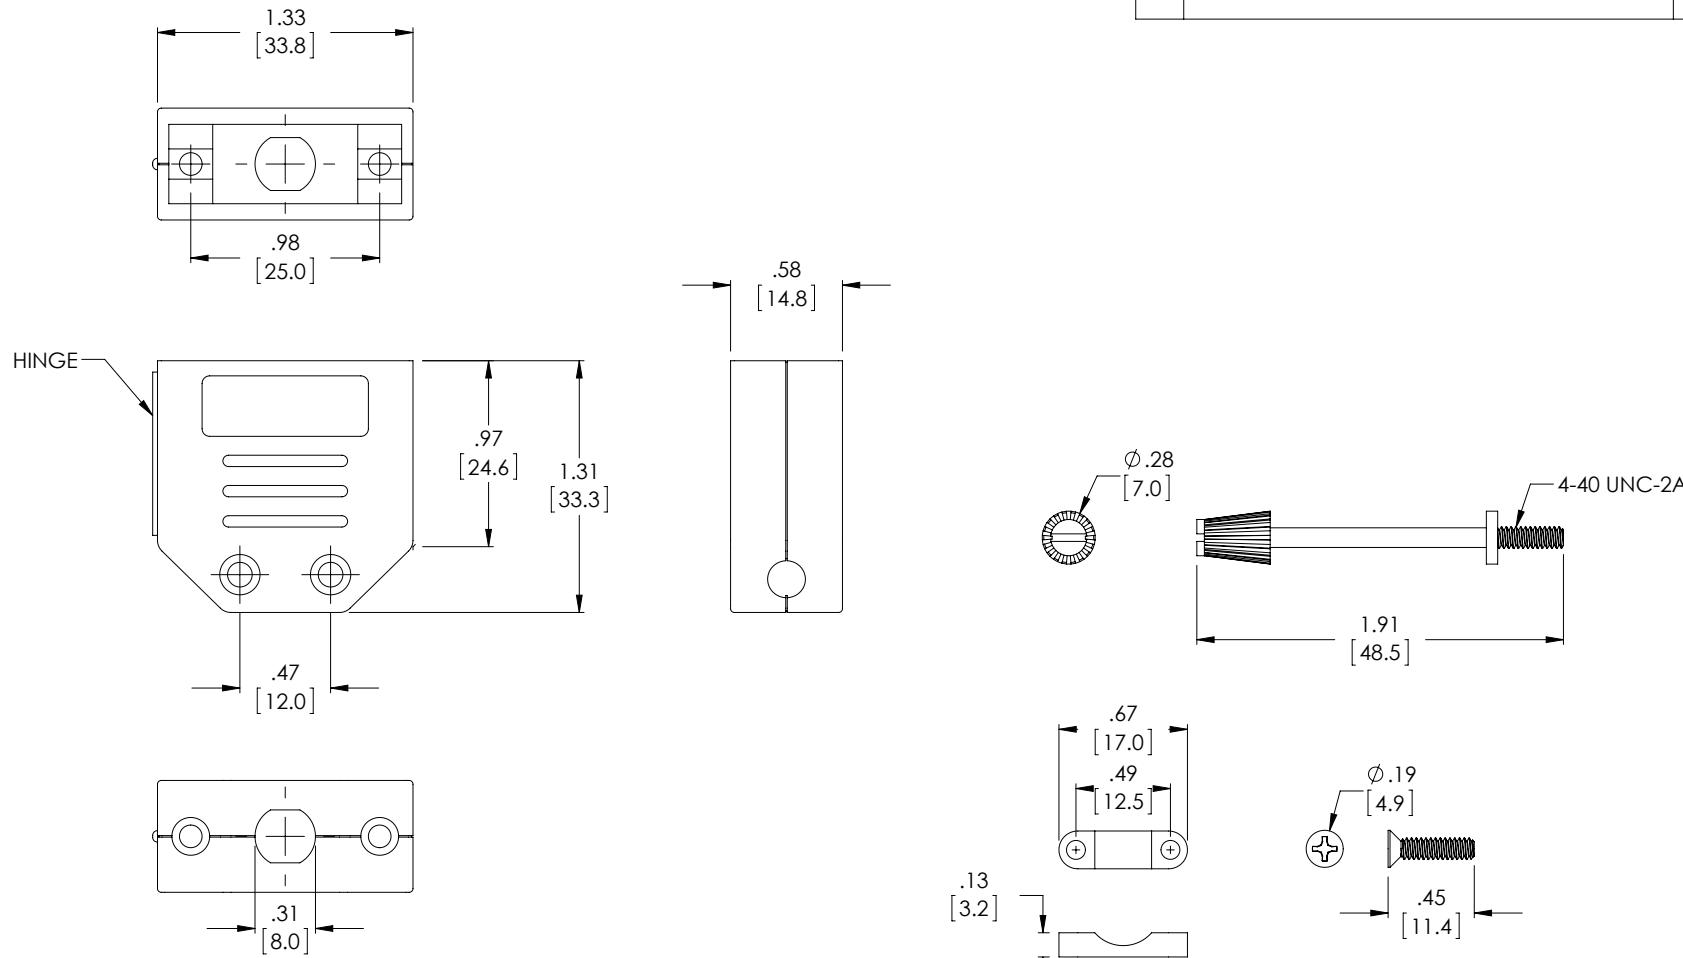

NOTES:

- HOOD: PP UL94HB
SCREW: STEEL
FINISH: NICKEL PLATED 
- HOOD IS UNSHIELDED.
- D-SUB CONNECTOR (DB9 OR HD15) IS SECURED IN PLACE WHEN HOOD IS SNAPPED SHUT.
- STRAIN RELIEF IS CONTAINED WITHIN HOOD.
- COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]	APPROVALS	DATE	50 HIGH STREET NORTH ANDOVER, MA 01845
	DRAWN BY D PARHAM	5/18/2001	
OVERALL CABLE LENGTH TOLERANCE: $\leq 12 [305] = +1 [25] / -0$ $> 12 [305] \leq 20 [512] = +2 [51] / -0$ $> 20 [512] \leq 30 [762] = +4 [102] / -0$ $> 30 [762] \leq 40 [1020] = +6 [152] / -0$ $> 40 [1020] = +8% / -0%$	CHECKED BY T CLARK	5/18/2001	CATEGORY
APPROVED BY R CARRICK		5/18/2001	D-SUBMINIATURE
ALL OTHER DIMENSIONAL TOLERANCES: $X = \pm .2 [5.08]$ $XX = \pm .02 [5.1]$ $XXX = \pm .005 [1.3]$	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	PRODUCT DESCRIPTION	HOOD, DB9/HD15 BLK PLASTIC ONE PC
PROJECTION	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321
	SD121-09-0D1	DWG. NO. SD121-09	REV. C
	SCALE: NONE	CAD FILE: SD121-09.SLDDRW	SHEET 1 OF 1