



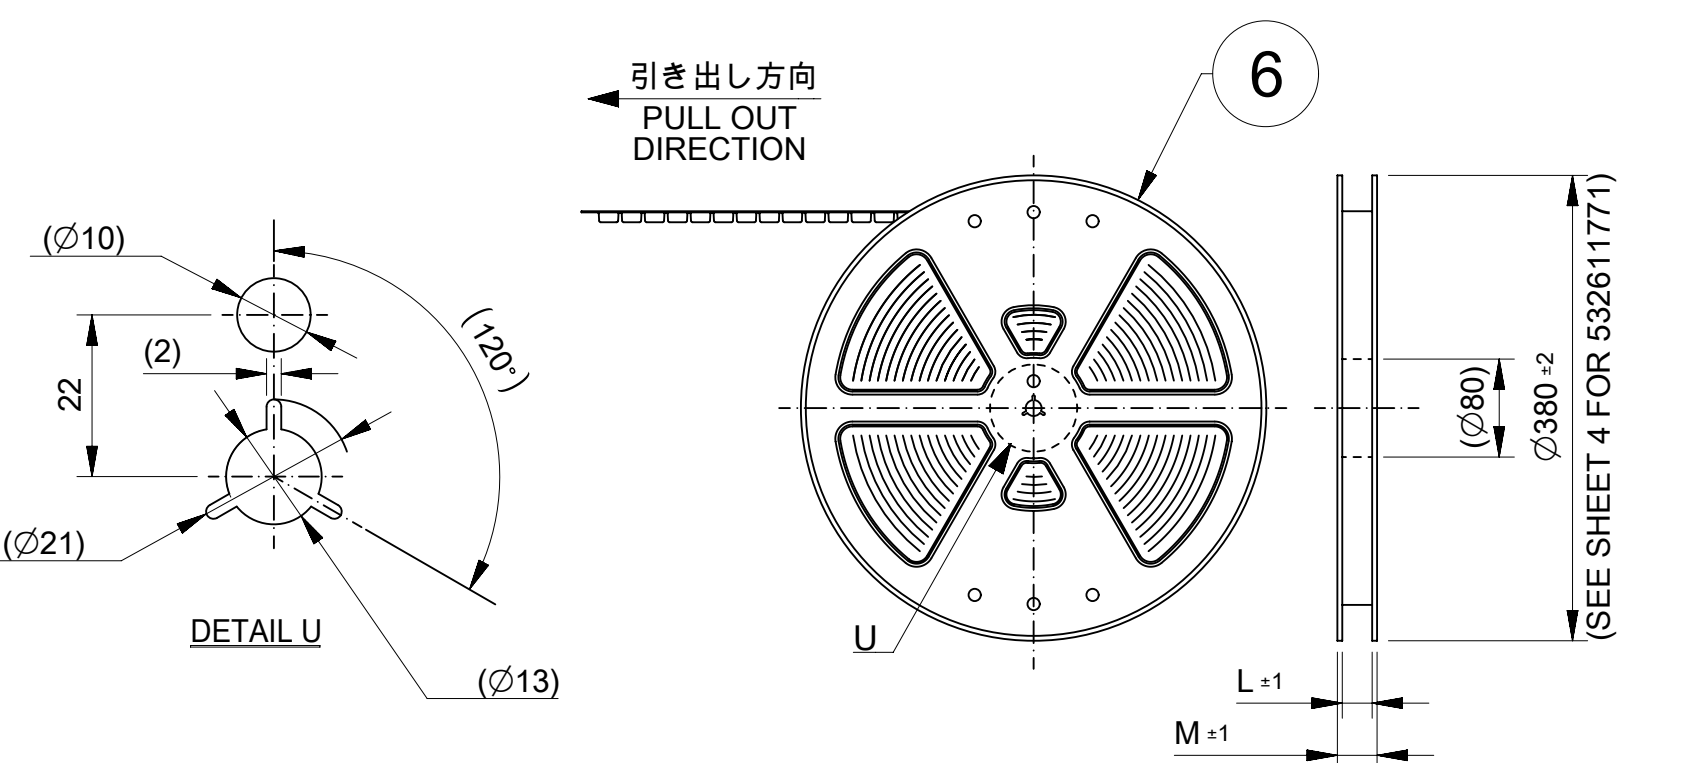

注釈 NOTE

9. 梱包数量: 1600個/リール (532611771についてはSHEET 4を参照)
NUMBER OF CONNECTOR: 1600PCS/REEL
(SEE SHEET 4 FOR 532611771)
10. リードテープ長さ(532611771についてはSHEET 4を参照)
LEAD TAPE LENGTH (SEE SHEET 4 FOR 532611771)

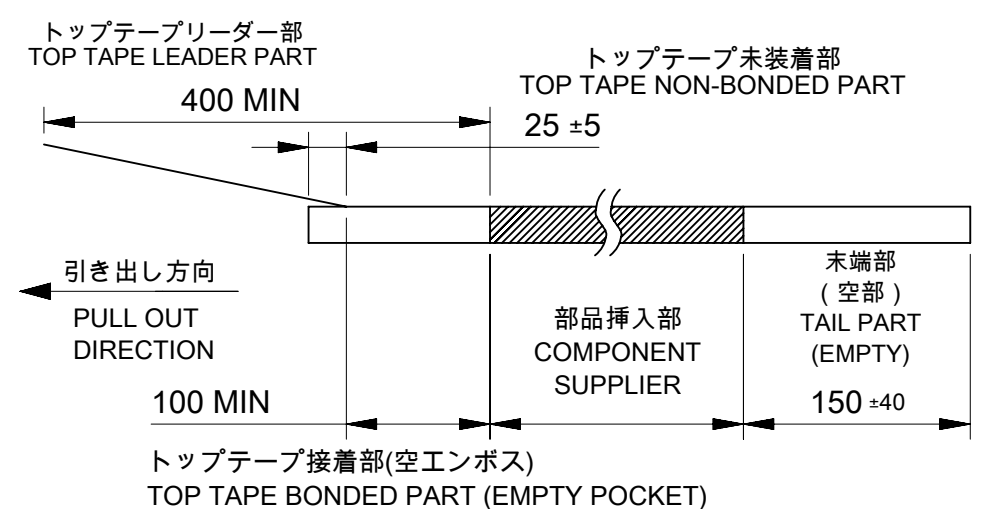



△11 発注番号
ORDER NUMBER
53261****

極数
CIRCUIT



- △12 材料: TABLE 2参照
MATERIAL: REFER TO TABLE 2
- △13 コネクタハウジング平面部
CONNECTOR HOUSING FLAT AREA.
14. トップテープの剥離強度はIEC 60286-3に準拠。
TOP TAPE PEELING FORCE IS DEFINED BY IEC 60286-3.
15. 本製品は乾燥剤入りハイバリア梱包仕様である。
THIS PRODUCT IS HIGH BARRIER PACKAGE WITH DESICCANT.

△12 TABLE2

番号 NO.	部品 PART	材質 MATERIAL
④	キャリアテープ CARRIER TAPE	MXL生産分 : ポリプロピレン(PP) PROCEED BY MXL : POLYPROPYLENE(PP)
		MXK生産分 : ポリスチレン(PS) PROCEED BY MXK : POLYSTYRENE(PS)
⑤	トップテープ TOP TAPE	ポリエチレンテレフタレート (PET)、その他 POLYETHYLENE TEREPHTHALATE (PET), ETC
⑥	リール REEL	ポリスチレン(PS)<リサイクル材を含む> POLYSTYRENE(PS)<RECYCLE MATERIAL CONTAINED >

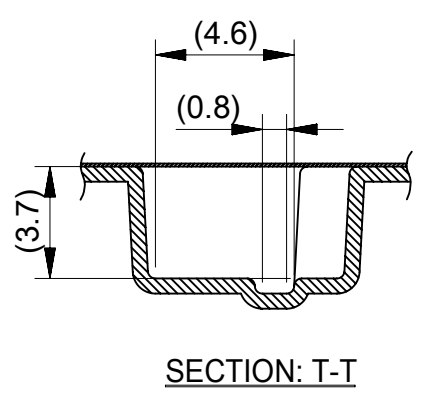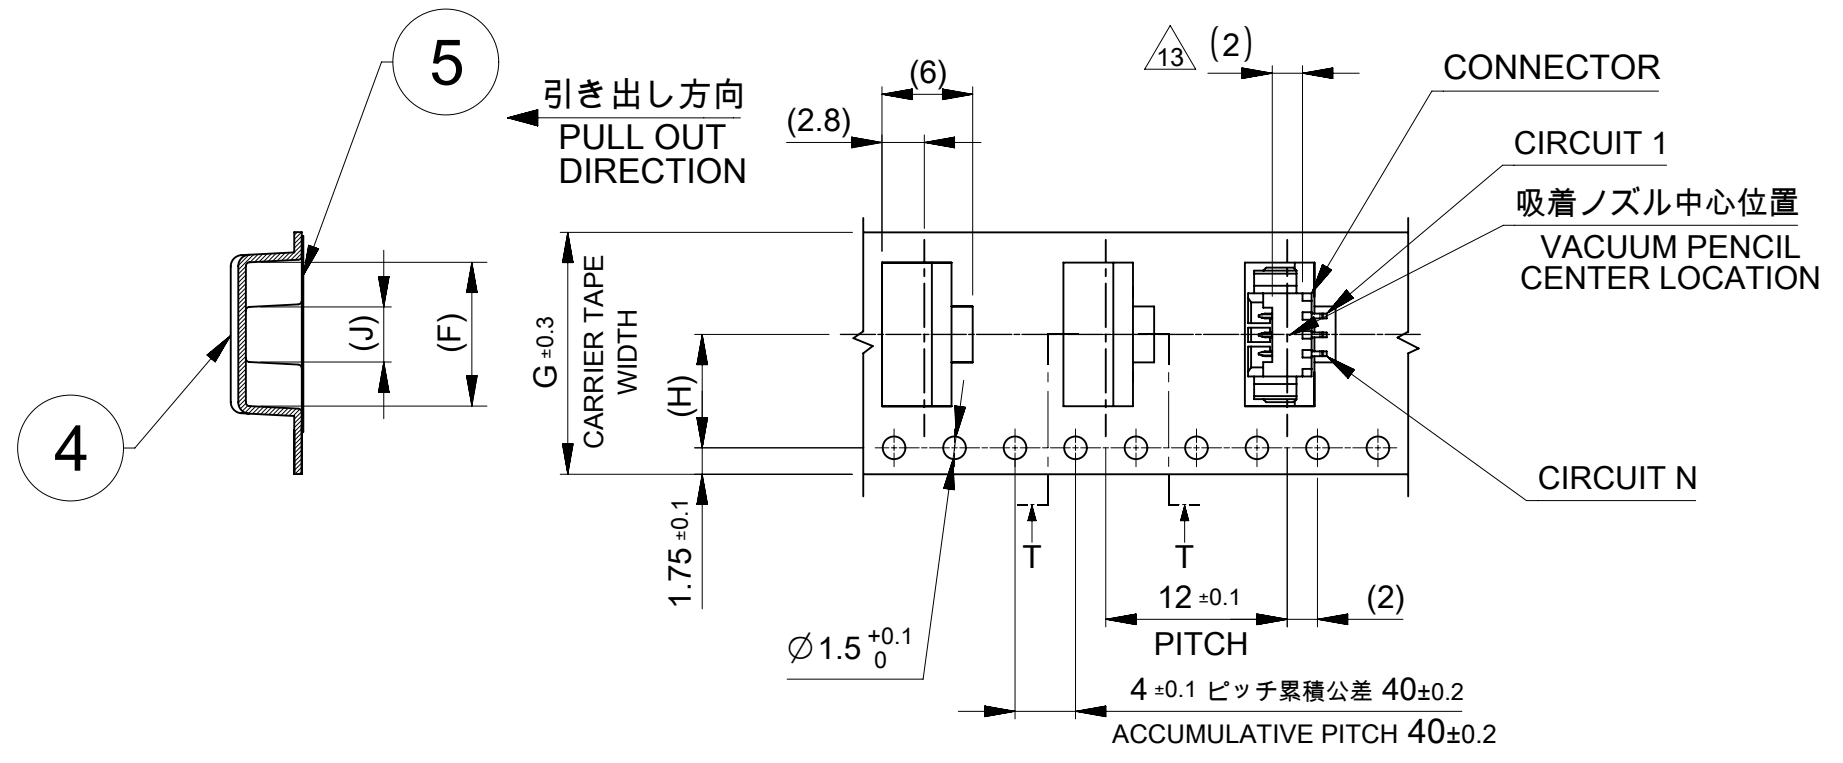

16mm幅(2~3極用)および24mm幅(4~10極用)キャリアテープ
16mm (FOR 2~3 CIRCUIT) OR 24mm (FOR 4~10 CIRCUIT) WIDTH CARRIER TAPE

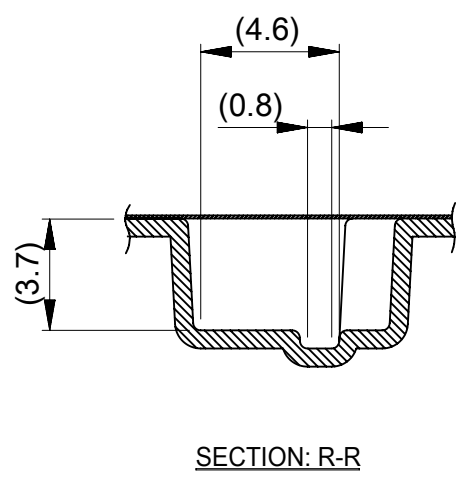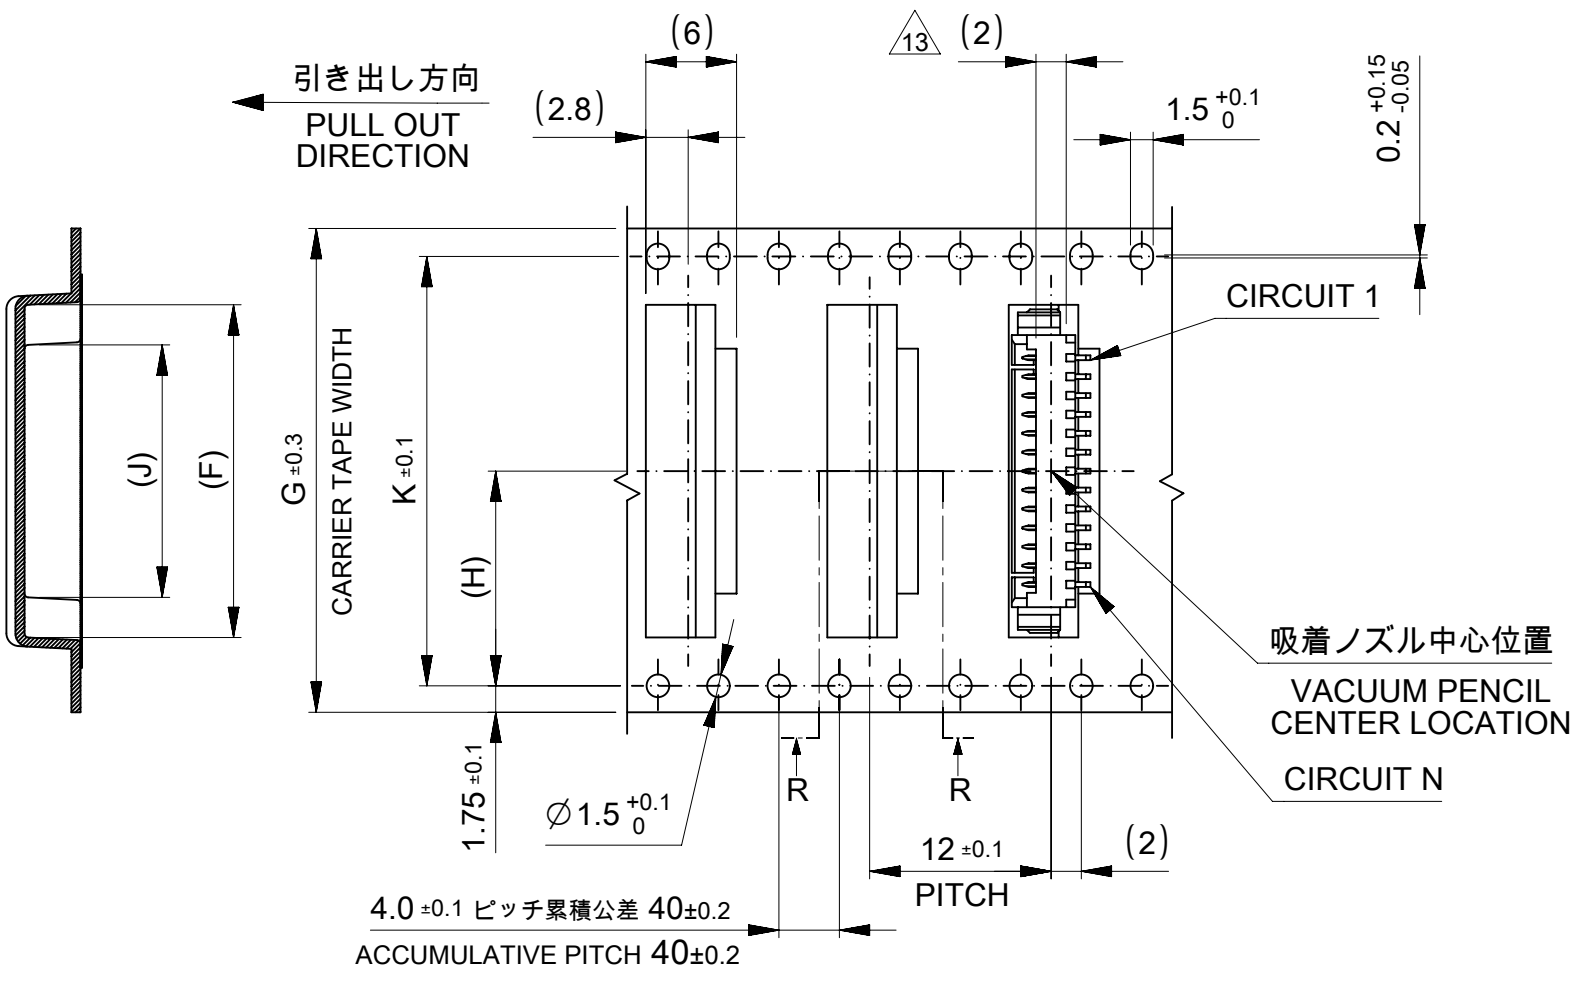

32mm幅(11~13極用)および44mm幅(14~15, 17極用)キャリアテープ
32mm (FOR 11~13 CIRCUIT) OR 44mm (FOR 14~15, 17 CIRCUIT) WIDTH CARRIER TAPE

49.4	45.4	40.4	21.2	20.2	42	27	17
			18.7			24.5	15
			17.45			23.25	14
37.4	33.4	28.4	16.2	14.2	32	22	13
			14.95			20.75	12
			13.7			19.5	11
29.4	25.4	-	12.45	11.5	24	18.25	10
			11.2			17	9
			9.95			15.75	8
			8.7			14.5	7
			7.45			13.25	6
			6.2			12	5
			4.95			10.75	4
21.4	17.4	-	3.7	7.5	16	9.5	3
			2.45			8.25	2
M	L	K	J	H	キャリアテープ幅 G CARRIER TAPE WIDTH G	F	極数 CIRCUIT SIZE

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS

mm

SCALE

NTS

GENERAL TOLERANCES
(UNLESS SPECIFIED)

ANGULAR TOL ± 3.0 °

4 PLACES ± 0.2

3 PLACES ± 0.2

2 PLACES ± 0.2

1 PLACE ± 0.2

0 PLACES ± 0.2

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

CURRENT REV DESC:

EC NO: 744677

DRWN: SSATO02

CHK'D: AIDA

APPR: MARAI

INITIAL REVISION:

DRWN: QHE31

APPR: KOMURAKAMI

THIRD ANGLE PROJECTION

2022/12/16

2023/07/24

2023/07/24

2021/12/15

2021/12/24

DRAWING

SERIES

MATERIAL NUMBER

CUSTOMER

SHEET NUMBER

molex

PICOBLADE 1.25
SMT RIGHT ANGLE TIN PLATING TYPE

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER

532610001-SD

DOC TYPE

PSD

DOC PART

000

REVISION


E

3 OF 4

△2 適合製品及び各種仕様書
APPLICABLE PRODUCTS AND SPECIFICATIONS


梱包仕様書 PACKING SPECIFICATION		PART NUMBER		SPECIFICATION NUMBER	
		53261**71 / 53261**27		SPK-53261-002 532619200-SPK (ONLY 532611771)	
適合ハウジング APPLICABLE HOUSING		PART NUMBER			
		51021**00			
適合圧着端子 APPLICABLE TERMINAL	PLATING	TIN			
	PART NUMBER	500798*00	500588*00	500798001	500588001
	WIRE SIZE (AWG)	#26-28	#28-32	#26-28	#28-32
製品仕様書 PRODUCT SPECIFICATION		PS-51021-024 PS 001		510211124-PS PS 000	
アプリケーション仕様書 (取扱説明書) APPLICATION SPECIFICATION		510210000-AS PS 000			

532611771に適用
APPLIES TO 532611771

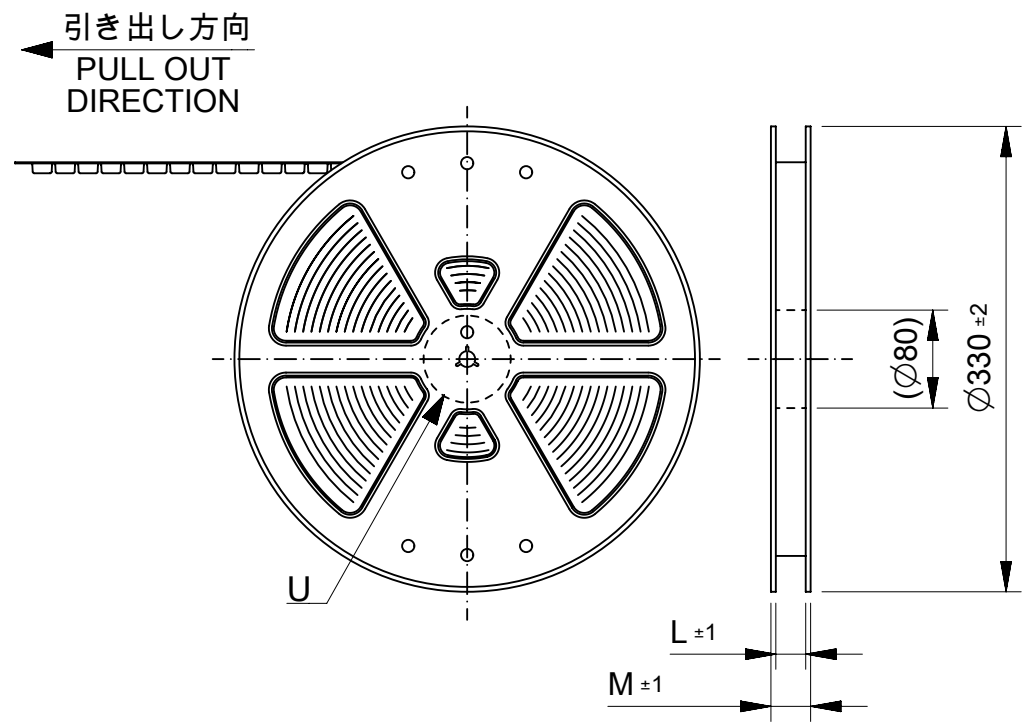


17. 梱包数量: 1000個/リール
NUMBER OF CONNECTOR: 1000PCS/REEL

18. リードテープ長さ
LEAD TAPE LENGTH

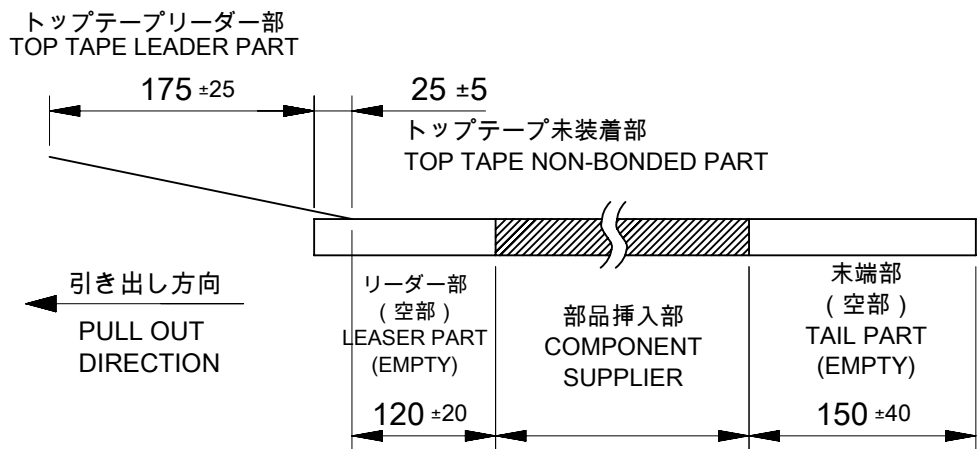

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										
DIMENSION UNITS		SCALE		CURRENT REV DESC:			molex PICOBLADE 1.25 SMT RIGHT ANGLE TIN PLATING TYPE			
mm		NTS								
GENERAL TOLERANCES (UNLESS SPECIFIED)										
ANGULAR TOL		±	3.0 °		EC NO: 744677 DRWN: SSATO02 2022/12/16 CHK'D: AIDA 2023/07/24 APPR: MARAI 2023/07/24					
4 PLACES		±	0.2							
3 PLACES		±	0.2							
2 PLACES		±	0.2							
1 PLACE		±	0.2							
0 PLACES		±	0.2		INITIAL REVISION: DRWN: QHE31 2021/12/15 APPR: KOMURAKAMI 2021/12/24					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS										
THIRD ANGLE PROJECTION		DRAWING		SERIES		DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION
		A2-SIZE		53261		532610001-SD		PSD	000	E
MATERIAL NUMBER		CUSTOMER			SHEET NUMBER					
SEE CHART		GENERAL			4 OF 4					

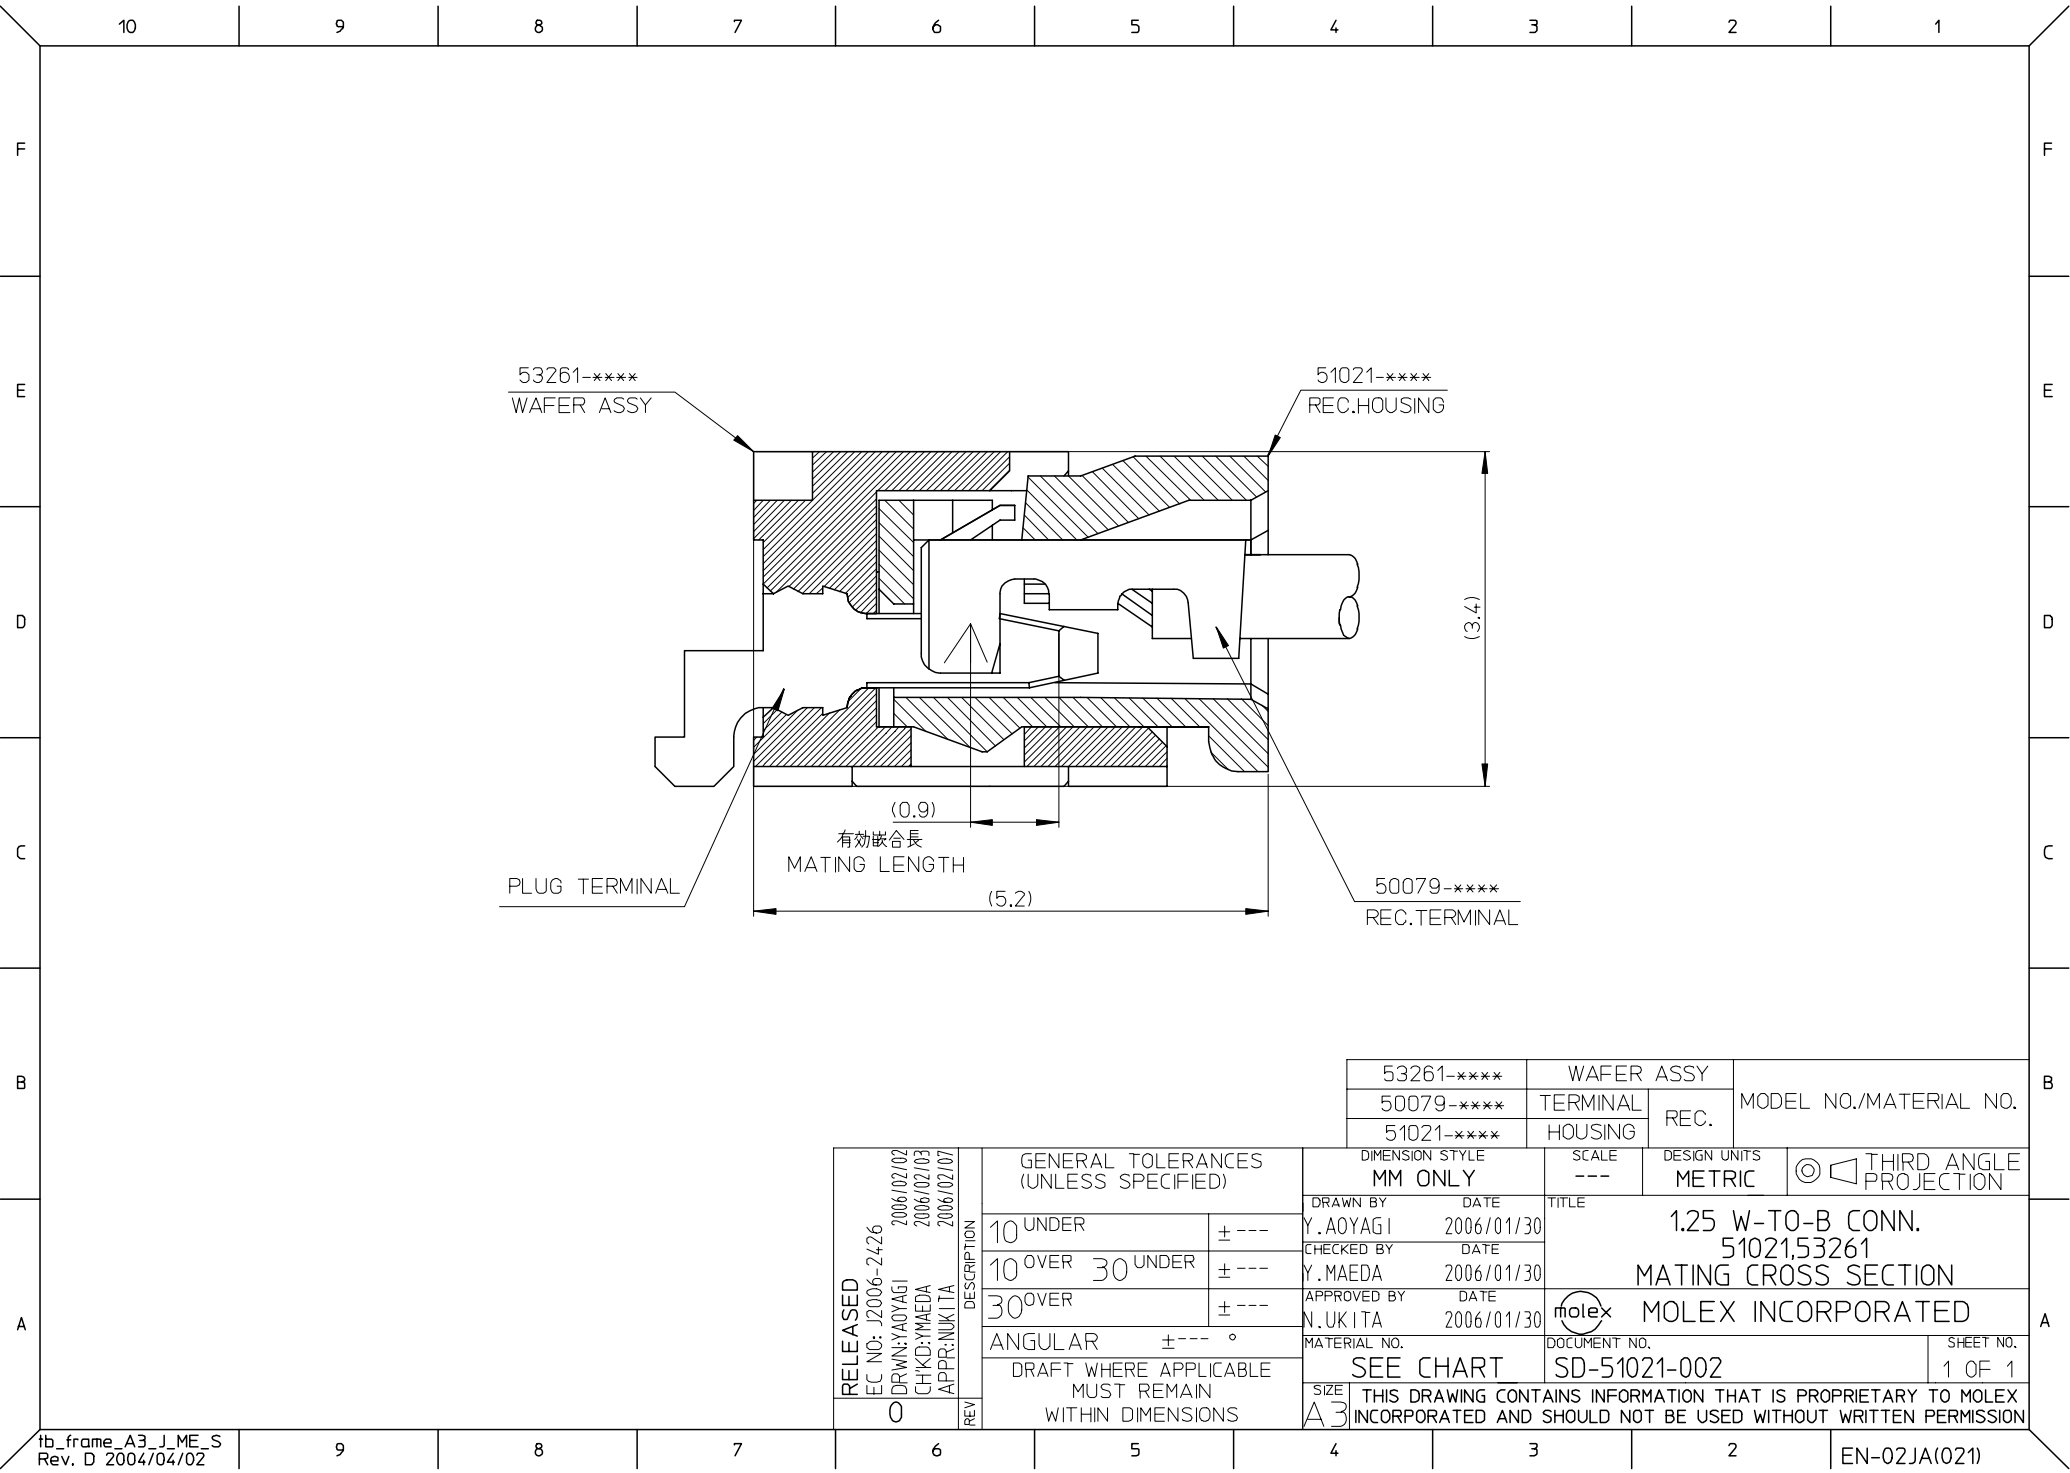

53261-****	WAFER ASSY	MODEL NO./MATERIAL NO.
50079-****	TERMINAL	
51021-****	HOUSING	

RELEASED EC NO: J2006-2426 DRWN:YAOYAGI 2006/02/02 CHKD:YMAEDA 2006/02/03 APPR:NUKITA 2006/02/07 0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± ---	Y.AOYAGI	2006/01/30	TITLE 1.25 W-TO-B CONN. 51021,53261 MATING CROSS SECTION				
		10 OVER 30 UNDER	± ---	Y.MAEDA	2006/01/30					
		30 OVER	± ---	N.UKITA	2006/01/30	MOLEX INCORPORATED				
		ANGULAR ±--- °		MATERIAL NO.			DOCUMENT NO.			SHEET NO.
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART			SD-51021-002			1 OF 1	
	REV			SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					