


REVERSE VOLTAGE: 50 to 1000 VOLTS
FORWARD CURRENT: 10.0 AMPERE

FEATURES

- High surge current capability
- Plastic package has Underwriters Laboratory Flammability Classification 94V-O utilizing Flame Retardant Epoxy Molding Compound.
- Void-free Plastic in a R-6 package.
- High current operation 10.0 ampere at $T_A=55^{\circ}\text{C}$
- Exceeds environmental standards of MIL-S-19500/228

MECHANICAL DATA

Case: Molded plastic, R-6
 Epoxy: UL 94V-O rate flame retardant
 Lead: Axial leads, solderable per MIL-STD-202, method 208 guaranteed
 Polarity: Color band denotes cathode end
 Mounting position: Any
 Weight: 0.07ounce, 2.1gram

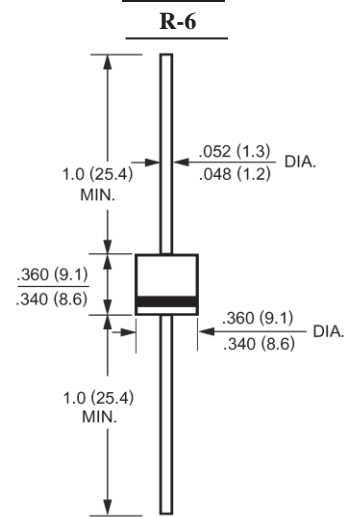

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.
 Single phase, half wave, 60Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

	Symbols	10A05	10A1	10A2	10A4	10A6	10A8	10A10	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current 0.375"(9.5mm) Lead Length at $T_A=55^{\circ}\text{C}$	$I_{(AV)}$	10.0							Amp
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	400							Amp
Maximum Forward Voltage at 10.0A DC and 25°C	V_F	1.1							Volts
Maximum Reverse Current at $T_A=25^{\circ}\text{C}$ at Rated DC Blocking Voltage $T_A=100^{\circ}\text{C}$	I_R	10.0 1000							uAmp
Typical Junction Capacitance (Note 1)	C_J	150							pF
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$	8							$^{\circ}\text{C}/\text{W}$
Operating Junction Temperature Range	T_J	-55 to +150							$^{\circ}\text{C}$
Storage Temperature Range	T_{stg}	-55 to +150							$^{\circ}\text{C}$

NOTES:

- 1- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.
- 2- Thermal Resistance From Junction to Ambient 0.375"(9.5mm) lead length P.C.B. Mounted with 1.1x1.1" (30x30mm)copper pads.

REVERSE VOLTAGE: 50 to 1000 VOLTS
FORWARD CURRENT: 10.0 AMPERE

FIG.1-TYPICAL FORWARD CHARACTERISTICS

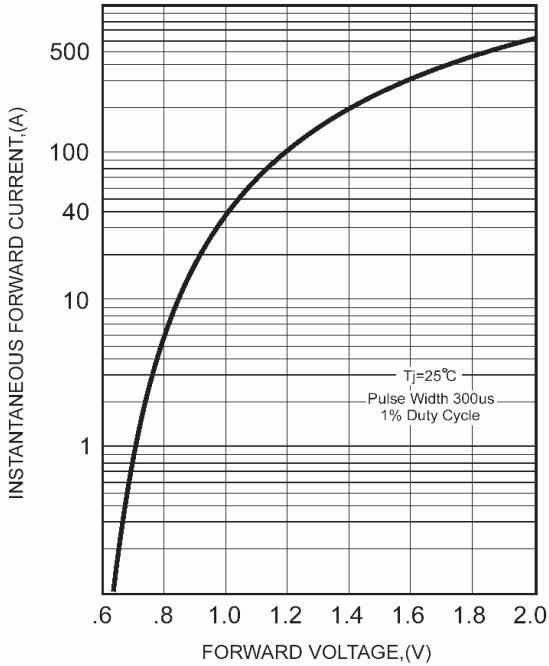


FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE

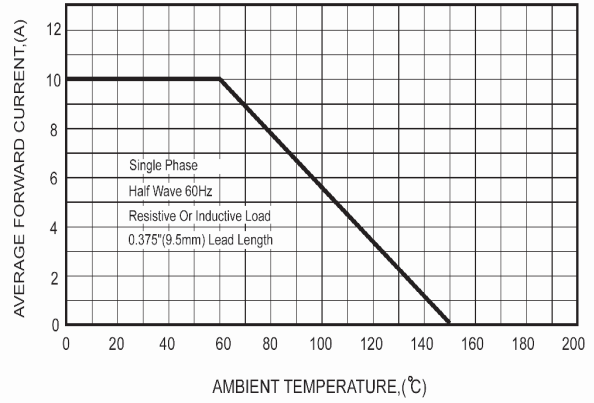


FIG.4-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

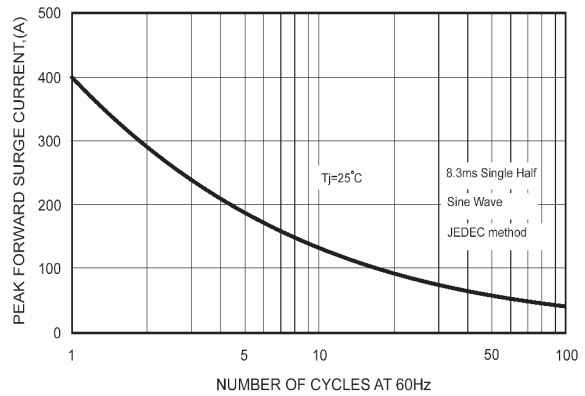


FIG.3 - TYPICAL REVERSE CHARACTERISTICS

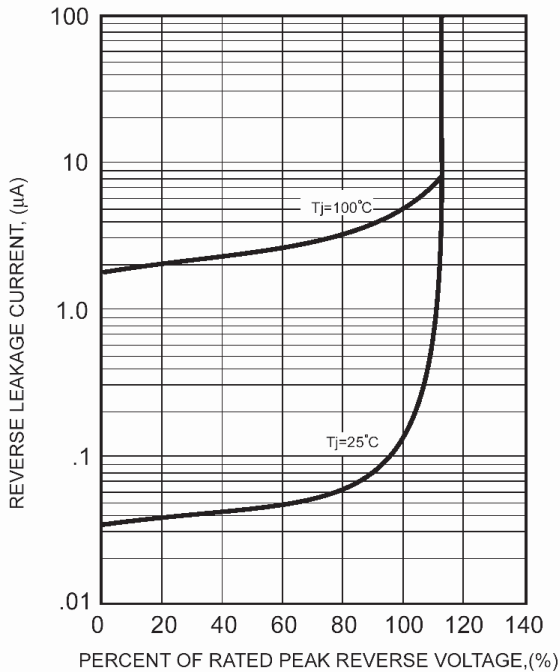


FIG.5 - TYPICAL THERMAL RESISTANCE VS. LEAD LENGTH

